

# Computerized Multiple Criteria Decision Making Model for Projects Planning & Implementation

by

Alireda A. Al-Jaroudi

A Thesis Presented to the

FACULTY OF THE COLLEGE OF GRADUATE STUDIES

KING FAHD UNIVERSITY OF PETROLEUM & MINERALS

DHAHRAN, SAUDI ARABIA

In Partial Fulfillment of the  
Requirements for the Degree of

**MASTER OF SCIENCE**

In

**CONSTRUCTION ENGINEERING AND MANAGEMENT**

December, 1998

## **INFORMATION TO USERS**

This manuscript has been reproduced from the microfilm master. UMI films the text directly from the original or copy submitted. Thus, some thesis and dissertation copies are in typewriter face, while others may be from any type of computer printer.

**The quality of this reproduction is dependent upon the quality of the copy submitted.** Broken or indistinct print, colored or poor quality illustrations and photographs, print bleedthrough, substandard margins, and improper alignment can adversely affect reproduction.

In the unlikely event that the author did not send UMI a complete manuscript and there are missing pages, these will be noted. Also, if unauthorized copyright material had to be removed, a note will indicate the deletion.

Oversize materials (e.g., maps, drawings, charts) are reproduced by sectioning the original, beginning at the upper left-hand corner and continuing from left to right in equal sections with small overlaps. Each original is also photographed in one exposure and is included in reduced form at the back of the book.

Photographs included in the original manuscript have been reproduced xerographically in this copy. Higher quality 6" x 9" black and white photographic prints are available for any photographs or illustrations appearing in this copy for an additional charge. Contact UMI directly to order.

# **UMI**

**A Bell & Howell Information Company**  
300 North Zeeb Road, Ann Arbor MI 48106-1346 USA  
313/761-4700 800/521-0600



**COMPUTERIZED MULTIPLE CRITERIA DECISION MAKING  
MODEL FOR PROJECTS PLANNING & IMPLEMENTATION**

**BY**

**ALIREDA A. AL-JAROUDI**

**A Thesis Presented to the  
FACULTY OF THE COLLEGE OF GRADUATE STUDIES  
KING FAHD UNIVERSITY OF PETROLEUM & MINERALS  
DHAHRAN, SAUDI ARABIA**

**In Partial Fulfillment of the  
Requirements for the Degree of**

**MASTER OF SCIENCE  
In  
CONSTRUCTION ENGINEERING AND MANAGEMENT**

**December, 1998**

**UMI Number: 1393203**

---

**UMI Microform 1393203**  
**Copyright 1999, by UMI Company. All rights reserved.**

**This microform edition is protected against unauthorized  
copying under Title 17, United States Code.**

---

**UMI**  
**300 North Zeeb Road**  
**Ann Arbor, MI 48103**

**KING FAHD UNIVERSITY OF PETROLEUM & MINERALS**

**DHAHRAN, SAUDI ARABIA**


**COLLEGE OF GRADUATE STUDIES**

This thesis, written by ALIREDA AHMED AL-JAROUDI under the direction of his Thesis Advisor and approved by his Thesis Committee, has been presented to and accepted by the Dean of College of Graduate Studies, in partial fulfillment of the requirements for the degree of **MASTER OF SCIENCE IN CONSTRUCTION ENGINEERING & MANAGEMENT**.

**THESIS COMMITTEE**

  
Dr. Sadi Assaf (Chairman)


  
Dr. M. Osama Jannadi (Member)

  
Dr. Mohammed A. Al-Sughaiyer (Member)

  
Department Chairman

  
Dean, College of Graduate Studies

8-12-98  
Date



*I dedicate this thesis to my father, my mother, and especially to my wife and my children: Wela'a, Atheer, Ala'a and Ahmed. Their continuous support, patience and encouragement have helped me to accomplish this research successfully.*

## **ACKNOWLEDGEMENT**

I would like to express my thanks and appreciation to King Fahd University of Petroleum & Minerals for supporting this research.

My special thanks and appreciation to Professor Sadi Assaf who served as the thesis committee chairman and who provided me with excellent guidance and support. I would also express my thanks to other members of the thesis committee, Professors: M. Osamah Janandi, (Dean of College of Environmental Design) and Mohammed A. AL-Sughaiyer from the Civil Engineering Department. All of these individuals provided me with excellent guidance, support and encouragement that contributed to the success of this research.

Thanks to the participants in the survey. Their effort in providing the information for the research was very valuable and helped me to complete this research successfully.

Finally, special thanks to all members of my family, my friends and colleagues for their support and encouragement.



<b>TABLE OF CONTENT</b>	<b>PAGE NO.</b>
ACKNOWLEDGEMENT.....	III
TABLE OF CONTENT.....	IV
LIST OF FIGURES.....	VI
LIST OF TABLES.....	VII
THESIS ABSTRACT.....	VIII
THESIS ABSTRACT – ARABIC.....	IX
 <b>CHAPTER 1</b>	
DECISION MAKING PROCESS.....	1
1.1 INTRODUCTION.....	1
1.2 PROBLEM STATEMENT.....	2
1.3 RESEARCH OBJECTIVE, SCOPE & LIMITATION.....	4
1.4 RESEARCH METHODOLOGY.....	4
 <b>CHAPTER 2</b>	
PREVIOUS STUDIES.....	5
 <b>CHAPTER 3</b>	
THE ANALYTIC HIERARCHY PROCESS (AHP).....	14
3.1 INTRODUCTION.....	14
3.2 THE AHP STEPS.....	15
3.3 MATHEMATICAL EXPLANATION OF AHP.....	21
3.4 CONSISTENCY.....	24
3.5 PRIORITIZATION.....	27
3.6 DECOMPOSITION AND AGGREGATION OR CLUSTERING.....	27
3.7 AHP CALCULATION STEPS.....	29
 <b>CHAPTER 4</b>	
DECISION CRITERIA FOR THE SELECTION OF PROJECTS ALTERNATIVES.....	32
4.1 INTRODUCTION.....	32
 <b>CHAPTER 5</b>	
SURVEY AND DATA ANALYSIS.....	42
 <b>CHAPTER 6</b>	
COMPUTERIZED DECISION MAKING MODEL.....	56
6.1 INTRODUCTION.....	56
6.2 PROGRAM LIMITATIONS.....	57
6.3 FLOW CHART OF THE PROGRAM STEP BY STEP CALCULATION.....	57
6.4 PROGRAM STEP BY STEP CALCULATION.....	59
6.5 PROGRAM DESCRIPTION.....	69
6.5.1 THE PROGRAM SUBROUTINES.....	71
6.5.1.2 INITIAL INPUT DATA MODULE SUBROUTINES.....	71
6.5.1.3 CRITERIA PAIRWISE CALCULATION MODULE.....	74
6.5.1.4 ALTERNATIVES INITIAL INPUT DATA MODULE SUBROUTINES.....	77
6.5.1.5 ALTERNATIVES PAIRWISE CALCULATION MODULE SUBROUTINES.....	78
6.5.1.6 SYNTHESIS CALCULATION MODULE SUBROUTINE.....	82

<b>TABLE OF CONTENT</b>	<b>PAGE NO.</b>
<b>CHAPTER 7</b>	
PROJECT ALTERNATIVES EVALUATION PROBLEM – CASE STUDY .....	83
7.1 SCOPE.....	83
7.2 ALTERNATIVES .....	83
7.3 METHODOLOGY APPLICATION AND DISCUSSION .....	84
7.4 CRITERIA PAIRWISE COMPARISON .....	92
7.5 ALTERNATIVES WITH RESPECT TO CRITERIA PAIRWISE COMPARISON	98
<b>CHAPTER 8</b>	
SUMMARY, CONCLUSION & RECOMMENDATION .....	114
8.1 SUMMARY.....	114
8.2 CONCLUSION	115
8.3 RECOMMENDATIONS FOR FUTURE RESEARCH.....	115
<b>APPENDIX A</b>	
SURVEY AND SURVEY RESULTS.....	117
<b>APPENDIX B</b>	
PROGRAM CODES LISTING.....	127
<b>APPENDIX C</b>	
INPUT DATA FILES.....	209
<b>APPENDIX D</b>	
OUTPUT DATA FILES.....	225
<b>REFERENCES.....</b>	<b>236</b>

<b>LIST OF FIGURES</b>	<b>PAGE NO.</b>
1. PAIRED COMPARISON	7
2. EVALUATION MATRIX	7
3. UTILITY FUNCTION	10
4. STANDARD HIERARCHICAL STRUCTURE	16
5. THE PROGRAM STEPS	58
6. PROGRAM STRUCTURE	70
7. THE DECISION HIERARCHY	85
8. INITIAL INPUT DATA	108
9. CRITERIA PW COMPARISONS & CONSISTENCY CHECK	109
10. JUDGMENTS & PRIORITIES OF THE MODEL'S MAIN CRITERIA	110
11. ALTERNATIVES INITIAL INPUT DATA	111
12. JUDGMENTS & PRIORITIES OF ALTERNATIVES WITH RESPECT TO COST CRITERIA	112
13. SYNTHESIS –FINAL RESULTS	113

<b>LIST OF TABLES</b>	<b>PAGE NO.</b>
1. RANDOM INDEX	31
2. PARTICIPANTS LIST	42
3. CRITERIA AND SUB-CRITERIA LIST WITH MEAN INFLUENCE	44
4. MAIN CRITERIA INFLUENCE	47
5. CRITERIA INFLUENCE RANKED FROM HIGHEST TO LOWEST	49
6. PROJECT RELATED CRITERIA	54
7. VENDOR RELATED CRITERIA	54
8. SYSTEM RELATED CRITERIA	55
9. INITIAL DATA MODULE SUBROUTINES	72
10. CRITERIA PAIRWISE COMPARISON MODULE SUBROUTINES	75
11. ALTERNATIVES INITIAL DATA MODULE SUBROUTINES	77
12. ALTERNATIVES PAIRWISE COMPARISONS MODULE SUBROUTINE	79
13. SYNTHESIS MODULE SUBROUTINES	82
14. CRITERIA GROUPING AND THEIR ABBREVIATIONS	89
16-31. CRITERIA PAIRWISE COMPARISON TABLES	92-97
32-80. ALTERNATIVES PAIRWISE COMPARISON TABLES	98-106
81. INITIAL DATA INPUT	106

# **Thesis Abstract**

**NAME OF STUDENT :**     **ALIREDA A. AL-JARUDI**

**TITLE OF STUDY     :**     **Computerized Multiple Criteria Decision Making  
Model For Projects Planning and  
Implementation**

**MAJOR FIELD         :**     **Construction Engineering & Management**

**DATE OF DEGREE     :**     **December 1998**

Projects are initiated and implemented to promote investment and maintain the competitiveness of the company. In order for projects to be successful, the company management must come up with the best decisions during the planning and implementation phases of these projects. Quite often these decisions are inadequate, lack consistency and fail to consider all the relevant criteria. In this research, a computerized multi-criteria decision-making model based on the Analytic Hierarchy Process (AHP) has been developed to assist in decision making for projects. This process incorporates the quantitative and qualitative aspects of the decision-making problem and provides a measure for determining the consistency of the decision-maker. Additionally, a survey has been conducted to gather information about the criteria that influence the decisions for ranking and evaluating telecommunications projects alternatives. Selected professional who play a major role in decision making were asked to participate in this survey. To demonstrate the usefulness and application of the model, it has been applied on a telecommunications project for a major industrial company using the criteria that resulted from the questionnaires.

**MASTER OF SCIENCE DEGREE**

**KING FAHD UNIVERSITY OF PETROLEUM, AND MINERALS**

**DHAHRAN, SAUDI ARABIA**

**DECEMBER 1998**

# خلاصة الرسالة

اسم الطالب : علي رضا بن أحمد الجارودي

عنوان الرسالة : نموذج مرمج بواسطة الحاسب الآلي للمساعدة

في إتخاذ القرارات المتعددة المعايير لتخطيط

وتنفيذ المشاريع

التخصص : هندسة وإدارة التشييد

تاريخ الشهادة : ديسمبر ١٩٩٨

ترسى المشاريع وتنفذ لزيادة الاستثمارات وللبقاء على روح المنافسة لمواكبة متطلبات الحاضر والمستقبل. لضمان نجاح هذه المشاريع يجب على إدارة الشركة والمستثمرين في الشركة اخذ قرارات نهائية لإختيار أفضل الخيارات المطروحة لتخطيط وتنفيذ هذه المشاريع. هذه القرارات غالباً ما تكون غير مبنية على أساس موضوعي ولا تأخذ في الاعتبار كل العوامل المؤثرة في إتخاذ القرار. وهنا تبدو الحاجة إلى البحث عن أسلوب منهجي وعلمي يأخذ في عين الاعتبار كل العوامل المؤثرة للمساعدة في أخذ هذه القرارات. في هذه الرسالة تم تطوير نموذج مبني على أساس نظرية التحليل الهرمي بواسطة الحاسب الآلي للمساعدة في إتخاذ هذه القرارات. هذا النموذج يأخذ في الاعتبار التحليل الكمي والنوعي للعوامل المؤثرة في القرار. كمل تم عمل استبيان لاستكشاف المعايير المؤثرة في إتخاذ القرار وتم توزيعه على مجموعة مختارة من المهندسين ذوي الخبرة والذي يكون إتخاذ القرار جزء من عملهم. وتم تطبيق هذا النموذج مستخدماً المعايير التي نتجت عن الاستبيان على أحد مشاريع الاتصالات لإحدى الشركات الصناعية الكبرى لعرض كيفية استخدامه وفوائده.

## درجة الماجستير في العلوم

جامعة الملك فهد للبترول والمعادن

الظهران , المملكة العربية السعودية

بِسْمِ اللَّهِ الرَّحْمَنِ الرَّحِيمِ

## **CHAPTER ONE**

### **DECISION MAKING PROCESS**

#### **1.1 INTRODUCTION**

Projects are implemented to achieve certain goals. These goals may include increasing the company's profit or enhancing its competitiveness in order to survive the future. In order for projects to be successful, the company must come up with the best project alternative to achieve the business objectives.

At the time of the preliminary engineering study, the decision making team is faced with a dilemma in which more than one objective needs to be satisfied in its decision making process. The need to satisfy these objectives simultaneously is a major factor in determining their order of preference for the available project alternatives.

Although the project goals are defined, it is not clear as to how such goals can be measured or achieved. They are usually stated in an abstract, elusive and unclear manner, (8).

Problems that might be encountered during the decision making process may include: complexity of the decision, inconsistency of the decision maker, political favors and hidden agenda by the decision maker, overlooking the objective of the project, conflict between individuals, variation of perception from one individual to another, just to name a few. To avoid these problems and improve the decision-making process, a structured and comprehensive computerized Multi-Criteria Decision-Making Model based on the Analytic Hierarchy Process (AHP) that assists in selecting the best project alternative is presented in this research. The



model will help to focus the decision-maker's attention on the main objective of the project. It has been applied to a case study to demonstrate its usefulness.

The research will consider only telecommunications projects. Factors that are considered in the decision-making model are the factors that influence the decision making with regard to the system selection and the project. These factors are obtained from literature review, survey and previous telecommunications projects documentation.

The next section discusses the problem statement. Previous studies are discussed in chapter two, the AHP methodology is presented in chapter three, factors that influence the decision are discussed in chapter four, and analysis and results are presented in chapter five. Chapter six discusses the computerized model. The program structure is presented through an application example to rank telecommunications projects in chapter seven. Finally, summary and concluding remarks are discussed in chapter eight.

## **1.2 PROBLEM STATEMENT**

During the preliminary engineering phase of a project, its impact on the company should be kept in proper perspective. Usually, there is an array of possible alternative solutions to any project design problem. Deciding on which alternative is difficult.

Quite often, owners do not consider alternatives to their investment projects for comparison. When owners do consider alternatives to their projects, they may compare cost only, or conduct the type of cost benefit analysis, which has been traditionally employed, (4). However, projects involve environmental, political, and other intangible factors, which are usually ignored in the cost-benefit analysis

because they cannot be measured in monetary units. Such decisions dealing with cost-benefits only are inadequate decisions.

During the decision making process, conflict may exist among the decision-makers because of their different concerns and goals which may not match the stated organizational objectives, (4,1). Variations in the perception of the (various) individuals involved is another problem. What is new technology to one individual might not be so new to another, (3).

Other problems might be encountered if the decision making team does not consider the specific requirements of the organizations that will be affected by the project. For example, if the decision-makers overlook the operational aspects of a chosen system or the requirements of the end users then the decision will be wrong and have an adverse impact on the company.

Therefore, to avoid these problems and improve the decision-making process, it is recommended that a structured and comprehensive computerized decision-making approach be developed to ensure that the best project is selected for the alternatives available during the preliminary engineering phase. Additionally, this model can assist in all decision situations for the project.

By following this approach, the team can quantify the subjective measurements, proceed logically and come up with the most feasible solution.

### **1.3 RESEARCH OBJECTIVE, SCOPE & LIMITATION**

The objective of this research is to develop a computerized Decision Support Model based on a Multi-Criteria Decision making approach to assist in all decision making situations that involve selection of alternatives. This model will be applied to a case study to demonstrate its feasibility. The research will consider only telecommunications projects that are implemented by Saudi Aramco. Factors that will be considered in the decision model will be the factors that influence the decision making with regard to the system selection and project implementation. These factors are obtained from literature review, survey and documentation associated with previous telecommunications projects.

### **1.4 RESEARCH METHODOLOGY**

- 1.4.1 Determine the evaluation criteria for selecting project alternatives. These will be obtained from the literature review, and documentation of previous projects.
- 1.4.2 Conduct a survey by distributing questionnaires to gather information pertaining to the evaluation criteria and their relative importance in the decision making process.
- 1.4.3 Present the selected method and discuss its mathematics and applications.
- 1.4.4 Develop a computerized model based on the selected method.
- 1.4.5 Apply the computerized model on a real project to demonstrate its usefulness and application.

## CHAPTER TWO

### PREVIOUS STUDIES

Previous studies were found in the literature that talked about methods of selecting project alternatives. Such methods have been used in Value Engineering. AL-Sughaiyer conducted a study, (1987), where he talked about the application of Value Engineering on public construction projects in Saudi Arabia, (28). In the Value Engineering study, alternatives are compared by using weighted evaluation to help in selecting the best alternative from the many alternatives available. It enables many factors other than cost to be considered in the evaluation of alternatives. Parker in his book, Value Engineering Theory, (1985), presented this method, (7). The method consists of two processes, the Paired Comparison Criteria Weighting Process and the Evaluation Matrix.

Under the Paired Comparison Criteria Weighting Process, criteria that influence the decision making for selecting an alternative are listed. Then the importance of each of these criteria to the decision-maker is determined. Each criterion is assigned a letter of the alphabet. When selecting between two criteria, the degree of importance of one criterion over another can be:

- *Major* (3 points),
- *Medium* ( 2 points),
- *Minor* ( 1 point),
- *No preference* (0 point).

For example if criterion (A) is considered to be less importance than criterion (D), then criterion (A) receives a score of 2. Therefore, the comparison between (A) and

(D) in the criteria-scoring matrix is recorded with the notation A-2. If it is not possible to decide/differentiate between two criteria, each will receive as an example (s) one point, criterion (D) and criterion (B), the notation will be recorded in the matrix as D/B.

The raw score of all criteria is then adjusted to a scale of 1-10 with, 10 assigned to the criteria with the highest raw score and other scores adjusted accordingly.

Once the criteria elements and their weights have been established, they are entered in what is called an Evaluation Matrix as shown in figure 2. First each criterion is ranked against each alternative. A scoring scale of 1-5 is used as follows:

<i>Excellent</i>	=	5
<i>Very Good</i>	=	4
<i>Good</i>	=	3
<i>Fair</i>	=	2
<i>Poor</i>	=	1

Then the rank of each alternative with the weight of criterion is multiplied and the result is entered in the Matrix. After that, the total score is summed up for each alternative and ranked for selection. The Alternative with the highest total score is the one to be selected.

	A	B	C	D	E
A			A-2		
B			B/D		
C					
D					
E					

Criteria	Raw Score	Assigned Score
Criteria A		
Criteria B		
Criteria C		
Criteria D		
Criteria E		
Criteria F		

*Figure 2.1 the Paired Comparison*

<i>Alternative : The Evaluated Alternative</i>					
Criteria	Weight	Excellent	V.Good	Good	Fair
Criteria A					
Criteria B					
Criteria C					
Criteria D					
Criteria E					
Criteria F					

*Figure 2.2 Evaluation Matrix*

The author of this thesis, Maqbool Ahmed and Ghadri, (10), conducted a value engineering study for the Riyadh-Pump Station No.3 Fiber Optic System Project for Saudi Aramco, where they used the weighted evaluation as discussed by Parker in his book. The purpose of their study was to select the best alternative for the fiber optic project. In that study using the weighted criteria method, few criteria were considered. The decision criteria for selecting alternatives for the fiber optic system included Initial Cost, Operation & Maintenance Cost, Technological Life, System Compatibility, Field Proven, Saudi Aramco Ownership & Control and Replacement.

This method can handle only a few / a limited number of decision criteria and it is sometimes difficult to use. Additionally, it has a limitation on its scale; using only a 5-point scale in making judgment.

Other studies used the Fuzzy Multi-criteria concept for Comparing Projects using the fuzzy set theory. Zadeh, (19), initiated the fuzzy set theory in 1965. With this theory, values are assigned a membership from 0 to 1 in the set, where 1 indicates means membership in the set and 0.5 means that it is equally likely to be in the set or out of the set. For example, the value for the system capacity could be defined as 0.8 low, 0.4 medium and 0.1 high. The Fuzzy set theory lays out the means relating the fuzzy sets and manipulating fuzzy relations, (19). D.E. Mitali DE and Hipel (1987) developed and applied a Fuzzy Multicriteria Model for Comparing Energy Projects, (4). In their study, they presented a fuzzy set approach to multi-criteria modeling for selecting alternative solutions to a large-scale engineering project. The specific problem investigated in their study using a fuzzy multi-criteria model based upon socio-economic factors. Four evaluation criteria were considered for the purpose of ranking the possible site based on initial assessment of community attitudes obtained from a non-scientific sampling of fifteen key informants. The criteria identified by the study were: labor supply in the impact area, relative economic need in the impact area, supply of key public services, and benefits versus

cost. Weights for each criterion were assigned according to the relative importance of the criteria by the decision-makers. However, the authors recommended the use of Analytic Hierarchy Process (AHP) proposed by Saaty for assigning weights to the criteria.

Generally, the practical application of fuzzy set theory can be difficult because of coding the relationships and the quantification of membership sets and fuzzy relationship becomes a much more intricate and ad hoc process (27). The more fuzzy logic you have the more difficult it is to implement. Additionally, it requires that the decision-makers express their choices in precise quantitative terms that most decision-makers are not ready for.

Others used the multi attribute utility function as a decision making tool. Romero (1996), developed a Multi-criteria Decision-Making Model that dealt with environmental economics. His methodology was underpinned by Compromise Programming together with optimization of the utility function. In his study, two cases were presented. These were the reconciliation between economic, environmental and recreational objectives inherent to the management of an environmental asset such as a forestry system and its application to the appraisal of environmental improvements or damage when non-monetary objectives are involved. This study used the utility theory, which is based on derived equations that represent the utility of a given property. Utility assessment begins by assigning the worst outcome a utility of 0 and the best outcome a utility of 1. Any other outcomes will have a utility value between 0 and 1. These utility values are then assessed using the indifference approach. This technique requires the decision-maker to assess an outcome that will make him indifferent between this outcome and a 50-50 gamble of two other outcome that have a utility value.



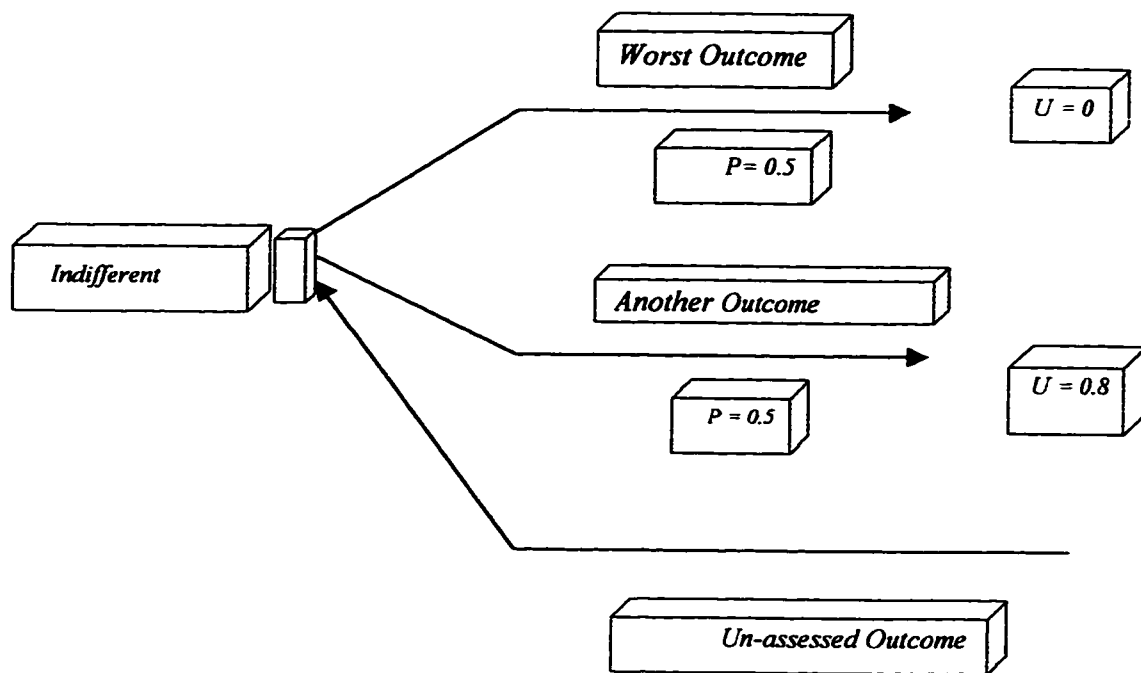


Figure 2.3 - Utility Function

From the diagram the un-assessed outcome becomes as follows:

$$U(\text{un-assessed outcome}) = (0.5) (\text{Utility of the worst outcome}) + (0.5) (\text{utility of other outcome}) = 0.5(0) + (0.5)(0.8) = 0.4$$

If you are truly indifferent between the utility of the un-assessed outcome and the assessed outcome, then the utility of the un-assessed outcome must be equal to the expected utility of a 50-50 gamble of the two assessed outcome.

The major problem with the utility function is that it is difficult to assign and determine the weight of each attribute. Sometimes decision-making is based on subjective criteria, which can not be quantified in the utility function.

Chandrasekaran and Ramesh, (5), in their article entitled, Microcomputer Based Multiple Criteria Decision Support System for Strategic Planning, developed a Multiple Criteria Decision Making Model (MCDM) for marketing two products by eight firms competing in two geographical areas. Four criteria were considered in their model. These were marketing, production, finance and material planning. The decision situation was to maximize product market share, net income and share prices. The constraint in their study related to capacity of plant, financial resources, product price ceiling, minimum volume requirements level constraints. Their study dealt with a decision-making situation where the objectives had to be simultaneously maximized subject to several constraints. Such an approach which is different than the approach of this thesis, which concentrate on the Goal Programming (GP) method.

GP provides an optimal solution for dealing with a multi-criteria decision-making problem. The procedure used to formulate the GP model starts with specifying a target for each objective, thus transforming all objectives into goals. There are three major steps in formulating a linear programming problem:

- 1. Identification of solution variables*
- 2. Development of objective function*
- 3. Determination of system constraints.*

Although GP incorporates multiple objectives and arrives at an optimal solution, its major drawback is that the decision-maker must specify goals and priorities, (28). Additionally, GP lacks a systematic approach to set priorities and trade-off among objectives. This shortcoming is more obvious when the tangible and intangible criteria need to be considered and many people are involved in the decision making process.

Grandzol and Gershon in their study entitled Multiple Criteria Decision-Making, G & G reposed alternatives to the machines used by the Department of Defense (DOD) Navy base in Pennsylvania. Criteria were developed for evaluating the alternatives and the team based on their experience assigned weights and the alternatives were ranked. In comparing alternatives, the team used the Electra technique, which compares a pair of alternative actions and ranks them by weighted scores for criteria for which a given alternative action is better (concordance) and scaled scores for criteria for which the alternative action is worse (discordance). Alternative actions that are better in the weighted criterion and not too much worse in the other criteria rank highest. The study team decided on 0.8 level of concordance and a 0.2 level of discordance for alternative action to qualify. The formulas for concordance and discordance calculations follows:

Concordance of two alternative action i and j:

$$C(i,j) = \frac{\text{Sum of weights for criteria where } i > j}{\text{Total sum of weights}}$$

Discordance of two alternative action i and j:

$$D(i,j) = \frac{\text{Maximum interval where } i > j}{\text{Total range of scale}}$$

In this study, forming decision based on their experience the study team assigned the weights and alternatives were then ranked by the use of the above equations.

Other studies were found in the literature that applied the analytic hierarchy process (AHP) for alternative selection in areas other than construction. A study by Albyarakoglu, (26), presented an AHP model for justifying new manufacturing technologies. In his study A classified manufacturing technologies and presented the strategies aspects of the problem of justifying a new manufacturing system. In

his model, environmental, organizational, and technological factors were incorporated within the strategic framework. The output of the model was a manufacturing technology that should be implemented given these factors. Using Expert Choice (EC) software, version 8, he carried out the application of his model.

In construction, the AHP was applied in the areas of project assessment and bidding decisions. A study by Mustafa and Al-Bahar (1991), (30), in which they applied AHP in the assessment of the risk involved in constructing the Jamuna multipurpose bridge in Bangladesh.

Abdelrazig (1996), (31), presented a structured methodology to help contractors in Saudi Arabia to make their bid/no-bid decisions by using AHP. The Computer software Expert Choice based on the AHP and the bid / no-bid decision was used to develop and solve the bid/no-bid decision model.

In the area of project there are also studies which deal with alternative selection using the AHP. A study by Mitta (1993), (27), applied the AHP to rank five computer interface systems on the basis of the user's perceptions: usability and learnability. Hanratty and Joseph (1992), (19), demonstrated the use of AHP for solving the problem of a chemical laboratory reactor selection. AHP was applied to select one of many alternatives to the reactor configurations.

Reza and Yvon (1988), (21), developed an integrated approach for the selection and evaluation of projects by using AHP to set priorities and trade-off among objectives, the Delphi technique to determine the objectives and their aspiration levels, and Goal Programming (GP) to evaluate the different alternatives.

## **CHAPTER THREE**

### **THE ANALYTIC HIERARCHY PROCESS (AHP)**

#### **3.1 INTRODUCTION**

The decision-making approaches that have been discussed in the previous chapter have their own shortcomings that can be alleviated by the AHP. Under the utility function, it is difficult to assign and estimate the weights of each attribute. Sometimes the decision making is based on subjective criteria, which cannot be quantified in the utility function. Goal programming lacks a systematic approach to set priorities and trade-offs among objectives. Fuzzy set theory is difficult to implement. Additionally, it requires that the decision-makers express their choices in precise and quantitative form that most decision-makers are not ready for.

To overcome those shortcomings, the AHP is recommended as a viable decision making tool. It will be presented as such and used in this study. The AHP is a robust and flexible multi-criterion decision-making tool used for prioritizing alternatives associated with a system and determining trade-off among them. Hierarchical structure models the system of interest and an intermediate objective is to determine the influence that the alternatives in one level in the hierarchy exert on the next higher level, (27).

Saaty developed the Analytic Hierarchy Process (AHP) in 1977 and 1986. It aids in the decision-making analysis and it is designed to solve complex problems involving multiple criteria. It has been used in the analysis of decisions involving both tangible and intangible criteria to rank alternatives on the basis of cost, benefit and risk. It has been applied in many areas where it was used to solve highly complex and elusive decision making problems. These areas include economics and

planning, energy policies, health, conflict resolution, arms control, material handling and purchasing, manpower selection and performance measurements, marketing, consulting and other areas, (25). All these areas share one problem, which is a decision making problem, which has to do with rating decision alternatives, selection or prediction.

The decision making process in the AHP context requires the decision-maker to provide judgments about the relative importance of each criterion and then specify a preference for each decision alternative on each criterion. The output of the AHP is a prioritized ranking indicating the overall preference for each of the decision alternatives.

A decision hierarchy in the AHP context is a linear structure, which represents the decision elements and their relationships and influence.


In summary the whole decision making process involves, criteria, sub-criteria and alternatives. The sub-criteria could be at more than one level depending on the complexity of the decision problem.

## **3.2 THE AHP STEPS**

The AHP involves four steps. These are:

1. Constructing a decision hierarchy by breaking down the decision problem into a hierarchy of inter-related elements.
2. Performing pairwise comparisons of the decision elements.
3. Estimating the weights of the decision elements by using eigenvalue method.
4. Aggregating the relative weights of the decision elements to Provide a set of ratings for the decision alternatives.

The first step involves the formulation of the decision problem in a hierarchical structure. A decision problem is broken into a hierarchy of interrelated decision elements. Figure three (3), illustrates such a hierarchy.

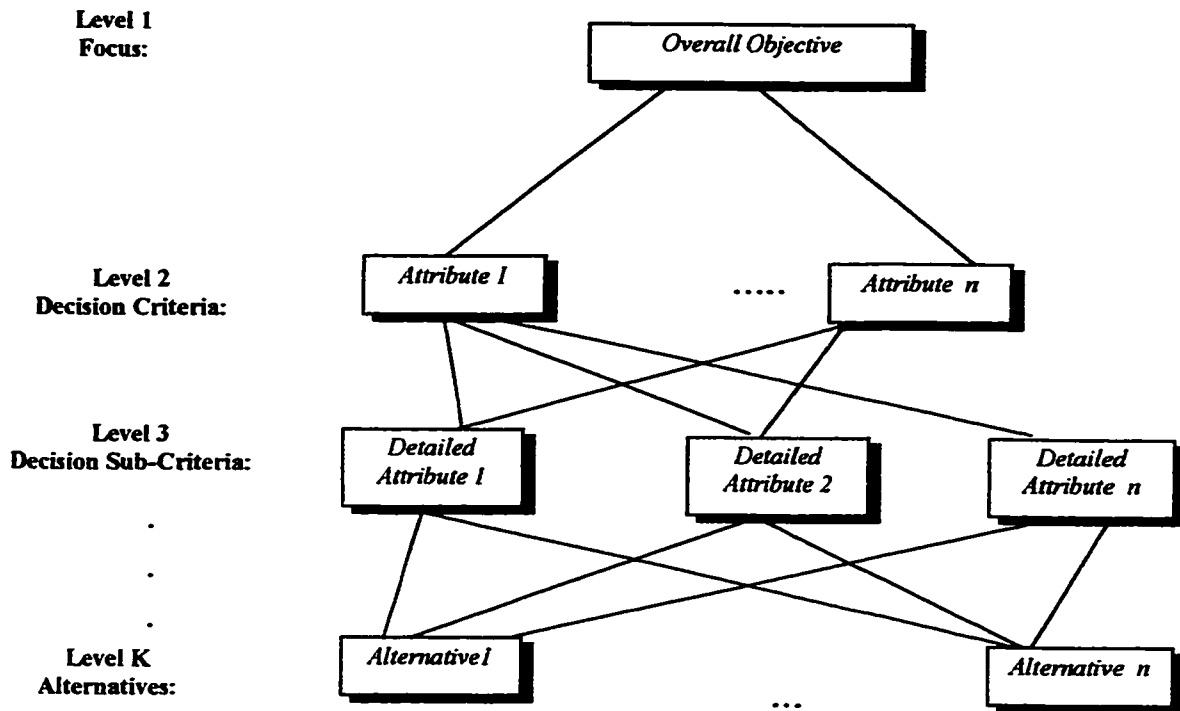

**Figure 3.1:** *Standard Hierarchical Structure*

At the top of the hierarchy lies the most general objective of the problem, such as the objective of making the best decision or selecting the best alternative.

The number of levels depends on the complexity of the problem and on the degree of detail. Each level of the hierarchy contains attributes or objectives that influence the decision. Details of the attributes increase at hierarchy. The last level of the hierarchy contains alternatives or selection choices.

Nodes in the hierarchy represent main criteria that may have sub-criteria or decision alternatives in the immediate lower level to be prioritized. Lines between any two levels reflect the relationship between the decision elements.

Each relationship is weighted according to the strength of influence an alternative or criterion at the same level, let us say  $K$  exerts on an alternative or criterion at level  $k-1$ , where  $K = 1, 2, 3, \dots, N-1, N$ . The more general, risky and uncertain the decision elements, the higher the levels are. The elements in each level are influenced or controlled by the elements in the level immediately above.

Influence is distributed downwards from the top, which is the main objective. The main objective has the greatest influence with a value of one. This value is divided among the decision elements of the second level and the values of each level down below down to the level of alternatives, the last level in the hierarchy.

The degree of influence is measured on a nine-point scale and the final solution results in the assignment of weights to the alternatives located at the lowest hierarchical level (level  $K$ ). These weights prioritize the alternatives according to a ratio scale.

The 1 to 9 scales is used as follows:

1. *One (1) for equal importance of the two evaluated elements.*
2. *Three (3) for moderate importance of one element over the Other.*
3. *Five (5) for strong importance of one element over the other.*
4. *Seven (7) for very strong importance of one element over the Other.*



5. *Nine (9) for extreme importance of one element over the other.*
6. *2, 4,6,8 for compromise.*
7. *Reciprocals for the inverse comparison.*

The second step involves the pairwise comparison of the decision elements for each group headed by a main criterion (node). The comparison is done in pairs and placed in matrix **A** of the following form; this is what we refer to as the pairwise comparison. Pair wise comparisons are fundamental building blocks of the AHP.

$$A = \begin{bmatrix} 1 & a_{12} & \dots & a_{1n} \\ 1/a_{12} & 1 & \dots & a_{2n} \\ \vdots & \vdots & \ddots & \vdots \\ 1/a_{1n} & 1/a_{2n} & \dots & 1 \end{bmatrix}$$

Each  $a_{ij}$  entry of **A** reflects the factor by which alternative  $i$  dominates alternative  $j$  as follows:

1.  $a_{ij} = 1/a_{ji}$ , for  $a_{ij} \neq 0$
2.  $a_{ii} = 1$ , for  $i = j$  and  $i, j = 1, 2, \dots, n$ .

Thus **A** is a reciprocal matrix. The evaluator has the option of expressing preferences as mentioned above, between the two as equally preferred, weakly preferred, strongly preferred, or absolutely preferred, which would be translated into pairwise weights of 1,3,5,7 and 9, respectively, with 2,4,6 and 8 as intermediate values.

In the 3<sup>rd</sup> step the eigen value method is used to estimate the relative weights of the decision elements.

If the judgment of the evaluator is perfect in each comparison,  $a_{ik} = a_{ij}a_{jk}$  for all values of  $i, j, k$  and  $A$  is referred to as a consistency matrix. The principal eigenvalue of  $A$  is used to measure judgment consistency. The principal eigenvector of  $A$  is the ratio scale defining these weights and is defined as:

$$\mathbf{w} = [w_1 \ w_2 \dots w_n]^T$$

and it is the vector of actual relative weights. In order to determine  $\mathbf{w}$ , the following equations must be satisfied:

$$A \cdot \mathbf{w} = \lambda_{\max} \mathbf{w}, \quad (1)$$

Where  $A$  is the observed matrix of pairwise comparison,  $\lambda_{\max}$  is the principal eigenvalue of  $A$ ;  $\mathbf{w}$  is its right eigenvector.

Perfect consistency is very difficult to achieve and some inconsistency is expected to exist in every pairwise comparison. To handle this, the AHP provides a method for measuring the degree of consistency among the pairwise comparisons (judgments) provided by the decision-maker. If the degree of consistency is acceptable, the decision process can continue. If it is not acceptable, the decision-maker should revise the pairwise comparison judgment. A consistency ratio of 0.10 or less is considered to indicate a reasonable level of consistency in the pairwise comparison.

In equation (1), the closer the value of  $\lambda_{\max}$  is to  $n$ , the more consistent are the observed values of  $A$ . Thus the algebraic difference between  $\lambda_{\max}$  and  $n$  is a measure of consistency. Saaty (1980) suggests the following consistency index:

$$C.I = \frac{\lambda_{\max} - n}{n - 1} \quad (2)$$

and the following consistency ratio (CR):

$$CR = (CI / ACI) * 100, \quad (3)$$

where ACI is the average index of randomly generated weights (Saaty 1980). A CR value of 10% or less is acceptable. Otherwise, it is recommended that A be re-observed to resolve inconsistency in pairwise comparison.

In the last step of the AHP, the relative weights of various levels are aggregated. The results produce a vector of composite weights, which will serve as a ranking of the decision alternatives. The composite relative weight vector of elements at kth level with respect to that of the first level may be computed by:

$$C [1,K] = \prod_{i=2}^k B_i, \quad (4)$$

Where  $C [1,k]$  is the vector of composite weights of element at level k with respect to the element on level 1, and  $B_i$  is the  $n_{i-1}$  by  $n_i$  matrix with rows consisting of estimating  $W$  vectors.  $n_i$  represents the number of elements at level i.

### 3.3 MATHEMATICAL EXPLANATION OF THE METHOD

Assume that we have  $n$  alternatives or factors that influence certain decision, let  $F_1, F_2, \dots, F_n$  be the set of factors. The quantified judgement on pairs of factors  $F_i, F_j$  are represented by an  $n$  - by -  $n$  matrix. Let's call it  $A$  matrix.

$$A = (a_{ij}), (i, j = 1, 2, \dots, n)$$

The entries  $a_{ij}$  are defined by the following:

1. If  $a_{ij} = x$  then  $a_{ji} = 1/x, x \neq 0$
2. If  $F_i$  is judged to be of equal relative importance as  $F_j$  then

$$a_{ij} = 1, a_{ji} = 1, \text{ in particular, } a_{ii} = 1 \text{ for all } i.$$

Thus  $A$  is a reciprocal Matrix. The matrix  $A$  has the following form:

$$A = \begin{bmatrix} 1 & a_{12} & \dots & a_{1n} \\ 1/a_{12} & 1 & \dots & a_{2n} \\ \dots & \dots & \dots & \dots \\ 1/a_{1n} & 1/a_{2n} & \dots & 1 \end{bmatrix}$$

After recording the quantified judgements on pairs  $(F_i, F_j)$  as numerical entries  $a_{ij}$  in Matrix  $A$ , now it is time to assign weights  $W_1, W_2, \dots, W_n$  to reflect the recorded judgements.

These weights should reflect quantified judgements of the group. We would then like to know how the weights  $(W_i)$  relate to the judgements  $a_{ij}$ . This can be explained in the following three steps:

**STEP 1:** Assume the judgements are precise measurements:

Let us say for  $F_1 = 8, F_2 = 4$   $F_1 / F_2 = 2$ . The judgement would be  $F_1$  is twice  $F_2$ . In other words,  $F_1$  is twice as important as  $F_2$ . Then  $a_{12}$  is recorded as 2. Thus in the ideal case, the relation between  $W_i$  and the judgements  $a_{ij}$  is given by:

$$w_i / w_j = a_{ij} \text{ (for } i, j = 1, 2, \dots, n) \quad (1) \quad \text{and}$$

$$A = \begin{bmatrix} w_1/w_1 & w_1/w_2 & \dots & w_1/w_n \\ w_2/w_1 & w_2/w_2 & \dots & w_2/w_n \\ \vdots & \vdots & \ddots & \vdots \\ w_n/w_1 & w_n/w_2 & \dots & w_n/w_n \end{bmatrix}$$

**STEP 2:** In order to make allowances for the judgements, consider the following:

The entries of the  $i^{\text{th}}$  row in a Matrix  $a_{ij}$  are:

$$a_{i1}, a_{i2}, \dots, a_{ij}, \dots, a_{in}$$

In the ideal case, these values are the same as the ratios:

$$\frac{W_i}{W_1}, \frac{W_i}{W_2}, \dots, \frac{W_i}{W_j}, \dots, \frac{W_i}{W_n}$$

In the ideal case, if we multiply the first entry by  $w_1$  and the second entry by  $w_2$ , and so on, we would obtain:

$$\begin{aligned} (w_i / w_1) \cdot w_1 &= w_i, \quad (w_i / w_2) \cdot w_2 = w_i, \\ &\dots, (w_i / w_n) \cdot w_n = w_i \end{aligned}$$

The result is a row of identical entries:  $w_i, w_i, \dots, w_i$

While in the general case, the row entries would represent values scattering around  $w_i$ . In that case we should equal the average of these values.

The more realistic relations for the general case would be:

$$\frac{a_{i1}w_1 + a_{i2}w_2 + \dots + a_{in}w_n}{n} = w_i \quad \text{or}$$

$$w_i = 1/n \sum_{j=1}^n a_{ij} w_j \quad (i = 1, 2, \dots, n) \quad (2)$$

This equation represents a substantial relaxation of the more stringent relation of equation (1), but we need to know whether this relaxation is sufficient to ensure a solution.

**STEP 3:** To answer the question, it is imperative to express equation (2) in another form:

As  $a_{ij}$  changes, it turns out that there would be a corresponding solution of (2) (i.e.,  $w_i$  and  $w_j$  can change to accommodate this change in  $a_{ij}$  from the ideal case). If  $n$  were also to change. We would denote this value  $n$  by  $\lambda_{\max}$ .

Thus the problem becomes:

$$w_i = \frac{1}{\lambda_{\max}} \sum_{j=1}^n a_{ij} w_j \quad i = 1, 2, \dots, n$$

This equation has a solution that turns out to be unique. Deviation in the  $a_{ij}$  can lead to a large deviation both in  $\lambda_{\max}$  and  $w_i$ . We start the problem with the model of the AHP,  $Aw = \lambda_{\max}w$ . Consider  $A$  as a reciprocal matrix, where  $\lambda_{\max}$  is the largest eigenvalue of  $A$ . Then solve for  $w$  in the left-hand side of the equation.

### 3.4 CONSISTENCY

If we have a comparison of  $a_{ij}$ , then the  $a_{ji} = 1/a_{ij}$ , then the matrix  $A$  is called the reciprocal matrix. If our judgement is perfect in all comparisons, then  $a_{ik} = a_{ij} \cdot a_{jk}$  for all  $i, j, k$ , and we call the Matrix  $A$  consistent.

When it is consistent, the weight is known and this can be shown as follows:

$$a_{ij} = W_i / W_j \quad i, j = 1, 2, \dots, n \quad (1) \quad \text{and then}$$

$$a_{ij} \cdot a_{jk} = (w_i/w_j) \cdot (w_j/w_k) = w_i/w_k = a_{ik}$$

also

$$a_{ij} = w_j / w_i = 1 / (w_i / w_j) = 1 / a_{ji}$$

and we have the matrix equation as follows:

$$A \cdot X = Y$$

Where  $X = (X_1, X_2, \dots, X_n)$  and  $Y = (Y_1, Y_2, \dots, Y_n)$

$$\sum_{j=1}^n a_{ij} X_j = Y_i \quad i = 1, 2, \dots, n$$

from equation (1) we obtain:

$$a_{ij} \cdot w_j / w_i = 1 \quad i, j = 1, 2, \dots, n$$

and then:

$$a_{ij} \cdot (w_j / w_i) = 1 \quad i, j = 1, 2, \dots, n$$

$$\sum_{j=1}^n a_{ij} w_j / w_i = n$$

or

$$\sum_{j=1}^n a_{ij} w_j = n w_i \quad i = 1, 2, \dots, n$$

which is equivalent to :  $AW = nW$  (2)

In the matrix theory, this formula expresses the fact that  $W_i$  is an eigenvector of  $A$  with the eigenvalue  $n$ .

$$A = \begin{matrix} & \begin{matrix} A1 & A2 & \dots & A \end{matrix} \\ \begin{matrix} A1 \\ A2 \\ \vdots \\ A_n \end{matrix} & \begin{bmatrix} w_1/w_1 & w_1/w_2 & \dots & w_1/w_n \\ w_2/w_1 & w_2/w_2 & \dots & w_n/w_n \\ \dots & \dots & \dots & \dots \\ w_n/w_1 & w_n/w_2 & \dots & w_n \end{bmatrix} \end{matrix} \begin{bmatrix} w_1 \\ w_2 \\ \vdots \\ w_n \end{bmatrix} = n \begin{bmatrix} w_1 \\ w_2 \\ \vdots \\ w_n \end{bmatrix}$$

Any matrix with only one column or one row is called a column vector or a row vector respectively.

In an other case, when the  $a_{ij}$  is not based on exact measurements, (which is immediately the practical way and a subjective judgement) it will deviate from the “ideal” ratios  $w_i / w_j$  and therefore equation (2) will no longer hold.

In the matrix theory, if  $\lambda_1, \lambda_2, \dots, \lambda_n$  are the numbers satisfying the following equation:

$$AX = \lambda X$$

Where  $A$  is the  $n$  matrix and  $X$  is a column vector, i. e. they are the eigen value ( or characteristic values) of  $A$ , and if  $a_{ii} = 1$  for all  $i$ , then

$$\sum_{i=1}^n \lambda_i = n$$



If equation (2) holds, then all eigen values are zero, except for  $\mathbf{n}$ , (which means inconsistent case) , where  $\mathbf{n}$  is the largest eigen value of  $\mathbf{A}$ .

If the entries  $a_{ij}$  of a positive reciprocal Matrix  $\mathbf{A}$  change by small amounts, then the eigen values change by small amounts.

Combining these two results we find that if the diagonal of a Matrix  $\mathbf{A}$  consists of the value 1 ( $a_{ii} = 1$ ) and if  $\mathbf{A}$  is consistent, then small variations of the  $a_{ij}$  keep the largest eigen value,  $\lambda_{\max}$  close to  $\mathbf{n}$  and the remaining eigen values close to zero.

Therefore, our problem is this: if  $\mathbf{A}$  is the matrix of pairwise comparison values, in order to find the priority vector, we must find the vector  $\mathbf{W}$  which satisfies the following:

$$\mathbf{A}\mathbf{w} = \lambda_{\max} \mathbf{W}$$

Since it is desirable to have a normalized solution, we alter  $\mathbf{W}$  slightly by setting:

$$\varnothing = \sum_{i=1}^n w_i$$

and replacing  $w$  by  $(1/\varnothing) w$ . This ensures uniqueness and results in (the equation):

$$\sum_{i=1}^n w_i = 1$$

Since small changes in  $a_{ij}$  imply a small change in  $\lambda_{\max}$ , the deviation of the latter from  $\mathbf{n}$  is a measure of consistency.

Thus:

$$\frac{\lambda_{\max} - \mathbf{n}}{\mathbf{n} - 1}$$

We take it as our own consistency index, as our indicator of “the closeness to consistency”. In general if this number is  $< 0.1$ , we may be satisfied with our judgement.

### **3.5 PRIORITIZATION**

The AHP sometimes is difficult to deal with when certain members of a decision making team have political favors and/or a hidden agenda. In such as state, group interaction and cooperation would be difficult. However, the AHP is a powerful tool for those who want to assess their own and their opponents' strategies.

In a cooperative undertaking, the process moves faster when the participants have the following in common:

- (1) Shared goals
- (2) Intimate long term contact
- (3) Social acceptance of each other in the workplace
- (4) Equal status when participating

### **3.6 DECOMPOSITION AND AGGREGATION OR CLUSTERING**

It is to break things down into large groupings or cluster and then break each of these into smaller clusters and so on.

A useful way to deal with a larger number of elements which fall in a level of a hierarchy is to group them into clusters according to their relative importance. Thus, one would have one cluster of the most important (most similar or closest) elements, another of those of moderate importance, and another of those of low importance.

Saaty proved from theory that the elements to be compared should not exceed seven. Let us assume that we have a set of  $n$  elements. Comparing them in pairs we would then have  $(n^2 - n)/2$  judgements. Suppose now as an example (cited in Saaty) that we have 98 elements. Then we have to have

$$\frac{98^2 - 98}{2} = 4,753 \text{ judgements or comparisons.}$$

On the other hand, if we divide them into seven (7) clusters of 14 elements each, then do comparisons of seven clusters we need

$$\frac{7^2 - 7}{2} = 21 \quad \text{comparisons}$$

Each cluster can now be divided into two (2) clusters each with seven elements two clusters falling under each of the 14 elements may be compared. Clusters require one comparison, but there are seven of them Hence, we require 7 comparisons on this level and then  $14 \times 21 = 294$  comparisons on the lowest level.

The total number of comparisons in the hierarchical decomposition is  $21 + 7 + 294 = 322$  comparisons as compared to 4,753 comparisons without clustering.

Clustering has two advantages:

1. Great efficiency in making pairwise comparisons.
2. Greater consistency under the assumption of a limited capacity of mind to compare more than  $7 \pm 2$  elements simultaneously.

### 3.7 AHP CALCULATION STEPS

Suppose we have an objective, we begin by writing an  $n \times n$  matrix (pairwise comparison matrix)  $A$ . The entry in row  $i$  and column  $j$  of  $A$ , called  $a_{ij}$ , indicates how much more important objective  $i$  is than objective  $j$ . Importance is to be measured on an integer - valued 1-9 scale.

Satty pointed out in his book that the upper limit of 9 in the scale is reasonable due to several reasons, one of which is:

That the psychological limit of  $7 \pm 2$  items in a simultaneous comparison suggests that if we take  $7 \pm 2$  items and if they are all slightly different from each other, we would take 9 points to distinguish these differences. (G. A. Miller, 1956)

To approximate  $W_{\max}$ , we use the following steps:

Step 1: For each of  $A$ 's columns, do the following. Divide each entry in column  $i$  of  $A$  by the sum of the entries in column  $i$ . This yields a new matrix, normalized matrix  $A_{\text{norm}}$  in which the sum of the entries in each column is 1.

Step 2: To find an approximation to  $W_{\max}$  to be used as our estimate of  $W$ , we proceed by estimating the average of the entries in row  $i$  of  $A_{\text{norm}}$ . This yields the weights of each objective.

#### Checking for Consistency

1. Compute  $AW^T$ . Where  $A$  is a pairwise comparison matrix,  $W^T$  is the transpose weight matrix obtained in Step 2 above.

2. Compute:

$$\frac{1}{n} \sum_{i=1}^n \frac{\text{i}^{\text{th}} \text{ entry in } Aw^T}{\text{i}^{\text{th}} \text{ entry in } w^T}$$

to get  $\lambda_{\max}$ , the principal eigenvalue.

3. Compute the Consistency Index (CI)

$$CI = \frac{\lambda_{\max} - n}{n-1}$$

4. Compare CI to the Random Index (RI) for the appropriate value  $n$   
Shown in Table 2.

For a perfectly consistent decision-maker,  $i^{\text{th}}$  entry in  $AW^T = n$  ( $i^{\text{th}}$  entry of  $W^T$ ).  
This implies that a perfectly consistent decision-maker has  $CI = 0$ .

If  $\frac{CI}{RI} < 0.1$ , the degree of consistency is satisfactory, but

if  $\frac{CI}{RI} > 0.10$ ,

serious inconsistency may exist, and the AHP may not yield meaningful results.

**Table 3.1: Random Index (Ri) Values**

<b>RID</b>	<b>RINDEX</b>
1	0
2	0.1
3	0.58
4	0.9
5	1.12
6	1.24
7	1.32
8	1.41
9	1.45
10	1.49
11	1.51
12	1.48
13	1.56
14	1.57
15	1.59

## CHAPTER FOUR

### DECISION CRITERIA FOR THE SELECTION OF PROJECTS ALTERNATIVES

#### 4.1 INTRODUCTION

The following criteria were obtained from the literature review, documentation of previously implemented telecommunications projects, a survey and informal interviews with the people who are responsible for conducting telecommunications projects. These criteria are based on a generic telecommunications system. There are other criteria that can be included, which are system specific. However, these criteria are common for every telecommunications system.

##### 4.1.1 Cost

These costs will be broken down as follows:

- *Initial Cost*
- *Operating And Maintenance Cost*
- *Replacement Cost*
- *System Upgrading Costs*
- *Leasing Cost*
- *Decommissioning Cost*

The cost criteria include all the costs associated with system installation, replacement, operation and maintenance. Initial cost is the cost associated with engineering, acquisition, and installation, commissioning, and operation of the system.

Operation cost includes the costs associated with the system ope, power consumption and HVAC usage.

Maintenance costs are the cost involved in maintaining the system including the preventive maintenance and repair cost.

Replacement cost is the cost associated with replacement of the components of the system and supporting systems such as the electrical system and HVAC.

System upgrading cost includes the costs that are required for upgrading the system for increasing the system capacity or upgrading the hardware or software of the system to ensure that it runs more efficiently.

Leasing cost involves the cost of leasing system components or space for housing the system equipment. For example, if a company use to lease fiber optic cable from the Ministry of Post Telephone & Telegraph (MoPTT), the company would provide only the terminal equipment.

Decommissioning cost is the cost that is incurred when the system is removed from service at the end of its life.

#### **4.1.2 Life**

The sub-factors are as follows:

- *Technological Life*
- *Working Life*
- *Economical Life*

The life of the implemented system includes the working, economical and technological life. Technological life is dependent on the life expectancy of a communications system based on anticipated vendor support. Some vendors discontinue manufacturing certain products after a limited number of years due



discontinue manufacturing certain products after a limited number of years due either to bankruptcy or the introduction of a new product that meets the demands at the at time. Due to rapid advances in telecommunications industry, communications systems become obsolete due to the lack of vendor support. The newer the technology is the greater the life expectancy and vice versa, (13).

Economical life is the period of time during which the system provides benefits. It relates time and benefits, (2).

Working life is the period of time during which the system is in operation. Some times a company may shut down a communications system. As an example temporary communications system installed to support a specific operation for a limited time.

#### **4.1.3 Ownership and Control**

This criterion considers the importance of ownership of the system and control, (13). The company may decide to lease the services from other entity, such as MoPTT, SCECO or any other government agency. The problem associated with this choice is the lack of system control by the company. If an outage happens somewhere in the system at certain time, repair might not take place immediately because the leasing entity has assigned it a low priority rating. As a result of this, the company may incur a great deal of loss of revenue due to the lack of production of oil and gas.

#### **4.1.4 Technology**

Technology compares new systems with little operational history background to older systems with known established operational characteristics. It may include sub-factors such as Filed Proven technology, technology under research and development, and new technology that is still not yet used on a large scale, (13,22).

#### **4.1.5 System Features**

The system features include:

- *Mandatory Features*
- *Optional Features*

Each communications system offers a unique variety of features because of the characteristics of each system, (13). Mandatory features include the features that are essential for successful operation of the system and included in the customers' initial list of requirements. Optional features are redundant, not part of the customer requirements. The vendor usually offers these features in the proposed systems.

#### **4.1.6 Ease of Migration**

This is a measure of system flexibility which provides the ability to transfer from one frequency band to other in the case of radio equipment, or the ability to transfer to future system developments without the need of replacing the system. Stated differently, it is the responsiveness of the system to future changing needs. It includes system capacity, conformance to new standards and protocols and the upgradability of the system, (13,22).

Sub-criteria may include system modularity or system software upgrade. System modularity is the addition of the system modules or subsystem when an expansion or modification is required without the need for changing the existing system components. Software upgrade is the addition to the system software to upgrade the system to meet the future demands or changes which may be incorporated without the changing or altering the system components.

#### **4.1.7 Protection during Failures**

The ability of the system to recover from failure. It basically includes the provisioning of the critical system components on a N+1 with automatic switchover in the event of failure.

#### **4.1.8 Compatibility**

The compatibility is the ability of the system to interface with the existing system and future systems. This includes the compliance of the system with internationally known standards and protocols. If the system complies with these standards and protocols then no problems will be encountered when interfacing with other systems that comply with these standards and protocols.

#### **4.1.9 Reliability**

The reliability of the system includes the Mean Time Between Failures (MTBF) and Mean Time to Repair (MTTR). MTBF is the time it takes the system to recover from failure. MTTR is the time it takes to repair the system after failure, (14,19,22). The less the MTTR or the MTBF is the more reliable the system is.

#### **4.1.10 Availability**

It is the time it takes the system to operate continuously without breakdown or it is the percentage of time the system meets performance requirements; unavailability is the percentage of time the system does not meet the requirements. Unavailability of the system usually occurs from equipment failure, power failure and supporting facilities failure, and may be due to weather, interference or human activities, (14,19,22, 27).

#### **4.1.11 System Security**

The security of the system includes the security of the system files and the security of the transmitted voice or data. How secure the system is? . Is it vulnerable to intruders, can it be accessed by unauthorized personnel?. Does it have Password Protection? Does it have multiple security levels with data and voice encryption for the users, (21).

#### **4.1.12 Equipment Dimension**

Dimension of the system equipment includes height, width and depth. Some equipment might not fit in the provided space available at certain communications sites. As a result of this difference, modification might be required to the communication site to accommodate the equipment or to the equipment to fit in the available space.

#### **4.1.13 Equipment Weight**

It is the nominal weight of the system equipment. The lighter the weight of the equipment the more desirable it is.

#### **4.1.14 Physical Configuration and Appearance**

This criterion considers whether the equipment is designed for in-door installation such as desktop or rack-mounted or out-door installation for post installation. The in-door desktop is similar to the computer or radio base station. Equipment could be mounted in a rack, cabinet or on the floor. The outdoor post-mounted equipment is similar to equipment that is used for oil and gas flow, such as Remote Terminal Units (RTUs). Obtaining/specifying equipment of this type will eliminate the need for new building with its supper facilities to house the equipment.

The appearance of equipment is concerned basically with color of the equipment. Sometimes this is so that it matches the color of the equipment already on the site.

#### **4.1.15 Climatic and Environmental Requirements**

Ambient operating temperature and relative humidity. The ambient temperature is the temperature that the system can operate under without affecting its performance. The relative humidity is the humidity the system can operate under without affecting its performance.

#### **4.1.16 Power Requirements**

The system should operate at a specified power either –48 VDC (nominal) or 120 VAC, 60 Hz or as specified. The system should be able to switch automatically to the backup power in the event of the main power failure. Sometimes solar energy is required instead of the conventional power.

#### **4.1.17 Heat Dissipation**

A measure for the equipment heat dissipation is BTU per Hours. The less heat the equipment dissipates the lower the requirements for HVAC to cool the equipment for in-door installation.

#### **4.1.18 Acceptance of the Project with Proposed System**

It includes satisfaction or acceptance of the proposed system by:

- *Owner (Operating Organization )*
- *Project Management Team (PMT)*
- *End-User*
- *Public*
- *Government*

Quite often, the end user or the operating organization may require a different system than the proposed system, due to certain constraints that the proposed one could not meet. These constraints may include political, budget or schedule factors.

#### **4.1.19 Permits**

The permits include:

- *Equipment importation Permits*
- *Land Use permit*

The equipment must be granted an import permit by the government before the user can use it. The import permits are difficult to get sometimes due to the limitation imposed on the company by the MoPTT. Often these permits are delayed which lead to delays in the delivery and installation of the equipment, especially, wireless communications equipment.

The land use permits are required when the system is installed in areas that do not belong to Saudi Aramco. This requires leasing, buying the land from others or applying for a land use permit when the government owns the land.

If these permits cannot be granted the project cannot be implemented or if they get delayed, then the project will be delayed.

#### **4.1.20 Waivers**

Occasionally, users have unique requirements that cannot be satisfied within Saudi Aramco Standards. In such a case, the user organization applies to the Consulting Services Department for a waiver. For example, an organization might ask for a waiver of the technical standards in order to employ a non-standard bandwidth

configuration of a microwave system, (22). If these waivers are not approved, the project can not be implemented.

#### **4.1.21 Vendor Support**

This criterion includes: the vendor's experience and reputation; the vendor's capability to support its products through warranties, on site maintenance, hot-line support, user training, consulting, and documentation; and the product pricing structure, (21).

#### **4.1.22 Time to Implement**

The time required to place the system in operation. The time might be affected by delays in approvals of waivers, import permits, land use permits or the completion of the construction of the supporting facilities.

#### **4.1.23 Equipment Safety**

This criterion is associated with the safety of the equipment. The evaluator needs to find out if the equipment is intrinsically safe. When it is confirmed that the equipment is intrinsically safe, it means that the equipment is approved to operate in areas in which hazardous concentrations of flammable gasses exist continuously, intermittently, or periodically as described in the National Electric Code-Class I-Division 1-Group D.

#### **4.1.24 Compliance**

This constitutes compliance of the system to the owner's standards as well as internationally known standards.

#### **4.1.25 Project Location**

This criterion specifies the location of the project. Generally, the project location could have a considerable impact on the economic growth of the area where the site will be located. For one reason or another, the owner or the operator of such a site would not agree on a particular location due to its remoteness or it was not considered to be a strategic location.



## CHAPTER FIVE

### SURVEY AND DATA ANALYSIS

A survey was conducted to determine the criteria that influence the decisions for telecommunication projects. To achieve this, thirty (30) questionnaires were distributed to selected professionals who play a major role in the decision making process for telecommunication projects. The purpose of the questionnaire was to collect data to identify the decision factors and to determine their overall importance in the decision making process. Appendix A includes information pertaining to the survey and the collected data.

The participants constitute a mixture of the engineers who deal with all aspects of communications systems, such as fiber optic systems, mobile radio systems, telephone and switching, satellite and microwave systems. They represent project management, communications and computer engineering and communications and computer services.

**Table 5.1 - Participants List**

<b>Organization</b>	<b>No. Of Quest.</b>	<b>No. Of Replies</b>
Consulting Service Department / Computer & Communications Group	2	0
Computer and Communications Engineering Division	5	3
Communications and Computer Services Division	5	3
Communications Projects Division	18	17
<b>Total</b>	<b>30</b>	<b>23</b>

The number of questionnaire that was sent to each organization was determined by the degree of involvement of each organization in the decision-making process. Only twenty-three (23) replied. This number of respondents constitutes about 77% of the questionnaires distributed.

The questionnaire started by asking the position of the participants and the extent of his involvement in the recommendation and decision making for selecting and/or recommending telecommunications projects or technologies.

Then each participant was asked to review the list of criteria and determine if the list was complete or if there was any criterion that needed to be added or deleted from the list. Each participant is asked to determine the influence of each factor on the overall decision by assigning a number that represented the influence on a scale of 1 to 9.

The next tables show the mean influence and the variance of the decision criteria that were resulted from the survey.

**Table 5.2 - Criteria and sub - criteria list with mean influence**

<b>Decision Criteria</b>	<b>Total</b>	<b>Mean Influence</b>	<b>Variance</b>	<b>Standard Deviation</b>
<b>1. Cost</b>				
Initial Cost	163	7.1	2.9	1.7
Operating And Maintenance Cost	149	6.5	4.1	2.0
Alteration And Replacement Costs	121	5.3	2.8	1.7
Leasing Cost	107	4.7	4.3	2.1
Decommissioning Cost	73	3.2	4.4	2.1
System upgrade cost	119	5.2	3.4	1.8
Composite Values -- Cost		5.3	3.6	1.6
<b>2. Project Location</b>	122	5.3	6.3	2.5
<b>3. Ownership and Control</b>	158	7.0	2.4	1.5
<b>4. Life</b>				
Technological Life	163	7.1	1.2	1.1
Working Life	155	6.7	1.7	1.3
Economical Life	164	7.1	1.5	1.2
Composite Values— Life		7.0	1.5	1.2
<b>5. Technology</b>	162	7.04	3.3	1.8
<b>6. Ease of Migration</b>	141	6.1	3.4	1.8
<b>7. System Features</b>				
Mandatory Features	173	7.5	3.8	3.8
Optional Features	92	4	3.6	2.0
Composite Values— Features		5.8	3.7	2.9
<b>8. Ease Of Protection During Failure</b>	154	6.7	3.6	1.9
<b>9. Compatibility</b>	171	7.4	3	1.7
<b>10. Reliability</b>	159	6.9	1.6	1.3
<b>11. Availability</b>	166	7.2	2.7	1.6
<b>12. System Security</b>	130	5.6	3.4	1.8
<b>13. Equipment Dimension</b>	87	3.8	3.4	1.8

Table 5.2 - Criteria and sub - criteria list with mean influence – Continued

<b>Decision Criteria</b>	<b>Total</b>	<b>Mean Influence</b>	<b>Variance</b>	<b>Standard Deviation</b>
<b>14. Equipment Weight</b>	75	3.3	3.5	1.9
<b>15. Physical Configuration</b>	75	3.3	2.7	1.6
<b>16. Climatic and Environment Req.</b>	123	5.3	4.5	2.1
<b>17. Power Requirements</b>	110	4.8	3.0	1.7
<b>18. Heat Dissipation</b>	111	4.8	4.4	2.1
<b>19. Acceptance</b>				
By Owner (Operating Organization )	176	7.7	1.8	1.3
By Project Manag. Team(PMT),	153	6.7	2.0	1.4
By End-User	142	6.2	5.5	2.3
By Government	133	5.8	8.5	2.9
By Public	99	4.3	6.3	2.5
Composite Values — Acceptance		6.1	4.8	2.1
<b>20. Permits</b>				
Equip. Importation Permits	131	5.7	6.2	2.5
Land Use permit	137	6.0	8.7	3.0
Composite Values — Permits		5.8	7.5	2.8
<b>21. Vendor Support</b>				
Warranties	147	6.4	3.6	1.9
On-Site Maintenance	137	6.0	6.1	2.5
Consulting	120	5.2	4.1	2.0
Documentation	149	6.5	4.1	2.0
Hot-Line Support	100	4.3	3.5	1.9
User Training	147	6.4	4.7	2.2
Composite Values — Vendor Support		5.8	4.4	2.1

**Table 5.2 - Criteria and sub - criteria list with mean influence – Continued**

<b>Decision Criteria</b>	<b>Total</b>	<b>Mean Influence</b>	<b>Variance</b>	<b>Standard Deviation</b>
<b>22. Waivers</b>	140	6.1	2.2	1.5
<b>23. Time to implement</b>	150	6.5	2.3	1.5
<b>24. Intrinsic Safety</b>	170	7.4	2.3	1.5
<b>25. Compliance</b>				
Owner Standards	160	7.0	2.4	1.5
International Standards	152	6.6	2.8	1.7
ITU	162	7.0	2.7	1.6
<b>Composite Values — Compliance</b>		6.9	2.6	1.6

Table 5.3 - Main Criteria Influence

	<b>Decision Criteria</b>	<b>Mean Influence</b>	<b>Variance</b>	<b>Standard Deviation</b>
1	Cost	5.3	3.6	1.6
2	Project location	5.3	6.3	2.5
3	Ownership and control	7.0	2.4	1.5
4	Life	7.0	1.5	1.2
5	Technology	7.0	3.3	1.8
6	Ease of Migration	6.1	3.4	1.8
7	Systems Features	5.8	3.7	2.9
8	Ease of Protection During Failure	6.7	3.6	1.9
9	Compatibility	7.4	3	1.7
10	Reliability	6.9	1.6	1.3
11	Availability	7.2	2.7	1.6
12	System Security	5.6	3.4	1.8
13	Equipment Dimension	3.8	3.4	1.8
14	Equipment Weight	3.3	3.5	1.9
15	Physical Configuration	3.3	2.7	1.6
16	Climatic and Environment Requirement	5.3	4.5	2.1
17	Power Requirement	4.8	3.0	1.7
18	Heat Dissipation	4.8	4.4	2.1
19	Acceptance	6.1	4.8	2.1
20	Permit	5.8	7.5	2.8
21	Vendor Support	5.8	4.4	2.1
22	Waivers	6.1	2.2	1.5
23	Time to Implement	6.5	2.3	1.5
24	Intrinsic Safety	7.4	2.3	1.5
25	Compliance	6.9	2.6	1.6

The next table presents the ranking of the criteria mean influence along with variance and standard deviation from highest to lowest. From the analysis, we find that the range of the mean is between 3 and 7. We find that none of the criteria is at the values of 8, 9, 1 or 2.

**Table 5.4 - Main Criteria Influence Ranked from Highest to Lowest.**

<b>Decision Criteria</b>	<b>Mean Influence</b>	<b>Variance</b>	<b>Standard Deviation</b>
9. Compatibility	7.4	3	1.7
24. Intrinsic Safety	7.4	2.3	1.5
11. Availability	7.2	2.7	1.6
10. Reliability	6.9	1.6	1.3
5. Technology	7.0	3.3	1.8
4. Life	7.0	1.5	1.2
3. Ownership and Control	6.9	2.4	1.5
25. Compliance	6.9	2.6	1.6
8. Ease Of Protection During Failure	6.7	3.6	1.9
7. System Features	6.5	3.7	2.9
23. Time to implement	6.5	2.3	1.5
6. Ease of Migration	6.1	3.4	1.8
22. Waivers	6.1	2.2	1.5
19. Acceptance	6.1	4.8	2.1
21. Vendor Support	5.8	4.4	2.1
20. Permits	5.8	7.5	2.8
12. System Security	5.6	3.4	1.8
1. Cost	5.3	3.6	1.6
16. Climatic and Environment Requirements	5.3	4.5	2.1
2. Project Location	5.3	6.3	2.5
18. Heat Dissipation	4.8	4.4	2.1
17. Power Requirements	4.8	3.0	1.7
13. Equipment Dimension	3.8	3.4	1.8
15. Physical Configuration	3.3	2.7	1.6
14. Equipment Weight	3.3	3.5	1.9



Although, some of the participants evaluated some of the criteria at 8, 9 or 1, the majority evaluated the criteria at a range of 3 to 7. This resulted in the overall result in the neighborhood of seven (7) at one extreme and three (3) at the other extreme. This shows a tendency of most of the participants to use a five-point scale disregarding the upper or lower limits. This may have to do with the participants' perception and habit of using a 5-point scale all the time; with outstanding being 5 and 1 being poor. This may represent the fact that scales for any evaluation do not exceed five points.

Additionally, the analysis shows that cost did not receive a high rating. This reflects the fact that, in Saudi ARAMCO, cost is not as important as other factors when implementing telecommunications projects because communications projects constitute a small portion of any oil and gas project. The emphasis of the company appears to be on the major carrying-cost items related to the oil and gas facility which may include vessels, booster pumps, gas compressors, anti-blast buildings and so forth. For example the author of this thesis has been assigned a telecommunications project that is part of a Gas & Oil Separation (GOSP) Project, where the estimated cost of the communications portion was only about 4% of the total cost of the plant.

Therefore, the management effort to save money will be concentrated on the major items that incur most of the cost. The communications system is essential to running the daily oil and gas production in this kind of environment. Communications can not be compromised, as far as the rapid advances and evolution of the electronics are concerned. On the other hand, advances in oil and gas related equipment is slow when compared to development in communications systems.

Also, it can be noted that the first six factors that were evaluated to be very strongly Important with rating ranging from 7 to 7.4, carry with them hidden costs.

The first factor is compatibility. If the system is not compatible then the company will have to replace the existing system in order for both systems to interface without any problem. Replacing the existing system will incur additional costs for buying the new system and for decommissioning the old system. Additionally, the life of the old system will be cut short, where it will not provide the benefits it was intended to provide.

The second factor, intrinsic safety, with a rating of 7.4, is as important as the compatibility. Safety is always first in our daily life. Safety cannot be compromised, especially when dealing with end user communications equipment in a plant area. This equipment should be safe to operate in areas with a high concentration of flammable gasses, where a small spark from a battery of equipment might cause major damage to the plant, thereby incurring large repair or replacement costs.

Availability and reliability come next in order with a 7.2 and 7.0 rating respectively. Availability is essential to insure the continuity of service. If it is jeopardized by the poor performance of the system, it will force the oil & gas production to lie idle, because every thing depends on communications. If the system is not reliable, it will affect availability and efficiency, thereby adversely affecting daily business. All of these effects will result in big loss of revenue, so this is a cost impact in the long run.

System life and technology come next in line with a rating of 7.0. If the company buys a system with a technology that is emerging or under research and development, then this technology will bring with it schedule risks and the possibility that it may not work as expected. This may result in additional cost due

to delays if the system does not work or arrives on the market after the expected date.

The next set of factors was evaluated with a rating ranging from, 6.1 to 6.9. The first two factors were ownership, control, and compliance. The first factor is related to cost. If the communications system is owned by some other entity whether it is a government or private agency, the system will not be on the priority list when it comes to maintenance or restoration of the system after failure. If the system is not maintained or restored in a timely manner, that will cause delays in oil production. This in turn incur a big loss of revenue. On other hand, if the company owns and controls the system, it will receive the required attention immediately.

The other factors in this range include ease of migration, system features, time, migration, waivers and acceptance. The acceptance factor includes sub-factors, one of which is the acceptance by government. If the government does not accept the project, the company can not implement the project.

Vendors support, permits, cost, climatic and environment requirements and project location with ratings ranging from 5.3 to 5.8 are next. If permits cannot be granted then the company cannot implement the project. If the vendor support is discontinued, the system needs to be replaced, which will result in additional cost for buying new system.

Heat dissipation and power requirements factors got 4.8 points, between strongly and weakly important. The last three factors are the lowest in the ranking and they can be dropped from the analysis.

The list of criteria can be broken into three groups. Project related factors, system related factors and vendor / manufacturer related factors.

After the data analysis had been done, another review of the factors was conducted with some of the participants and it was agreed that vendor criteria should be modified as shown below:

#### **Vendor Reputation**

1. Availability of technical literature
2. Responsiveness to customers
3. Consultation

#### **Vendor Support During Implementation**

1. Availability of technical expertise
2. Quality of engineering work
3. On site support for installation and commissioning

#### **Vendor Support After Commissioning**

1. Warranty
2. On site maintenance
3. Documentation
4. Hot line support
5. User training

The next tables show the final grouping of criteria for each group. The final grouping of the sub-criteria are shown in the decision hierarchy in figure 7.1.

Table 5.5 – Project Related Criteria

<b>Project-Related Criteria</b>
<b>Cost</b>
<b>Time to Implement</b>
<b>Ownership and Control</b>
<b>Project Location</b>
<b>Acceptance</b>
<b>Permits</b>

Table 5.6 – Vendor Related Criteria

<b>Vendor-Related Criteria</b>
<b>Vendor Reputation</b>
<b>Vendor Support During Implementation</b>
<b>Vendor Support After Commissioning</b>

Table 5.7 – System Related Criteria

System-Related Criteria
Operability
Mechanical Characteristics
Compliance
Life & Technology

## **CHAPTER SIX**

### **COMPUTERIZED DECISION MAKING MODEL**

#### **6.1 INTRODUCTION**

The computerized decision making model was created in visual basic. The program consists of six modules. These are:

1. Start Module
2. Initial Data Module
3. Criteria Pairwise Comparison Module
4. Initial Alternatives Data Module
5. Alternative Pairwise Comparison Module
6. Synthesis Module

All the input data and output data are saved automatically in a Microsoft Access file called Alirezam.mdb. The output data is plotted immediately after performing the pairwise comparison and obtaining the weights for the criteria. The consistency check is done every time the pairwise comparison is performed. The data must be entered in the initial data module and in the alternative initial data module and not in the Access files.

The program has the capability to retrieve the files from database via the pop-up menu. The print command prints the image of the sheet only. The following is a flow chart showing the basic steps of the program.

## **6.2 Program Limitations**

The program is limited to decision problems that have :


- Hierarchies of five (5) levels or less.
- Criteria groups with ten (10) sub-criteria or less.

There is no restriction on the number of alternatives, but it is recommended that the number of alternatives should not exceed more than ten (10) alternatives.

## **1.3 Flow Chart of the Program (Step by Step Calculation)**

The next figures show the step by step instructions. The program has mainly 12 steps. Once the program is loaded it initializes the output data files and then proceeds with the calculations after the user has input the data. The next section explains this process in full detail.




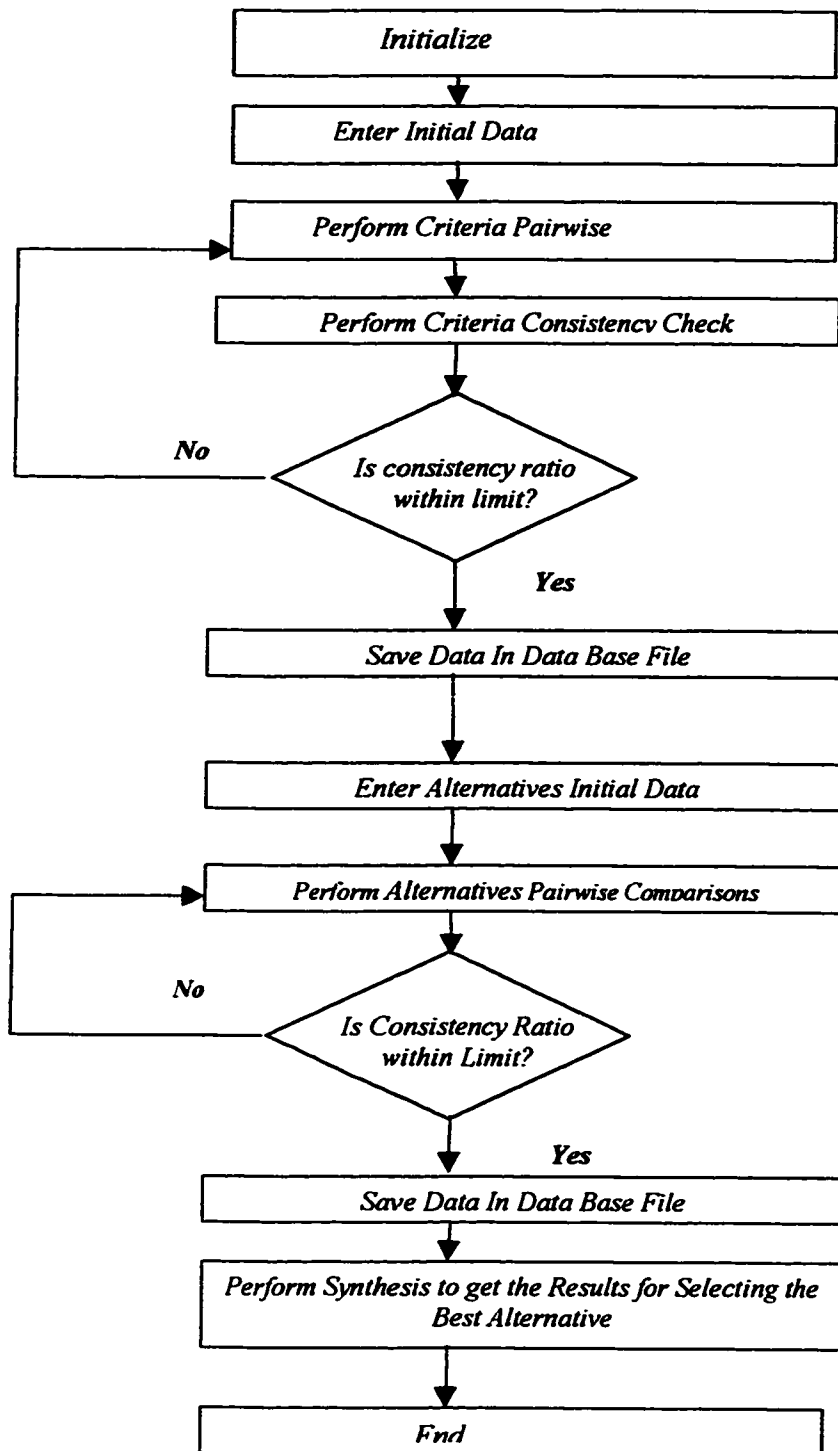

**Figure 6.1 – The Program Steps**

## 6.4 PROGRAM STEP BY STEP CALCULATIONS

The first module as shown below shows information about the program and shows the start button which should be clicked first to start the program.

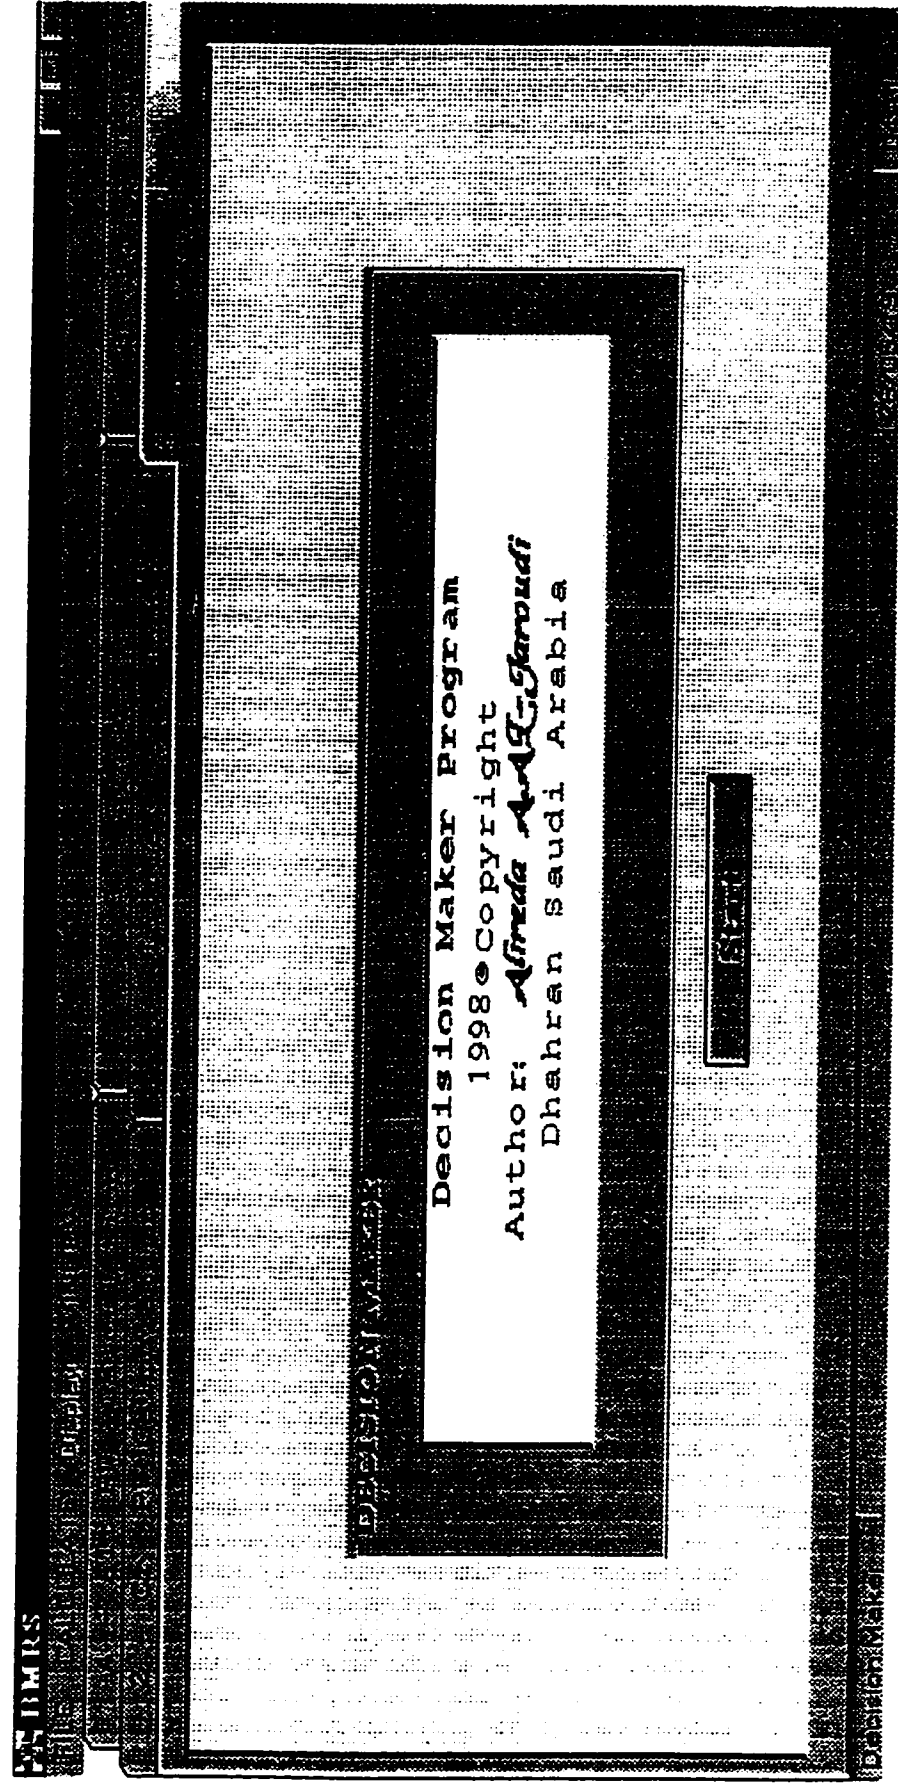

The second module “Initial Data Input” includes eight input boxes. The input text data should not exceed more than six (6) characters. These are:

- *Decision maker name*
- *Main objective*
- *Number of levels*
- *Number of criteria nodes*
- *Name of the criteria nodes*
- *Corresponding level number for each criteria node*
- *Number of sub-criteria for each criteria node*
- *Names of the sub-criteria for each criteria node*

BMRS

File Manager Display

ALIREDA


BMRS

5


63

15

The third module is the criteria pairwise comparison. This module is enabled by clicking first the "click to start button" as shown below.

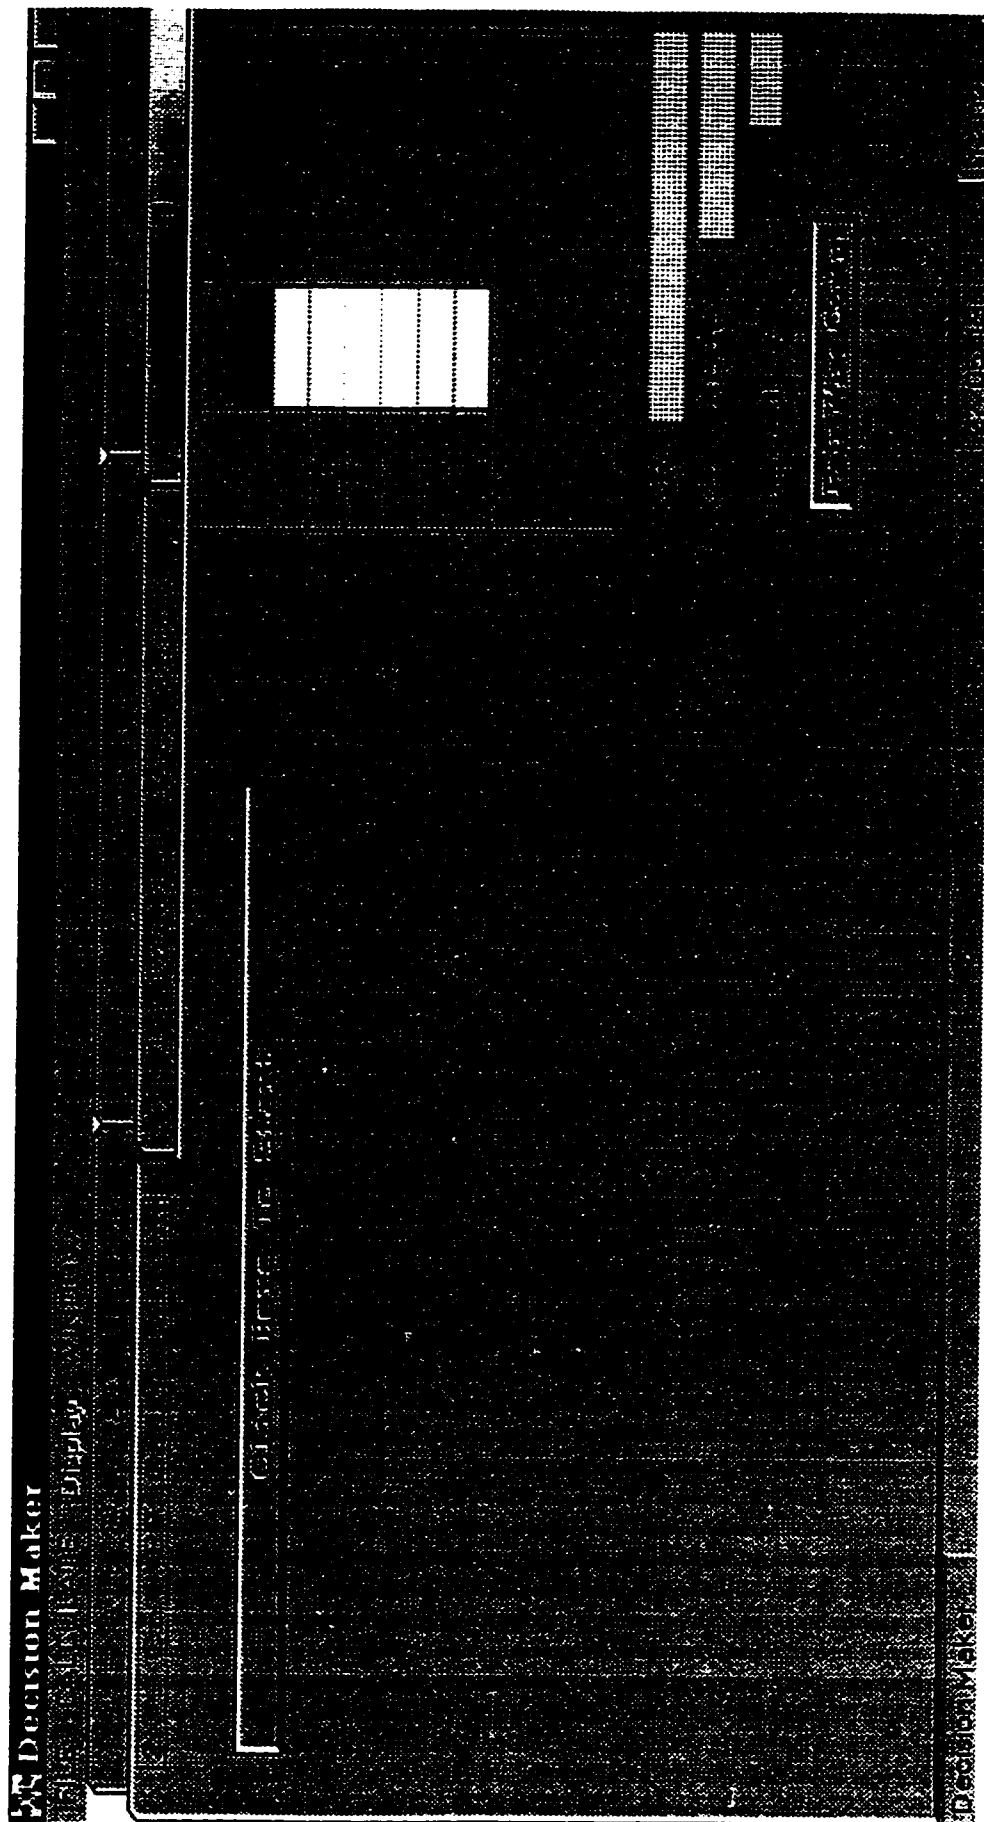


Once the button is pressed the data is entered automatically in the spread sheet. The pairwise data entered in the memory by double clicking on the first cell that corresponds

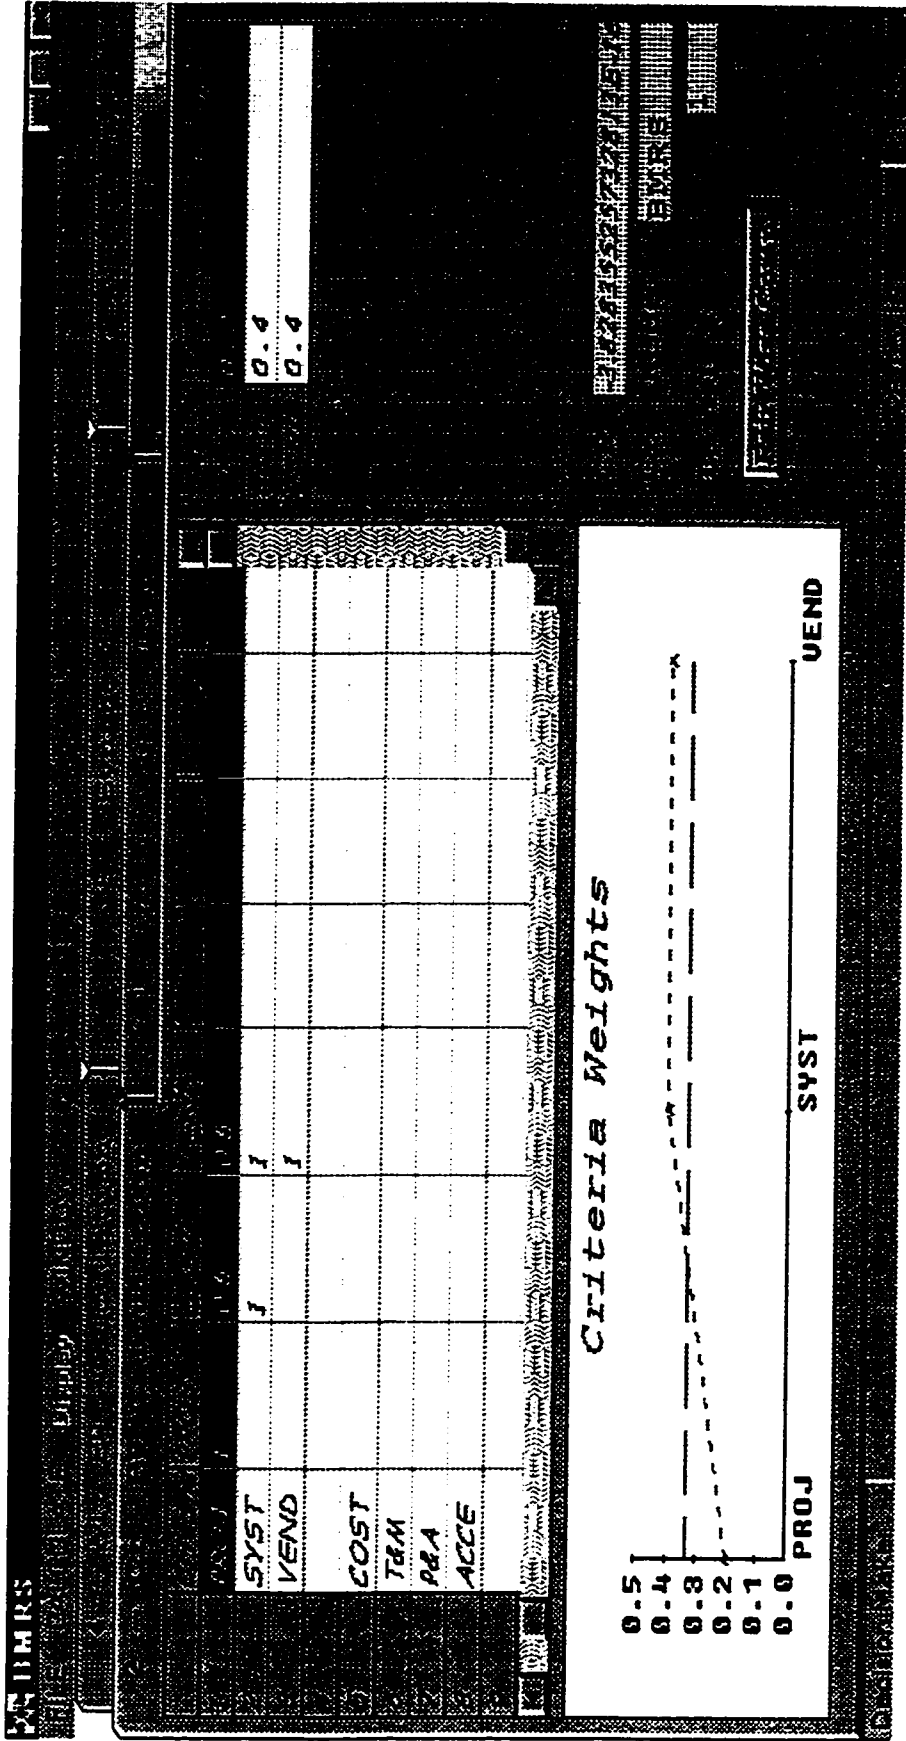




The fourth module is the initial alternative data. In this module, the alternatives are entered in the "alternatives box".

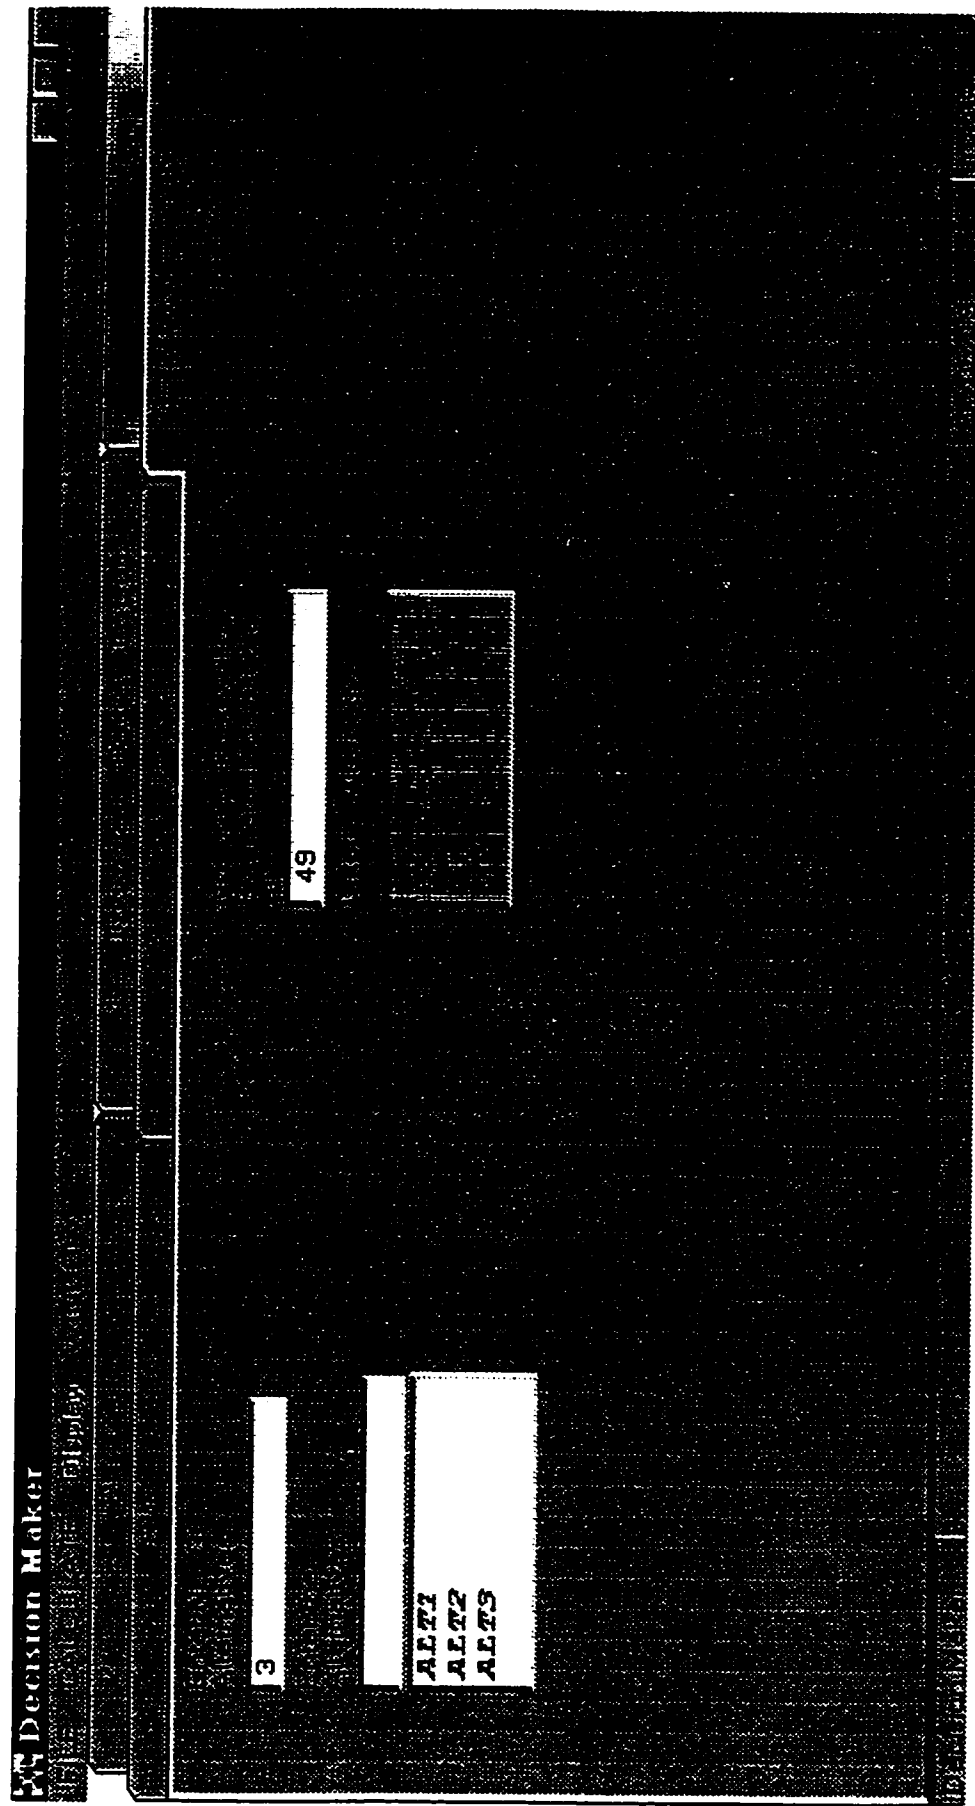





In the fifth module, the alternatives pairwise comparison is performed. The same steps are followed here as of the criteria pairwise comparison module.

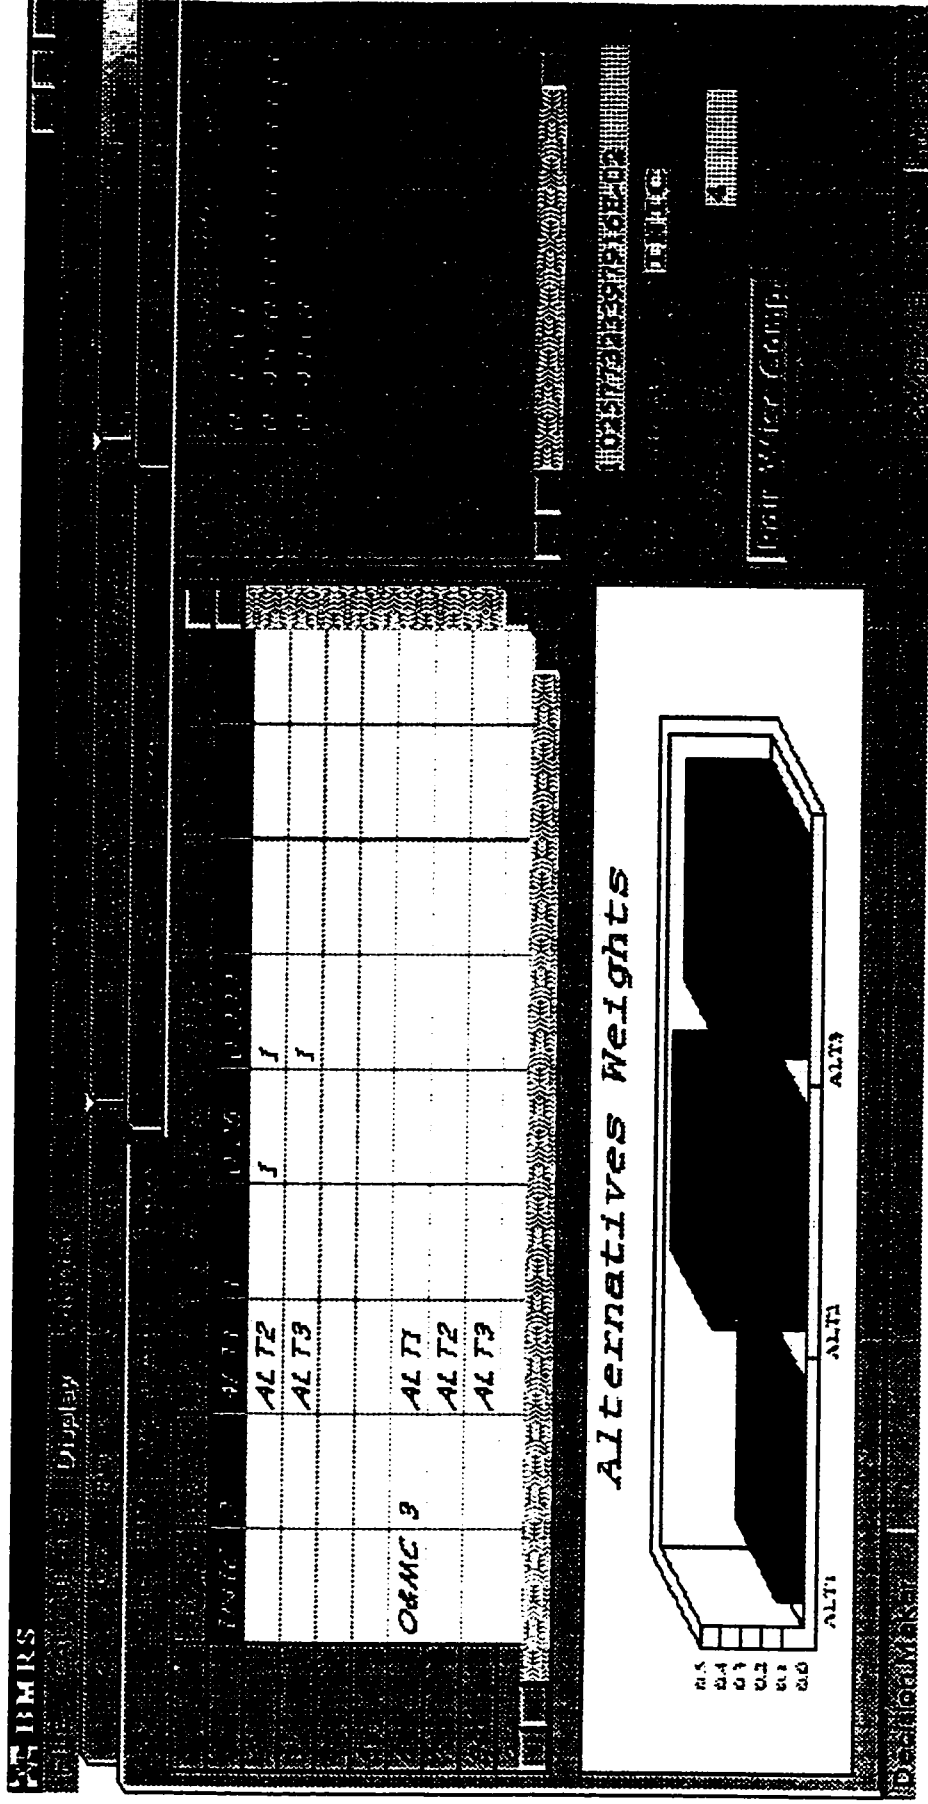

The last module, the "synthesis", calculates the results and determines the best alternative that the decision maker should consider. The module is shown below.

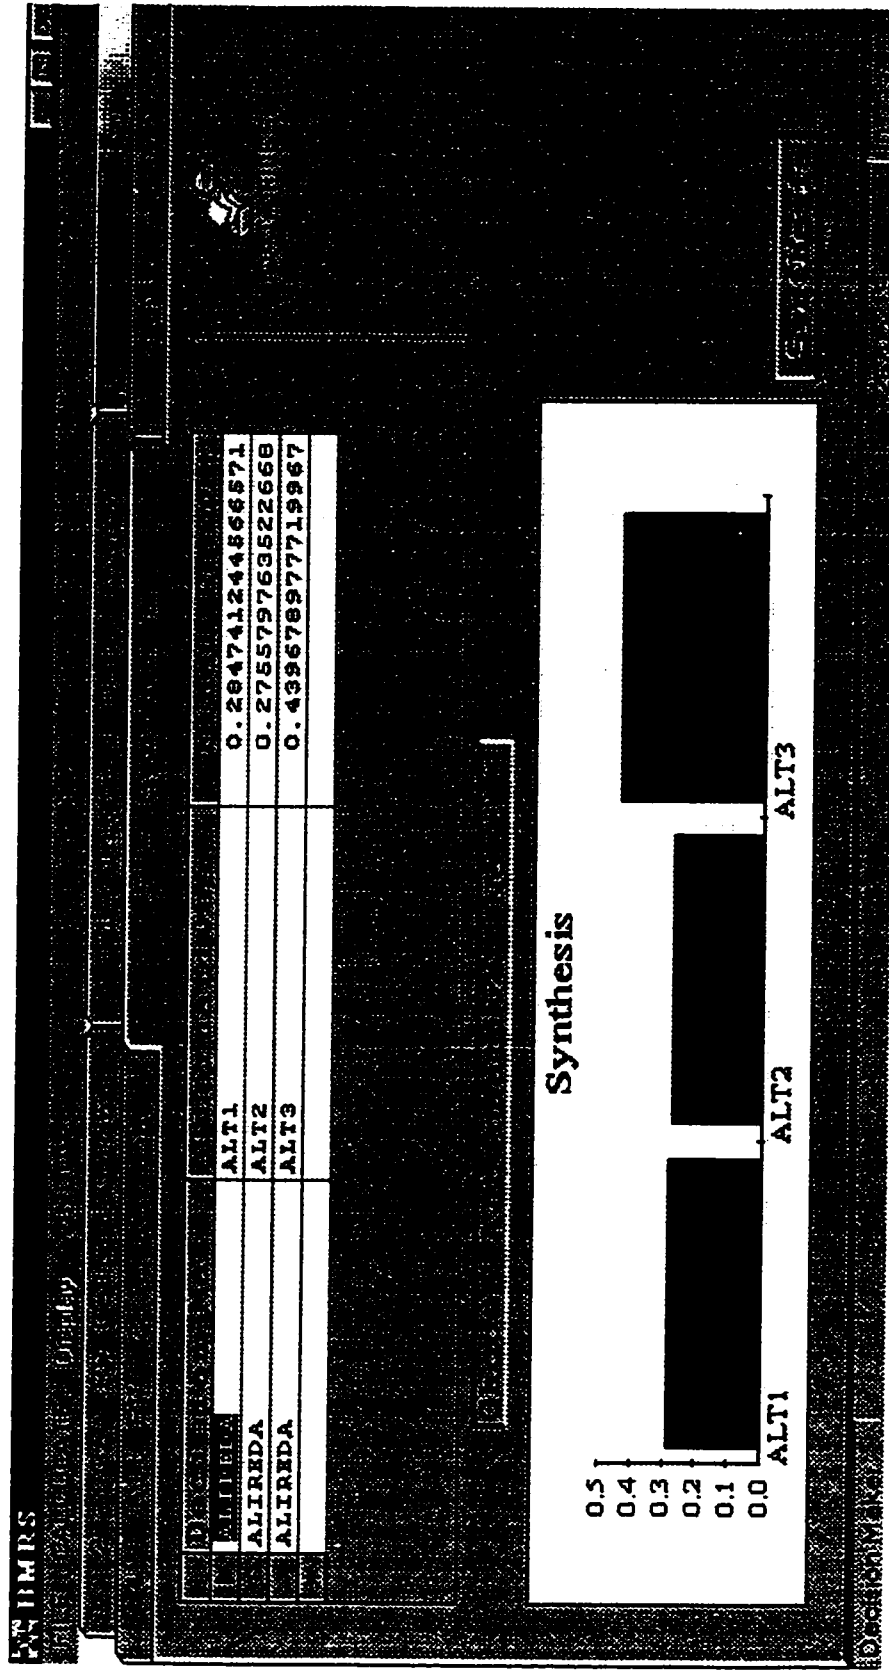

Having done the final calculation, the input data files should be saved by clicking on the save command under the file command in the menu. The synthesis module includes the data files button. With one click the user can go to the data files. Then the list of files appears then the user can choose the required files from the data base.

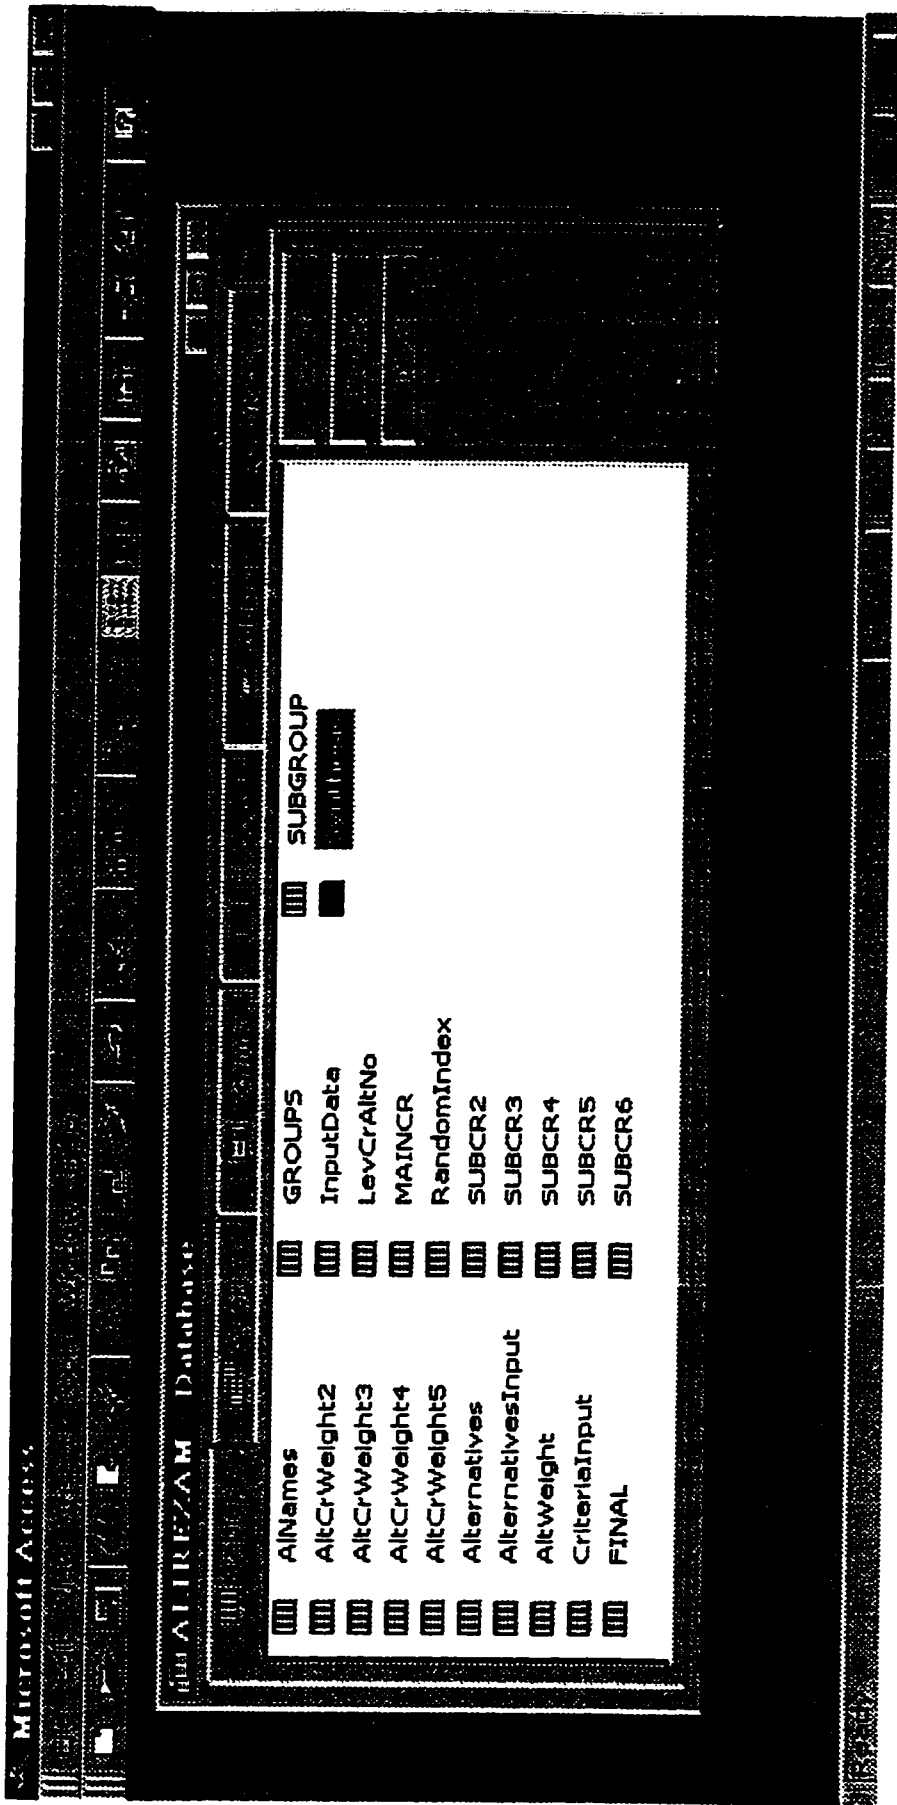

## **6.5 Program Description**

The program was created in Visual Basic (VB) which is based on the concept of object-oriented programming. Objects are control elements that interface with the users. One distinguishing property of the object-oriented programming is that each object can have an event by which it can be activated. The events for the objects under this program include mainly, click, and double click, key press, change and mouse move.

### **Mouse Move Event**

Occurs when the user moves the mouse.

### **Mouse Click Event**


Occurs when the user presses and then releases a mouse button over an object. It can also occur when the value of a control is changed.

### **Change Event**

Indicates that the contents of a control have changed. How and when this event occurs varies with the control

### **Key-press Event**

Occurs when the user presses and releases an ANSI key.

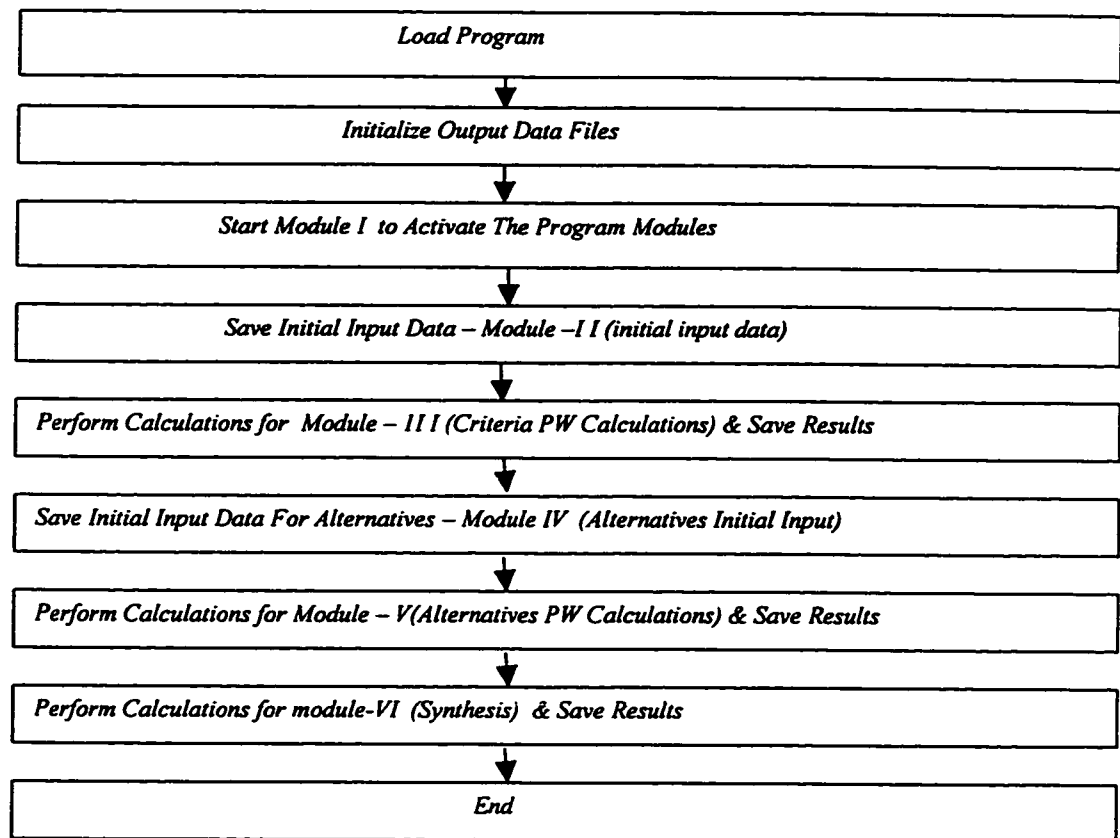

**Figure 6.2 – The Program Structure**

### **6.5.1 The Program Subroutines**

This section discusses the sub-routines of the program.

#### **Subroutine form-load**

This subroutine disables all modules except the first module, “the Start Module” and initializes the output data files.

#### **SS Command 11\_Click,**

This is a command control object. It activates all the program modules once the Start command button is clicked with the mouse.

### **6.5.1.2 Initial input data module subroutines**

They include different types of subroutines that each deal with a specific function at different events. These subroutines have mainly, click, change and key press events.

The following table shows the name of each subroutine that belong to the “Initial Input Data Module”, the event that is required to activate it and the action it performs.

Table 6.1—Initial Input Data Module Subroutines

Item No.	Subroutine	Event	Action
1	NoOfCrNode_Change	Change in the input data	Erases the data in the criteria PW calculation spreadsheets and hides the spread sheets when the data at the " number of criteria text box " is changed.
2	CrNodeName_Change	Change in the input data	Erases the data in the criteria PW calculation spreadsheets and hides the spread sheets when the data at the " Criteria Nodes Names text box " is changed.
3	LevelNo_change	Change in the input data	Erases the data in the criteria PW calculation spreadsheets and hides the spread sheets when the data at the " Level Number text box " is changed.
4	TxtNoOfCriteria_Change	Change in the input data	Erases the data in the criteria PW calculation spreadsheets and hides the spread sheets when the data at the " number of sub-criteria text box " is changed.
5	TxtCriteria_Change	Change in the input data	Erases the data in the criteria PW calculation spreadsheets and hides the spread sheets when the data at the " names of sub-criteria text box " is changed.
6	DecisionMakerName_KeyPress	Pressing enter key	Saves the "Decision Maker Name" in the memory after pressing the enter key
7	MainObjective_KeyPress		Saves the "Main Objective" in the memory after pressing the enter key
8	TxtNoOfLevels_KeyPress	Pressing enter key	Saves the "Number of Levels" in the memory after pressing the enter key
9	NoOfCrNode_KeyPress	Pressing enter key	Saves the "Number of Criteria Nodes" in the memory after pressing the enter key
10	CrNodeName_KeyPress	Pressing enter key	Saves the "Criteria Node Names" in the memory after pressing the enter key

Table 6.1—Initial Input Data Module Subroutines—Continued

Item No.	Subroutine	Event	Action
11	LevelNo_KeyPress	Pressing enter key	Saves the "level number for each coressponding criteria node" in the memory after pressing the enter key
12	TxtNoOfCriteria_Key Press	Pressing enter key	Saves the "coressponding number of sub-criteria" in the memory after pressing the enter key
13	TxtCriteria_KeyPress	Pressing enter key	Saves the "sub-criteria that belongs to each criteria nodes" in the memory after pressing the enter key
14	LstCrNodes-DblClick	Double click by the mouse	Erases the list of criteria nodes data in the list box once the mouse is clicked twice on the list box
15	LstLevels-DblClick	Double click by the mouse	Erases the levels numbers data in the list box once the mouse is clicked twice on the list box
16	NofCrList-DblClick	Double click by the mouse	Erases the no. of criteria data in the list box once the mouse is clicked twice on the list box
17	IstCriteria-DblClick	Double click by the mouse	Erases the list of criteria data in the list box once the mouse is clicked twice on the list box



### **6.5.1.3 Criteria Pair wise Calculation Module**

This module includes subroutines that are related to the calculation of the weights of the criteria, calculating the consistency ratios, testing the consistency of judgements, saving the output data in the data base files and plotting the results. The following table lists the related subroutine, describes the event for each subroutine by which it is activated, and the action it takes to implement that part of the program.

Table 6.2 – Criteria PW Comparisons Module Subroutines

Item No.	Subroutine	Event	Action
1	SSCommand3_Click	Button click event by a mouse	Shows the criteria pairwise calculation spread sheet and retrieves the initial input data and place that data in the spreadsheet.
2	GridInputData-DblClick	Double Click event by a mouse on the first cell in the first column that corresponds to each criteria group	Places each criteria group in a matrix form where the criteria names are displayed horizontally.
3	GridInputData-Click	Click by a mouse on the first cell in the first column that corresponds to each criteria group	Saves the data in the memory and makes it ready for calculation.
4	GridInputData-KeyPress	Key press event by the enter key	Changes the size of the cells on the grid (spread sheet) to a bigger size.
5	PairWiseComp-click: PairwiseCompariosn, ConsIndex, PlotData	Button click event by a mouse	Activates pairwiseComparison, ConsIndex and PlotData subroutines to perform the criteria weights calculation, consistency calculation and test, plot the data and save the output data in the Microsoft Access output data files.

Table 6.2 – Criteria PW Comparisons Module Subroutines—Continued

Item No.	Subroutine	Event	Action
6	PairwiseComparison: Anormal, Weight, Consistency	N/A	Performs the pairwise calculations for each criteria group and shows the results(criteria weights) at the criteria weight grid(spread sheet). At the first of this subroutine, it normalizes the pairwise comparisons matrices by calling subroutine "Anormal". At the second step, it performs the pairwise calculation to come up with the weights for criteria. At the third step it performs the consistency ratio calculations by calling subroutine consistency .
	ConsIndex: FileSave1	N/A	Performs the consistency test and display the results to the user. If the user accepts the results then the subroutine will call filesave1 to save the data in the output data file.
7	FileSave1: AddGroup AddSubGroup AddMCWeight1 AddSCWeight2 AddSCWeight3 AddSCWeight4	N/A	Saves the data in the output data base files. Checks if the level number is one (1) then the subroutine will call AddMCWeight1 to save the criteria weights in main criteria output data file (MAINCR); if the level number is two (2) then the subroutine will call AddSCWeight2 to save the criteria weights in level 2 sub-criteria output file (SUBCR2); if the level no. is three (3) then the subroutine will call AddSCWeight3 to save the data in level3 sub-criteria output data file (SUBCR3); if level number is 4 then the subroutine will call AddSCWeight4 to save the level no. 4 sub-criteria output data file(SUBCR4).
8	Cmbtype-Click	Click by the mouse on the list box	Changes the chart type as selected in the combo box

#### 6.5.1.4 Alternatives Initial input data module subroutines

They include different types of subroutines that each deal with a specific function at different events. These subroutines have mainly, click, change and key press events.

The following table shows the name of each subroutine that belong to the “Alternatives Initial Input Data Module”, the event that is required to activate it and the action it performs.

Table 6.3 –Alternatives Initial Input Data Module Subroutines

Item No.	Subroutine	Event	Action
1	TxtNoOfAlternatives-Change	Change in the input data	Any change in the No. Of Alternatives data box would cause this subroutine to erase the data in the Alternatives PW calculation spreadsheets located in the Alternative PW Comparison Module and hide that spread sheet. This is done to enable the user to enter new data without the need for crasing the previous data manually.
2	Alternatives-Change	Change in the input data	Same action above
3	Alternatives-List-DIClick		Erases the alternatives list once the user clicks the mouse twice to make the list for new input.

#### **6.5.1.5 Alternatives Pair wise Calculation Module Subroutines**

This module includes subroutines that are related to the calculation of the weights of the alternatives, calculating the consistency ratios, testing the consistency of judgements, saving the output data in the data base files and plotting the results. The following table lists the related subroutine, describes the event for each subroutine by which it is activated, and the action it takes to implement that part of the program.

Table 6.4 – Alternatives PW Comparisons Module Subroutines

Item No.	Subroutine	Event	Action
1	SSCommand2_Click	Button click event by a mouse	Shows the alternatives pairwise calculation spread sheet and retrieves the initial input data and place that data in the spreadsheet.
2	GrdInAltDat1-DblClick	Double Click event by a mouse on the first cell in the first column that corresponds to each group	Places each alternatives group in a matrix form where the alternatives names are displayed horizontally.
3	GrdInAltDat1-Click	Click by a mouse on the first cell in the first column that corresponds to each alternatives group	Saves the data in the memory and makes it ready for calculation.
4	GridInputData-KeyPress	Key press event by the enter key	Changes the size of the cells on the grid (spread sheet) to a bigger size.
5	CmdAlternative-click: AltCompariosn, AltConsIndex, PlotAltData	Button click event by a mouse	Activates AltComparison, AltConsIndex and PlotAltData subroutines to perform the alternatives with respect to criteria weights calculation, consistency calculation and test, plot the data and save the output data in the Microsoft Access output data files.

Table 6.4 – Alternatives PW Comparisons Module Subroutines—Continued

Item No.	Subroutine	Event	Action
6	AltComparison: AltAnormal, AltWeight1, AltConsistency	N/A	Performs the pairwise calculations for each alternative groups and shows the results(alternatives weights) at the alternatives weight grid(spread sheet). At the first step, this subroutine calls subroutine "AltAnormal" to normalize the pairwise comparisons matrices . At the second step, it calls AltWeight1 to perform the pairwise calculation to come up with the weights for alternatives with respect to criteria. At the third step it calls subroutine "Altconsistency" to perform the consistency ratio calculations .
	ConsIndex: FileSave1	N/A	Performs the consistency test and display the results to the user. If the user accepts the results then the subroutine will call filesave11 to save the data in the output data file.

Table 6.4 – Alternatives PW Comparisons Module Subroutines- Continued

Item No.	Subroutine	Event	Action
7	FileSave11: AltAdd2 AltAdd3 AltAdd4 AltAdd5	N/A	Saves the data in the output data base files. Checks if the number of levels in the decision hierarchy is two (2) then the subroutine will call AltAdd2 to save the alternatives weights in AltVCrWeight2 file; if the number of levels in the decision hierarchy is three (3) then the subroutine will call AltAdd3 to save the alternatives weights in AltVCrWeight3 data base file; if the number of levels in the decision hierarchy is four (4) then the subroutine will call AltAdd4 to save the alternatives weights in AltVCrWeight4 data base file; if the number of levels in the decision hierarchy is five (5) then the subroutine will call AltAdd5 to save the alternatives weights in AltVCrWeight5 data base file.
8	Cmbtype2-Click	Click by the mouse on the list box	Changes the chart type as selected in the combo box



### 6.5.1.6 Synthesis Calculations Module Subroutines

This module performs the calculations for the final results. The following table explains about the related subroutine for this module.

Table 6.5 – Subroutines for the Synthesis Module

Item No.	Subroutine	Event	Action
1	SSCmdSynthesis_Click: SynthesisF PlotDataSynthesis	Button click event by a mouse	Calls SynthesisF to Perform the synthesis calculations where all the weights are aggregated in order to come up with a rating for all the alternatives. Additionally it saves the results in the output data file-- "Synthesis". After having done that it calls PlotDataSynthesis to plot the data.

## **CHAPTER SEVEN**

### **PROJECT ALTERNATIVES EVALUATION PROBLEM**

#### **CASE STUDY**

##### **7.1 SCOPE**

In this chapter, a case study is presented to demonstrate the application of the developed computerized decision-making model. The model is applied here to rank project alternatives, however, this model can be applied to all aspects of the project.

Under the scope of the study, a major industrial company has decided to replace its current mobile radio communications system, infrastructure and end user equipment with a new state of the art mobile radio system. This project is viewed as a big investment by the company which it will enhance the production of oil and place the company at the competitive edge.

##### **7.2 ALTERNATIVES**

Three mobile radio system alternatives were investigated. These are: 1) to replace the current system with an analog system which has been tried, field proven and used by other entities; 2) to replace the current system with open system architecture. This alternative might end up in potential cost and schedule risks; 3) to replace the current system with proprietary system architecture. This alternative may carry with it discontinued vendor future support due to using non-standard equipment.

The next section describes how the AHP and the developed program can be used to assist the company in ranking these alternatives.

The main objective of this decision making process is to determine the most viable alternative for implementing the project. The objective is located at level one (1) of the hierarchy as depicted in the next figure and this is called the objective node. The factors were divided into three main groups as explained in the previous chapter.

Weights that reflect the influence of the major decision elements: the project, system and vendor which constitute the major key elements in the overall decision can be assigned by performing the pairwise comparison at each level of the hierarchy. These weights were calculated by using the program developed by the author.

### **7.3 METHODOLOGY APPLICATIONS AND DISCUSSION**

Starting with the first step, the decision problem is formulated in a hierarchical structure. The decision problem is broken into a hierarchy of interrelated decision elements.

The next diagram shows the structure of the hierarchy based on the distribution of the decision elements per the related groups. At the top lies the most important objective, which is the selection of the most appropriate telecommunications project or technology to meet the oil and gas production demand.

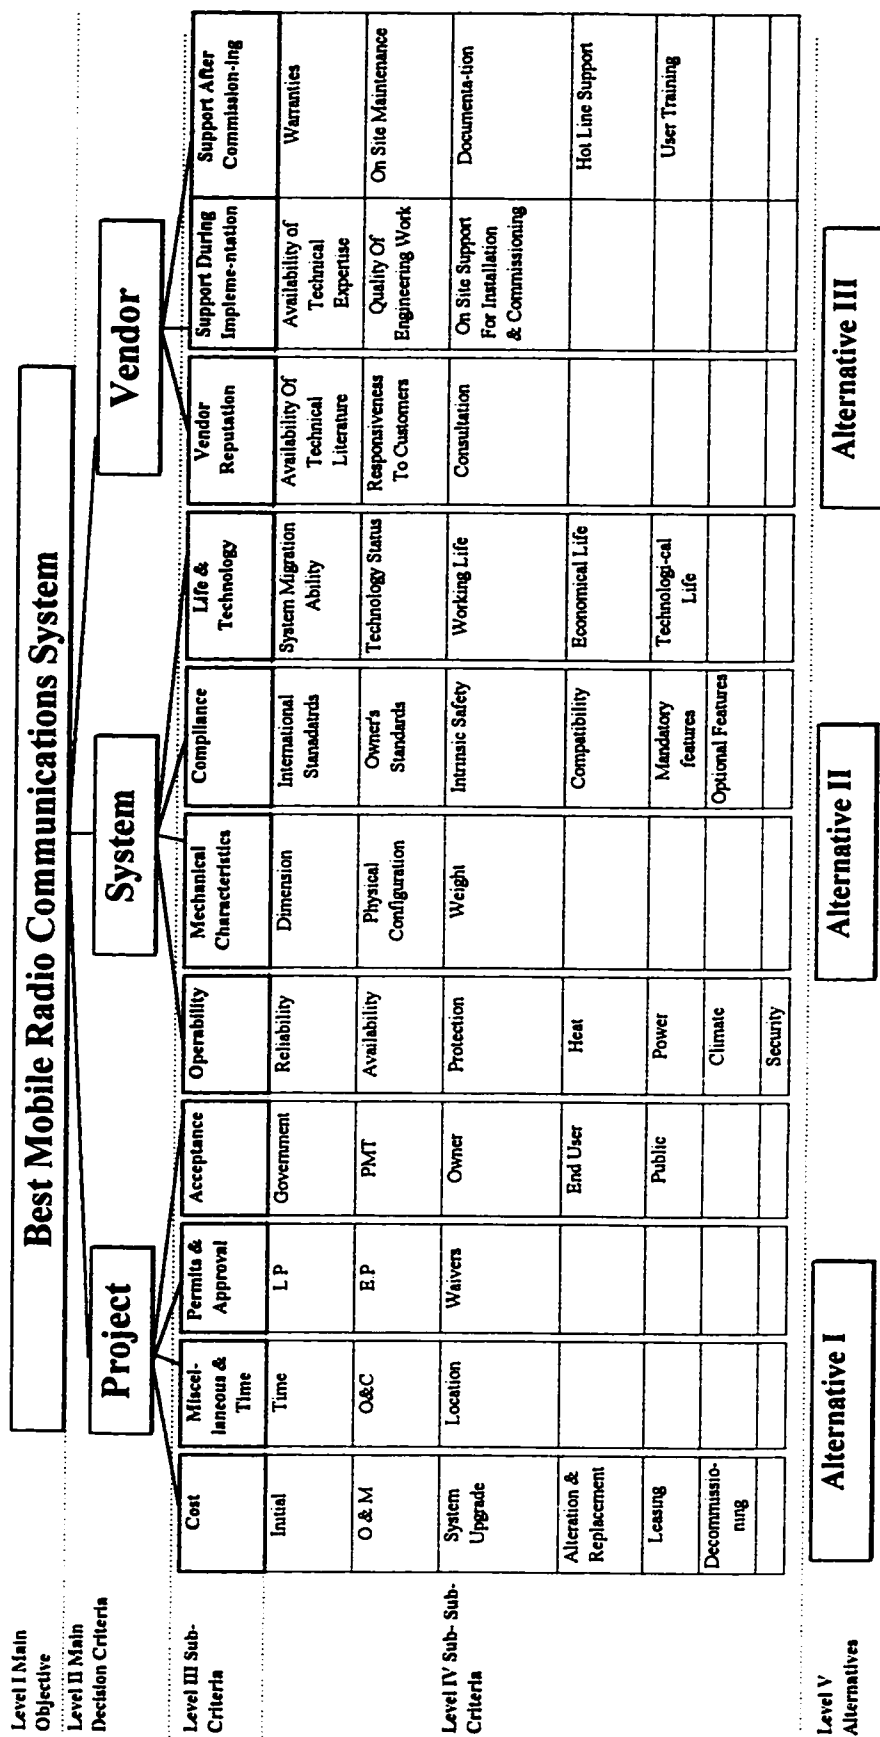


Figure 7.1 -- DECISION HIERARCHY

In the second level of the hierarchy, the main criteria, the less controllable, the more risky and uncertain are listed. These are project criterion, system criterion and vendor criterion.

Each of these criteria is broken down to sub- criteria in the next level, level number three. In the third level, project criterion is broken down into six (6) sub- criteria. These are total cost of the project, miscellaneous & time to implement the project, permits, approvals, and acceptance of the project by the members who are concerned with the project.

The decision-maker has to judge if any of these criteria has more influence or importance than other criteria. The owner might decide that time is the most important factor, as without it the objective of the project cannot be met. For example, when launching a new product, the development and implementation processes have to be within a certain period of time in order to launching the product at the required time. Otherwise, losses can be incurred.

System criterion is broken into four (4) sub- criteria in the next level, level number three. These are operability or operation characteristics, mechanical characteristics, and compliance of the equipment to standards and specifications and life & technology of the system equipment.

Vendor criterion is broken into three (3) sub- criteria. These are vendor reputation (i.e., is the vendor responsive to customers, does he/she provide technical information about his products etc.), vendor support during commissioning and support after commissioning.

The sub- criteria in the third level are broken further to sub-sub- criteria in the fourth level. Cost is broken further into six (6) elements. These are initial cost to engineer, constructing, testing and commissioning the system, operation & maintenance cost, future system upgrade cost, alteration and replacement cost, leasing cost in the event that some elements will be leased and decommissioning cost.

Miscellaneous & time is broken further into three (3) sub- criteria. These are, time ownership & control and location of the project.

Permit and approval under project criterion is broken into three elements. These are land use permits, equipment importation permit, and waiver to use non-standard equipment or implementation/construction method.

Acceptance is broken into five (5) elements in the fourth level, the elements include, acceptance by the government, acceptance by the Project Management Team, acceptance by the owner, acceptance by the end user and acceptance by the public. The most dominant factor here is acceptance by the government, if the system is not accepted by the government then the project can not be implemented.

Operation characteristic is broken further into seven (7) sub- criteria: reliability, equipment availability, equipment protection during failure, heat, power, climatic criterion and security of the equipment during operation.

Mechanical characteristic is broken into three criteria. These include dimension of the equipment, physical characteristic and the weight of the equipment. As mentioned above these criteria can be dropped from the analysis since they received very low importance as indicated from the survey results. For the sake of the study, these will be included in the analysis.

Compliance is broken into six (6) sub- criteria. The sub- criteria include system compliance to international standards, compliance to owner standards, intrinsic safety, compatibility to the existing system, mandatory and optional features compliance.

Life and technology is broken into five (5) factors. These are system migration ability to future upgrades and developments, the technology status of the system equipment, system working life, and system economical life and system technological life.

Vendor reputation (vendor support to customers before implementation) under the vendor criterion is broken further into these sub- criteria: availability of technical literature, responsiveness to customers and consultation.

Vendor support during implementation is broken into availability of technical expertise, quality of engineering work, and on site support for installation.

Finally, Vendor support after commissioning is broken into warranties, on site maintenance, documentation, hot line support and user training.

The next table shows the criteria grouping with their sub- criteria and their abbreviations.

Table 7.1 - criteria Grouping and their Abbreviations

Best Mobile Radio System	BMRS	1	3	Project	PROJ
				System	SYST
				Vendor	VEND
Project	PROJ	2	4	Cost	COST
				Time & Miscellaneous	T&M
				Permits and Approvals	P&A
				Acceptance	ACCE
System	Syst	2	4	Operation	OPER
				Characteristics	
				Mechanical	MC
				Characteristics	
				Compliance	COMPL
				Life & Technology	L&T
Vendor	VEND	2	3	Vendor Reputation	VR
				Vendor Support During	VSDI
				Implementation	
				Vendor Support After	VSAC
				Commissioning	
Cost	COST	3	6	Initial Cost	INITC
				Operation &	O&MC
				Maintenance Cost	
				System Upgrade Cost	SUC
				Alteration & Repair	A&RC
				Cost	
				Leasing Cost	LEAC
				Decommissioning Cost	DECC
Time & Miscellaneous	T&M	3	3	Time	Time
				Ownership & Control	O&C



Table 7.1 - Continued

Criteria Node	Abbreviation	Level	Number Of Sub-Criteria	Sub-Criteria	Abbreviation
				Location	Loca
Permits & Approval	P&A	3	3	Land Use Permit	LP
				Equipment Import Permit	EP
				Waiver	WAIV
Acceptance	ACCE	3	5	Government Acceptance	GOVA
				PMT Accept.	PMTA
				Owners Accept.	OWNA
				End User Accept.	EUA
				Public Acceptance	PUBA
Operation Characteristics	OPER	3	7	Reliability	RELI
				Availability	AVAI
				Protection During Failure	PROT
				Heat	HEAT
				Power	POWE
				Climatic Condition Compliance	CLIM
				Security	SECU
Mechanical Characteristics	MC	3	3	Dimension	DIME
				Physical Characteristics	PC
				Weight	WEIG
Compliance	COMPL	3	6	International Standards	ITAN
				Owner's Standards	OSTA
				Intrinsic Safety	IS

Table 7.1 – Continued

Criteria Nodes	Abbreviation	Level No	Number Of Sub-Criteria	Sub-Criteria	Abbreviation
				Compatibility	COMPAT
				Mandatory Features	MF
				Optional Features	OF
Life & Technology	L&T	3	5	System Migration Ability	SMA
				Technology Status	TECS
				Economical Life	EL
				Working Life	WL
				Technological Life	TL
Vendor Reputation	VR	3	3	Availability of Technical Literature	AOTL
				Responsiveness to Customers	RTC
				Consultation	CONS
Vendor Support During Implementation	VSDI	3	3	Availability of Technical Expertise	AOTE
				Quality of Engineering Work	QOEW
				On Site Support For Installation & Commissioning	OSSF
Vendor Support After Commissioning	VSAC	3	5	Warranty	WARR
				On-Site-Maintenance	OSM
				Documentation	DOCU
				Hot Line Support	HLS
				User Training	UT

## 7.4 CRITERIA PAIRWISE COMPARISON

In the next step, the pairwise comparison was performed for all the criteria. The next tables (tables 7.2 - 7.16) show the criteria pairwise comparison.

Table 7.2 – Main Criteria Pairwise Comparison

	<i>PROJ</i>	<i>SYST</i>	<i>VEND</i>
<i>PROJ</i>	1	0.5	0.5
<i>SYST</i>		1	1
<i>VEND</i>			1

Table 7.3 – Project Sub- Criteria Pairwise Comparison

	<i>COST</i>	<i>T&amp;M</i>	<i>P&amp;A</i>	<i>ACCE</i>
<i>COST</i>	1	1	0.5	0.5
<i>T&amp;M</i>		1	0.2	1
<i>P&amp;A</i>			1	1
<i>ACCE</i>				1

Table 7.4 – System Sub- Criteria Pairwise Comparison

	<i>OPER</i>	<i>MC</i>	<i>COMPL</i>	<i>L&amp;T</i>
<i>OPER</i>	1	4	1	1
<i>MC</i>		1	0.143	0.143
<i>COMPL</i>			1	1
<i>L&amp;T</i>				1

Table 7.5 – Vendor Sub- Criteria Pairwise Comparison

	<i>VR</i>	<i>VSDI</i>	<i>VSAC</i>
<i>VR</i>	1	0.5	0.5
<i>VSDI</i>		1	1
<i>VSAC</i>			1

Table 7.6 – Cost Sub- Criteria Pairwise Comparison

	<i>INIC</i>	<i>O&amp;MC</i>	<i>SUC</i>	<i>A&amp;RC</i>	<i>LEAC</i>	<i>DECC</i>
<i>INIC</i>	1	0.5	2	2	2	4
<i>O&amp;MC</i>		1	2	1	2	4
<i>SUC</i>			1	0.5	1	6
<i>A&amp;RC</i>				1	2	3
<i>LEAC</i>					1	2
<i>DECC</i>						1

Table 7.7 – Time &amp; Miscellaneous Sub- Criteria Pairwise Comparison

	<i>TIME</i>	<i>O&amp;C</i>	<i>LOCA</i>
<i>TIME</i>	1	0.333	2
<i>O&amp;C</i>		1	4
<i>LOCA</i>			1

Table 7.8 – Permits &amp; Approval Sub- Criteria Pairwise Comparison

	<i>LP</i>	<i>EP</i>	<i>WAIV</i>
<i>LP</i>	1	1	2
<i>EP</i>		1	2
<i>WAIV</i>			1

Table 7.9 – Project Acceptance Sub- Criteria Pairwise Comparison

	<i>GOVA</i>	<i>PMTA</i>	<i>OWNA</i>	<i>EUA</i>	<i>PUBA</i>
<i>GOVA</i>	1	2	2	2	2
<i>PMTA</i>		1	0.5	0.333	0.333
<i>OWNA</i>			1	0.333	0.25
<i>EUA</i>				1	0.5
<i>PUBA</i>					1

Table 7.10 – Operation Characteristics Sub- Criteria Pairwise Comparison

	<i>RELI</i>	<i>AVAI</i>	<i>PROT</i>	<i>HEAT</i>	<i>POWE</i>	<i>CLIM</i>	<i>SECU</i>
<i>RELI</i>	1	1	2	4	5	4	1
<i>AVAI</i>		1	2	2	2	4	1
<i>PROT</i>			1	2	2	3	1
<i>HEAT</i>				1	1	1	1
<i>POWE</i>					1	1	1
<i>CLIM</i>						1	1
<i>SECU</i>							1

Table 7.11 – Physical Characteristics Sub - Criteria Pairwise Comparison

	<i>DIME</i>	<i>PC</i>	<i>WEIG</i>
<i>DIME</i>	1	1	1
<i>PC</i>		1	1
<i>WEIG</i>			1

Table 7.12 Compliance Sub- Criteria Pairwise Comparison

	<i>ISTA</i>	<i>OSTA</i>	<i>IS</i>	<i>COMPA</i>	<i>MF</i>	<i>OF</i>
<i>ISTA</i>	1	0.25	0.25	0.2	0.5	1
<i>OSTA</i>		1	1	1	1	2
<i>IS</i>			1	1	1	4
<i>COMPA</i>				1	1	2
<i>MF</i>					1	2
<i>OF</i>						1

Table 7.13 – System Life &amp; Technology Sub - Criteria Pairwise Comparison

	<i>SMA</i>	<i>TECS</i>	<i>EL</i>	<i>WL</i>	<i>TL</i>
<i>SMA</i>	1	1	0.333	0.25	1
<i>TECS</i>		1	1	1	1
<i>EL</i>			1	2	1
<i>WL</i>				1	1
<i>TL</i>					1

Table 7.14 –Vendor Reputation Sub – Criteria Pairwise Comparison

	<i>AOTL</i>	<i>RTC</i>	<i>CONS</i>
<i>AOTL</i>	1	0.25	0.333
<i>RTC</i>		1	1
<i>CONS</i>			1

Table 7.15 – Vendor Support During Implementation Sub - Criteria Pairwise Comparison

	<i>AOTE</i>	<i>QOEW</i>	<i>OSSF1</i>	<i>WARR</i>	<i>OSM</i>
<i>AOTE</i>	1	0.5	0.5	1	0.2
<i>QOEW</i>		1	1	2	2
<i>OSSF1</i>			1	2	1
<i>WARR</i>				1	0.333
<i>OSM</i>					1

Table 7.16 – Vendor Support After Commissioning Sub - Criteria Pairwise Comparison

	<i>DOCU</i>	<i>HLS</i>	<i>UT</i>
<i>DOCU</i>	1	0.2	0.333
<i>HLS</i>		1	1
<i>UT</i>			1



## 7.5 ALTERNATIVES WITH RESPECT TO CRITERIA PAIRWISE COMPARISONS

The next tables (Tables 7.17-7.65) show the alternatives with respect to criteria pairwise comparisons.

Table 7.17 – Alternatives With Respect to Initial Cost Pairwise Comparison

G-Alt Node	No. Of Alt	Alternative	ALT1	ALT2	ALT3
INIC	3	ALT1	1	0.25	0.333
		ALT2		1	1
		ALT3			1

Table 7.18 – Alternatives With Respect to Operation & Maintenance Cost Pairwise Comparison

G-Alt Node	No. Of Alt	Alternative	ALT1	ALT2	ALT3
O&MC	3	ALT1	1	0.333	0.333
		ALT2		1	1
		ALT3			1

Table 7.19 – Alternatives With Respect to Systems Upgrade Cost Pairwise Comparison

G-Alt Node	No. Of Alt	Alternative	ALT1	ALT2	ALT3
SUC	3	ALT1	1	0.5	0.167
		ALT2		1	0.143
		ALT3			1

Table 7.20 – Alternatives With Respect to Alteration & Repair Cost Pairwise Comparison

G-Alt Node	No. Of Alt	Alternative	ALT1	ALT2	ALT3
A&RC	3	ALT1	1	0.5	0.2
		ALT2		1	0.2
		ALT3			1

Table 7.21 – Alternatives With Respect to Leasing Cost Pairwise Comparison

G-Alt Node	No. Of Alt	Alternative	ALT1	ALT2	ALT3
LEAC	3	ALT1	1	1	1
		ALT2		1	1
		ALT3			1

Table 7.22 Alternatives With Respect to Decommissioning Cost Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>DECC</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.23 – Alternatives With Respect to Time Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>TIME</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>4</i>
		<i>ALT2</i>		<i>2</i>	<i>4</i>
		<i>ALT3</i>			<i>1</i>

Table 7.24 – Alternatives With Respect to Ownership &amp; Control Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>O&amp;C</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.25 – Alternatives With Respect to Location Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>LOCA</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.26– Alternatives With Respect to Land Permit Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>LP</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.27 – Alternatives With Respect to Equipment Permit Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>EP</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.28 - Alternatives With Respect to Waivers Pairwise Comparison

Gr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
WAIV	3	ALT1	1	1	1
		ALT2		1	1
		ALT3			1

Table 7.29 – Alternatives With Respect to Government Acceptance Pairwise Comparison

Gr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
GOVA	3	ALT1	1	1	1
		ALT2		1	1
		ALT3			1

Table 7.30 – Alternatives With Respect to PMT Acceptance Pairwise Comparison

Gr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
PMTA	3	ALT1	1	2	4
		ALT2		1	4
		ALT3			1

Table 7.31 – Alternatives With Respect to Owner Acceptance Pairwise Comparison

Gr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
OWNA	3	ALT1	1	2	4
		ALT2		1	4
		ALT3			1

Table 7.32 – Alternatives With Respect to End Users Acceptance Pairwise Comparison

Gr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
EUA	3	ALT1	1	1	1
		ALT2		1	1
		ALT3			1

Table 7.33 – Alternatives With Respect to Public Acceptance Pairwise Comparison

Gr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
PUBA	3	ALT1	1	1	1
		ALT2		1	1
		ALT3			1

Table 7.34– Alternatives With Respect to Reliability Pairwise Comparison

<i>C=Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>RELI</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>0.2</i>
		<i>ALT2</i>		<i>1</i>	<i>0.2</i>
		<i>ALT3</i>			<i>1</i>

Table 7.35 – Alternatives With Respect to Availability Pairwise Comparison

<i>C=Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>AVAI</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.36 – Alternatives With Respect to Protection Pairwise Comparison

<i>C=Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>PROT</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>0.2</i>
		<i>ALT2</i>		<i>1</i>	<i>0.2</i>
		<i>ALT3</i>			<i>1</i>

Table 7.37 – Alternatives With Respect to Heat Pairwise Comparison

<i>C=Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>HEAT</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>0.333</i>
		<i>ALT2</i>		<i>1</i>	<i>0.333</i>
		<i>ALT3</i>			<i>1</i>

Table 7.38 – Alternatives With Respect to Power Pairwise Comparison

<i>C=Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>POWE</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.39 – Alternatives With Respect to Climatic Condition Pairwise Comparison

<i>C=Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>CLIM</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>0.333</i>	<i>0.2</i>
		<i>ALT2</i>		<i>1</i>	<i>0.25</i>
		<i>ALT3</i>			<i>1</i>

Table 7.40 – Alternatives With Respect to Security Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>SECU</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>0.5</i>	<i>0.5</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.41 – Alternatives With Respect to Dimension Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>DIME</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>0.2</i>
		<i>ALT2</i>		<i>1</i>	<i>0.25</i>
		<i>ALT3</i>			<i>1</i>

Table 7.42 – Alternatives With Respect to Physical Configuration Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>PC</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>0.2</i>
		<i>ALT2</i>		<i>1</i>	<i>0.2</i>
		<i>ALT3</i>			<i>1</i>

Table 7.43 – Alternatives With Respect to Weight Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>WEIG</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.44– Alternatives With Respect to International Standards Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>ISTA</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>0.167</i>	<i>0.143</i>
		<i>ALT2</i>		<i>1</i>	<i>0.5</i>
		<i>ALT3</i>			<i>1</i>

Table 7.45 – Alternatives With Respect to Owner Standards Pairwise Comparison

<i>G-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>OSTA</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>0.5</i>	<i>0.143</i>
		<i>ALT2</i>		<i>1</i>	<i>0.5</i>
		<i>ALT3</i>			<i>1</i>

Table 7.46 – Alternatives With Respect to Intrinsic Safety Pairwise Comparison

G-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
IS	3	ALT1	1	4	4
		ALT2		1	1
		ALT3			1

Table 7.47 – Alternatives With Respect to Compatibility Pairwise Comparison

G-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
COMPA	3	ALT1	1	0.2	0.2
		ALT2		1	0.5
		ALT3			1

Table 7.48 – Alternatives With Respect to Mandatory Features Pairwise Comparison

G-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
MF	3	ALT1	1	1	0.333
		ALT2		1	0.5
		ALT3			1

Table 7.49 – Alternatives With Respect to Optional Features Pairwise Comparison

G-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
OF	3	ALT1	1	0.5	0.333
		ALT2		1	0.5
		ALT3			1

Table 7.50 – Alternatives With Respect to System Migration Ability Pairwise Comparison

G-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
SMA	3	ALT1	1	0.5	0.5
		ALT2		1	1
		ALT3			1

Table 7.51– Alternatives With Respect to Technology Status Pairwise Comparison

G-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
TECS	3	ALT1	1	2	4
		ALT2		1	2
		ALT3			1

Table 7.52 Alternatives With Respect to Economical Life Pairwise Comparison

Cr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
EL	3	ALT1	1	0.333	0.25
		ALT2		1	0.5
		ALT3			1

Table 7.53 – Alternatives With Respect to Working Life Pairwise Comparison

Cr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
WL	3	ALT1	1	0.5	0.333
		ALT2		1	0.5
		ALT3			1

Table 7.54 Alternatives With Respect to Technological Life Pairwise Comparison

Cr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
TL	3	ALT1	1	0.333	0.25
		ALT2		1	0.5
		ALT3			1

Table 7.55 Alternatives With Respect to Availability of Technical Literature  
Pairwise Comparison

Cr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
AOTL	3	ALT1	1	2	2
		ALT2		1	1
		ALT3			1

Table 7.56 Alternatives With Respect to Responsiveness to Customers  
Pairwise Comparison

Cr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
RTC	3	ALT1	1	2	1
		ALT2		1	0.5
		ALT3			1

Table 7.57 Alternatives With Respect to Consultation Pairwise Comparison

Cr-Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
CONS	3	ALT1	1	2	1
		ALT2		1	0.333
		ALT3			1

Table 7.58 Alternatives With Respect to Availability of Technical Expertise  
Pairwise Comparison

Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
AOTE	3	ALT1	1	1	0.2
		ALT2		1	0.25
		ALT3			1

Table 7.59 Alternatives With Respect to Quality of Engineering Work  
Pairwise Comparison

Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
QOEW	3	ALT1	1	2	1
		ALT2		1	0.5
		ALT3			1

Table 7.60 Alternatives With Respect to On Site Support for Installation  
Pairwise Comparison

Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
OSSF1	3	ALT1	1	1	0.2
		ALT2		1	0.25
		ALT3			1

Table 7.61 Alternatives With Respect to Warranty Pairwise Comparison

Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
WARR	3	ALT1	1	1	0.25
		ALT2		1	0.5
		ALT3			1

Table 7.62 Alternatives With Respect to On Site Maintenance Pairwise Comparison

Alt-Node	No-Of-Alt	Alternative	ALT1	ALT2	ALT3
OSM	3	ALT1	1	0.5	0.333
		ALT2		1	0.333
		ALT3			1



Table 7.63 Alternatives With Respect to Documentation Pairwise Comparison

<i>Gr-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>DOCU</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>4</i>	<i>4</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.64 Alternatives With Respect to Hot Line Support Pairwise Comparison

<i>Gr-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>HLS</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

Table 7.65 Alternatives With Respect to User Training Pairwise Comparison

<i>Gr-Alt-Node</i>	<i>No-Of-Alt</i>	<i>Alternative</i>	<i>ALT1</i>	<i>ALT2</i>	<i>ALT3</i>
<i>UT</i>	<i>3</i>	<i>ALT1</i>	<i>1</i>	<i>1</i>	<i>1</i>
		<i>ALT2</i>		<i>1</i>	<i>1</i>
		<i>ALT3</i>			<i>1</i>

The next figures show the step by step instructions for entering the data and performing the criteria and alternatives pairwise comparisons calculation along with a consistency check. Starting with the initial data input, refer to the next figure.

BMRS		Display	
ALIREDA	15		
BMRS			
5			
63			

Figure 7.2 Initial input Data

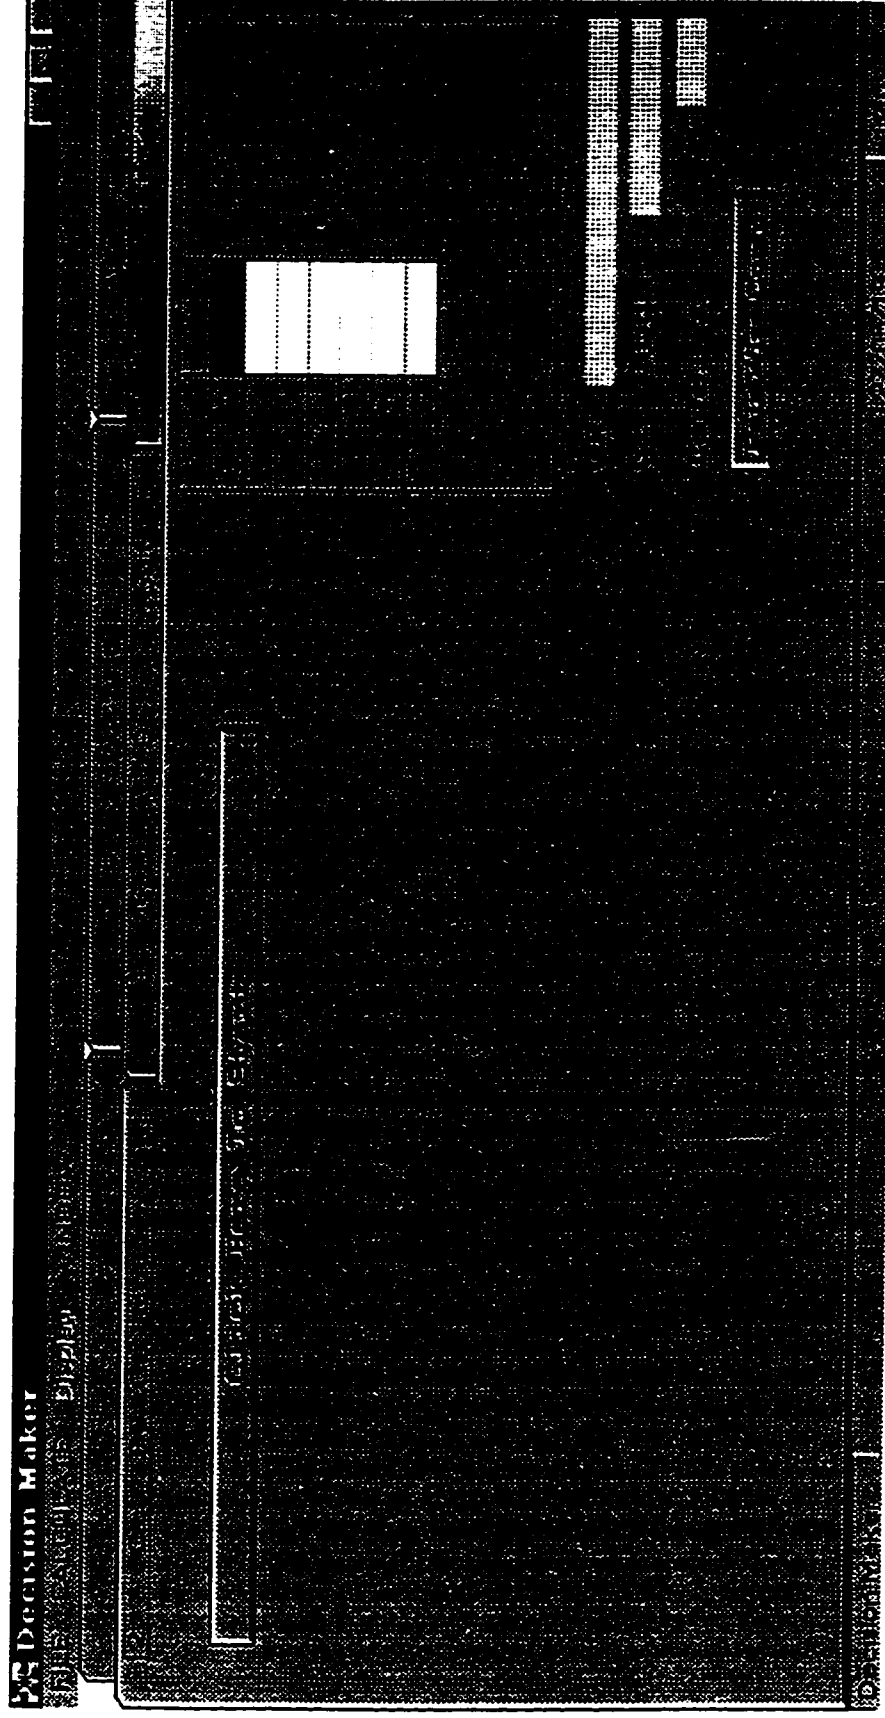


Figure 7.3 – Criteria Pairwise Comparison & Consistency Test

The process continues with pairwise comparison, ranking of criteria, and alternatives with respect to criteria and consistency check as shown in the figures. The last step involves the aggregation of results, the synthesis. The last figure shows the final results. Alternative no. 3 is the most appropriate for the company to decide on.

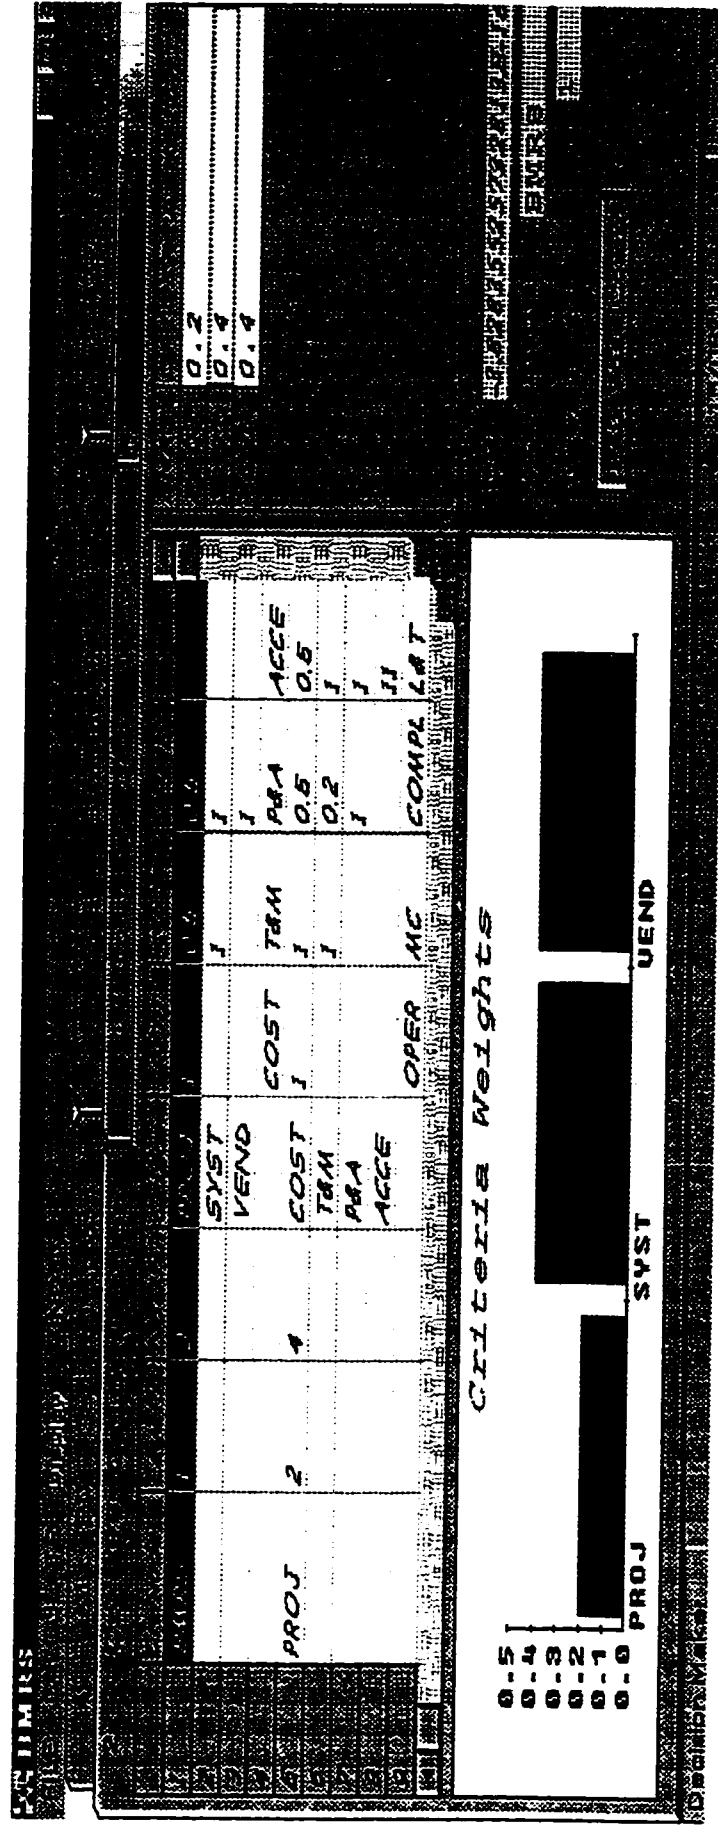


Figure 7.4- Judgments and Priorities of the Model's Main Criteria with respect to the Main Objective.

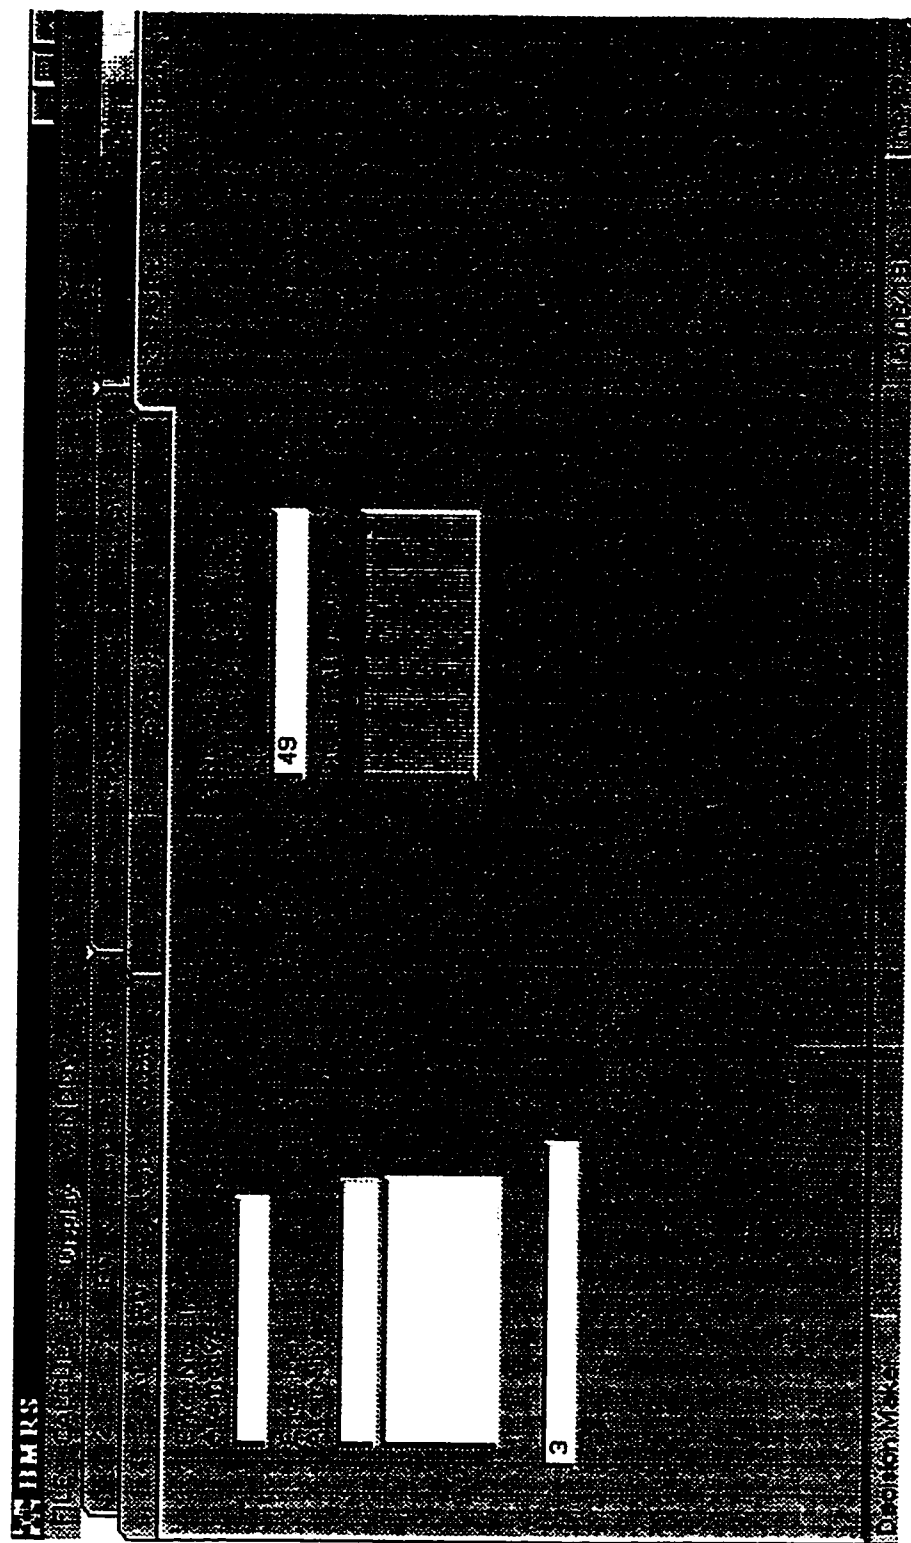
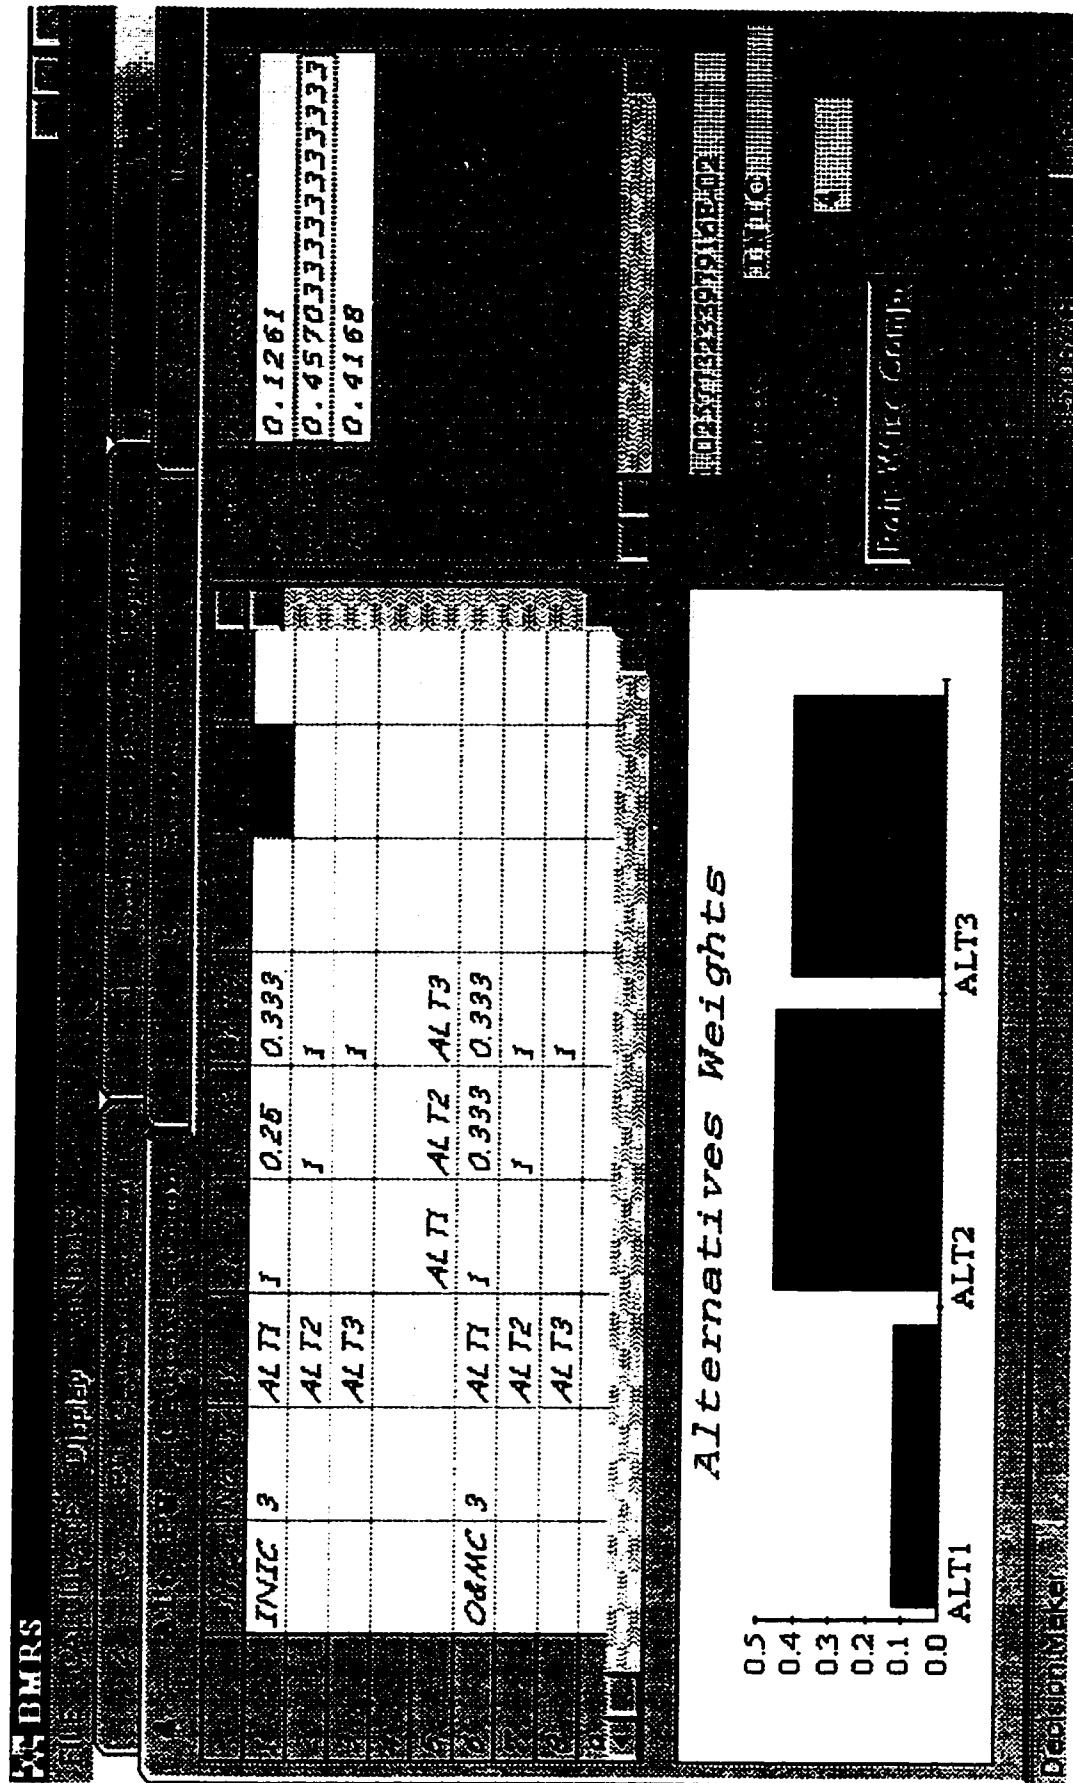


Figure 7.5 – Alternatives Initial Input Data



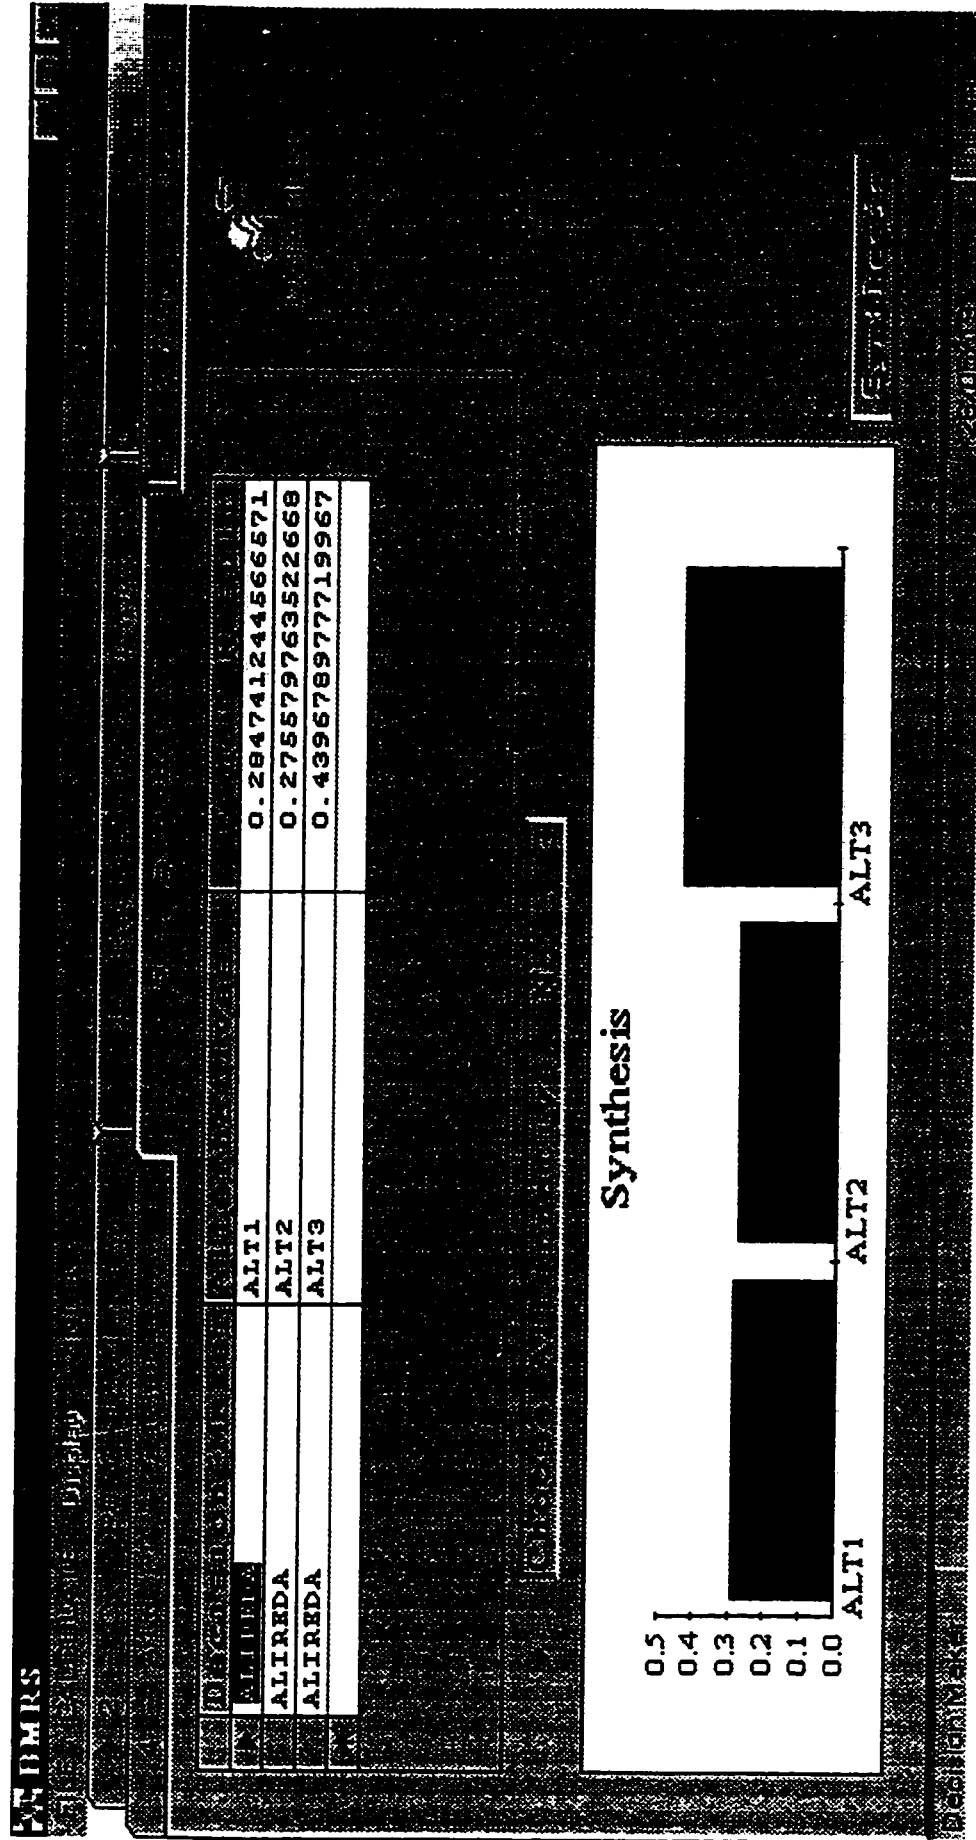


Figure 7.7 – Synthesis – Final Results



## **CHAPTER EIGHT**

### **SUMMARY, CONCLUSION & RECOMMENDATION**

#### **8.1 SUMMARY**

Oil and Gas companies like other industrial companies desire to stay ahead of their competitors. They seek to maintain their competitiveness and increase their profitability in order to survive the future. To do so, companies must initiate and implement investment projects to increase production, improve quality, enhance performance or minimize production costs. The initial feasibility of such an investment must be determined at an earlier stage of the project. Conducting the initial feasibility studies usually requires the determination or selection of the best alternative for any investment project. This can be accomplished by the use of multi-Criteria decision making approach that considers the tangible and intangible decision Criteria.

In this research a Computerized Multiple Criteria Decision-Making Model based on the AHP methodology was developed. This model was applied to rank telecommunications project alternatives for a major oil and gas company in the region. The ranking of the project alternatives will focus management attention on the best alternative and permit them to proceed with implementation confident of the success of the project.

The model was programmed in Visual basic and the data files are automatically saved in Microsoft Access. The program is user friendly and provides the user with the ability to change the evaluation scale. It does not restrict the user to certain decision factors. The user has the freedom to list any factors that he/ she thinks are appropriate to any decision-making situation.

## **8.2 CONCLUSION**

The developed computerized model gives the user a structured and systematic decision making approach for evaluating and selecting project alternatives. Additionally, this model can be used throughout the phases of the project. The areas in which this model can be applied include but, are not limited to:

1. Preliminary Engineering Phase to:
  - Determine the initial feasibility of project alternatives.
  - Evaluate technology alternatives.
2. Contract Development and Bidding Phase to:
  - Perform contractors' pre-qualification.
  - Evaluate technical bids.
3. Evaluation Phase of the Value Engineering Phase.

The application and the use of this decision making approach is straightforward. However, the difficulty lies in the construction of the decision hierarchy which depends mainly on the decision-maker's experience.

## **8.3 RECOMMENDATIONS FOR FUTURE RESEARCH**

Additional research on the developed Computerized Multiple Criteria Decision-Making Model should be conducted. This can include application of this model on other aspects of project management such as the areas mentioned above.

It is recommended that this computerized model should be developed further to be part of an expert system that includes all the criteria that influence the various

decisions for all aspects of the project. It should be noted that the developed model in this research is based on a deterministic approach to decision making. It does not consider uncertainties. Therefore, it is recommended that future research incorporate such uncertainties.

## ***APPENDIX A***

### ***Survey & Survey Results***

**TO** : PARTICPANTS

**DATE** : NOVEMBER 22, 1997

**SUBJECT** : **Research Topic:** *Multiple Criteria Decision Making For Evaluating Telecommunications Project Alternatives*

Dear Sir:

A study is being conducted on decision making in the area of projects planning and evaluation. The purpose of the study is to develop a computerized Multiple Criteria Decision-Making (MCDM) model for evaluating project alternatives in terms of criteria that are crucial to the owner (proponent) and to the success of the project.

Enclosed to this letter is a questionnaire for this study. The objective of this questionnaire is to seek your opinion about the criteria (factors) that are essential for evaluating telecommunications projects alternatives.

The list of evaluation criteria is attached to this letter. Your input is required to determine if the list is inclusive or if there are any other criteria that need to be added. Additionally, the impact of each factor on the overall decision based on a scale of 1 to 9 is required. The following table explains the meaning of each point on the scale.

<i>Scale points</i>	<i>Description</i>
9	<i>Absolutely important</i>
7	<i>Very strongly important</i>
5	<i>Strongly important</i>
3	<i>Weakly important</i>
1	<i>Less important</i>
2,4,6,8	<i>Intermediate values, for example, a value of 8 means that the degree of importance is between very strongly important which is (7) and absolutely important which is (9).</i>

Your input to this questionnaire will lead to a better understanding of the criteria that influence the decision for selecting the best alternative among many project alternatives.

Your assistance is kindly requested to complete this questionnaire by no later than November 24, 1997. An accurate and thorough response will improve telecommunication projects planning and implementation.

Please note that only your input will be utilized in the study. Any information pertaining to your name or position will be kept confidential. Your assistance in this effort will be highly appreciated. For further information on this subject, please call me on 862-2980.

**ALIREDA A. AL—JAROUDI**

---



## 120

[illegible]

## 121

[illegible]



[illegible]

## **CRITERIA THAT INFLUENCE THE DECISION MAKING PROCESS FOR EVALUATING TELECOMMUNICATIONS PROJECTS ALTERNATIVES**

PROJECTING TELECOMMUNICATIONS PROJECTS ALTERNATIVES	
• By Project Management Team (PMT)	
• End User	
• By End User	
• By Public	
• By Government	
<b>20. Permits</b>	
• Equipment Importation Permits	
• Land Use Permit	
<b>21. Vendor Support</b>	
• Warranties	
• On-Site Maintenance	
• Consulting	
• Documentation	
• Hot-Line Support	
• User Training	
<b>22. Waivers:</b> As an example, the system owner might ask for a waiver in order to employ a non-standard bandwidth configuration for a microwave system for special uses.	



# SURVEY RESULTS

Project Cost:	Initial Cost	Operating and Maintenance Cost	Allocation and Replication Costs	Leasing Cost	De-Commissioning Cost	System Upgrade Cost	Project Location	Ownership and Control	System Life: Technological Life	Working Life	Economic Life	Technology	Ease of Migration	System Features: Mandatory Features	Optional Feature	Ease of Protection During Failure	Compatibility	Reliability	Availability	System Security	Equipment Dimension	Equipment Weight	Physical Configuration and Appearance
Sum	163.0	149.0	121.0	107.0	73.0	119.0	122.0	158.0	163.0	155.0	164.0	162.0	141.0	173.0	92.0	154.0	171.0	159.0	166.0	130.0	89.0	75.0	75.0
Mean	7.087	6.4783	5.2609	4.6522	3.1739	5.1739	5.3043	6.8696	7.087	6.7391	7.1304	7.0435	6.1304	7.5217	4	6.6957	7.4348	6.913	7.2174	5.6522	3.8696	3.2609	3.2609

VARIANCE	2.949	4.1626	2.8015	4.3138	4.4045	3.3611	6.2987	2.3743	1.2098	1.6711	1.5047	3.259	3.4178	3.8147	3.5652	3.603	3.0284	1.6446	2.6919	3.3573	3.4178	3.4972	2.6276
SD	1.7173	2.0402	1.6738	2.077	2.0987	1.8333	2.5097	1.5409	1.0999	1.2927	1.2267	1.8053	1.8487	1.9531	1.9882	1.9982	1.7402	1.2824	1.6407	1.8323	1.8487	1.8701	1.621



## ***APPENDIX B***

### ***Program Codes Listing***

```

Option Base 1
Dim arrayn() As Variant
Dim xl As Object
Dim xR As Integer
Dim GI As Integer
Dim mChrt As Chart
Dim ARRAYM() As Variant
Dim Marray() As Double
Dim VARNAME() As Variant
Dim Y As Double
Dim x As Integer
Dim X10 As Integer
Dim T1 As Integer
Dim TotalCr As Integer
Dim NoOfCriteria As Integer
Dim NoOfAlternative As Integer
Dim AMatrix() As Double
Dim R As Integer
Dim C As Integer
Dim g0 As Long
Dim s0 As Long
Dim G As Long
Dim S As Long
Dim s1 As Long
Dim s2 As Long
Dim s3 As Long
Dim g1 As Long
Dim g2 As Long
Dim g3 As Long
Dim Cr As Long
Dim AI As Long
Dim Grpname As Variant
Dim inptval As String
Dim inptval00 As Integer
Dim inptval000 As Integer
Dim inptval0 As String
Dim inptval11 As String
Dim Sgrname As String
Dim Pok As Boolean
Dim ncr0 As String
Dim db As Database
Dim rsGroup As Recordset
Dim rsSub As Recordset
Dim rsCrt As Recordset
Dim rsAlt As Recordset
Dim rsCnm As Recordset
Dim rsAnm As Recordset
Dim rsRnd As Recordset
Dim rsSynthesis As Recordset
Dim rsTEMP As Recordset
Dim rsC As Recordset
Dim rsMC As Recordset
Dim rssC1 As Recordset
Dim ARRAY19() As Variant
Sub AddGroup()
Dim G As Integer
Dim S As Integer
Set db = OpenDatabase(App.Path & "\ " & "AlirEzaM.mdb")
Set rsGroup = db.OpenRecordset("Groups")
TSQ1 = "DELETE FROM GROUPS WHERE LEN(GROUPS.NAME)=0 OR ISNULL(GROUPS.[GROUP ID])"
db.Execute TSQ1, dbFailOnError
Set rsTEMP = db.OpenRecordset("Select Max(Groups.[Group ID]) as Gmax From Groups;")
If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then

```

```

        G = 1
    Else
        G = rsTEMP("Gmax") + 1
    End If
    Set rsTEMP = Nothing
    Set rsTEMP = db.OpenRecordset("Select Max(Groups.[SubGroupID]) as Smax from Groups;")
    If IsNull(rsTEMP!smax) Or Len(rsTEMP!smax) = 0 Then
        S = 1
    Else
        S = rsTEMP("smax") + 1
    End If

    rsGroup.AddNew
    rsGroup("Group ID") = G
    rsGroup("SubGroupID") = S
    rsGroup("Name") = Grpname
    rsGroup.Update

    db.Close

End Sub

Sub AddSubGroup()
    'On Error Resume Next

    Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")
    Set rsSub = db.OpenRecordset("SubGroup")
    Tsql = "Delete from Groups where len(Groups.Name)=0 or isnull(Groups.[Group ID])"
    db.Execute Tsql, dbFailOnError

    Set rsTEMP = db.OpenRecordset("Select Max(Groups.[Group ID]) as Gmax From Groups;")
    G = rsTEMP!Gmax
    Set rsTEMP = Nothing
    Set rsTEMP = db.OpenRecordset("Select Max(Groups.[SubGroupID]) as Smax from Groups;")
    S = rsTEMP("smax")
    Set rsTEMP = Nothing
    Set rsTEMP = db.OpenRecordset("Select Max(SubGroup.[CID]) as Cmax From SubGroup;")
    If IsNull(rsTEMP!cmax) Then
        Cr = 1
    Else
        Cr = rsTEMP!cmax + 1
    End If
    Set rsTEMP = Nothing
    Set rsTEMP = db.OpenRecordset("Select Max(SubGroup.[AID]) as Amax From SubGroup;")
    If IsNull(rsTEMP!Amax) Then
        AI = 1
    Else
        AI = rsTEMP!Amax + 1
    End If

    rsSub.AddNew
    rsSub("GID") = G
    rsSub("SID") = S
    rsSub("No_Of_Criteria") = NoOfCriteria
    rsSub("No_Of_Alternative") = NoOfAlternative
    rsSub("CID") = Cr
    rsSub("AID") = AI

    rsSub("Name") = Sgrname
    'If IsNull(Sgrname) Then
    If rsSub("Name") = "" Then
        ' MsgBox "Enter Decision Maker Name"
    End If

```



```

    rsSub("Name") = "NO - Name"
End If
rsSub.Update

db.Close
' If rsSub("Name") = "" Then
'   MsgBox "Enter Decision Maker Name"
' End If
End Sub

Sub AltAnormal()

    Dim Value As Double, Temp As Double
    ReDim AMatrix(NoOfAlternative)
    Dim x As Integer, C As Integer, R As Integer
    grdAnormal.Rows = NoOfAlternative + 1
    x = 1
    For C = 1 To NoOfAlternative

        Value = 0#
        For R = 1 To NoOfAlternative

            grdAnormal.Row = R
            grdAnormal.Col = C
            Temp = CDbl(grdAnormal.Text)
            Value = Value + Temp * Val(grdAnormal.Text)
        Next R

        AMatrix(C) = Value
    Next C
    For C = 1 To NoOfAlternative

        For R = 1 To NoOfAlternative

            grdAnormal.Col = C
            grdAnormal.Row = R
            grdAnormal.Text = Format(Val(grdAnormal.Text) / AMatrix(C), "##0.0000")
        Next R

    Next C

End Sub

Sub AltComparison()

    On Error GoTo GETOUT

    Dim value1 As Double
    Dim value2 As Double
    Dim value3 As Double
    Dim x As Integer
    Dim C As Integer
    Dim R As Integer
    NoOfAlternative = txtNoOfAlternatives.Text
    x = 0

    For C = 1 To NoOfAlternative
        x = x + 1
        For R = x To NoOfAlternative
            grdAlter.Row = C
            grdAlter.Col = C
            value1 = Format(grdAlter.Text, "#0.00")
            grdAlter.Row = C
            grdAlter.Col = R

```

```

        value2 = Format(grdAlter.Text, "#0.00")
        grdAlter.Row = R
        grdAlter.Col = C
        value3 = value1 / value2
        grdAlter.Text = value3
    Next R
Next C

AltFillGrids
AltAnormal
AltWeight
AltWeight1
AltConsistency
Exit Sub
GETOUT:
MsgBox "Check The Pair Values In The Grid.", vbCritical, "PairWise Calculation"
Exit Sub

End Sub
Sub AltConsistency()

    Dim R As Integer
    Dim C As Integer
    Dim Value As Double
    Dim Temp As Double
    Value = 0#

    For R = 1 To NoOfAlternative

        For C = 1 To NoOfAlternative

            grdAlter.Row = R
            grdAlter.Col = C
            grdAweight1.Row = C
            grdAweight1.Col = 1
            Temp = (grdAlter.Text * grdAweight1.Text)
            Value = Value + Temp
        Next C
        grdAcons.Row = 1
        grdAcons.Col = R
        grdAcons.Text = Value
        Value = 0#
    Next R

End Sub

Sub AltFillGrids()

    Dim C As Integer
    Dim R As Integer

    For C = 1 To NoOfAlternative
        grdAlter.Col = C
        grdAnormal.Col = C
        grdAltBak.Col = C

        For R = 1 To NoOfAlternative
            grdAlter.Row = R
            grdAnormal.Row = R
            grdAltBak.Row = R
            grdAnormal.Text = grdAlter.Text
            grdAltBak.Text = grdAlter.Text
        Next R
    Next C

```

```

Next C

End Sub

Sub AltWeight()

    Dim R As Integer
    Dim C As Integer
    ReDim AMatrix(NoOfAlternative)
    Dim Value As Double, Temp As Double
    Dim x As Integer
    Value = 0#

    For R = 1 To NoOfAlternative

        For C = 1 To NoOfAlternative
            grdAnormal.Row = R
            grdAnormal.Col = C
            Temp = Format(grdAnormal.Text, "#0.0000")
            Value = Format((Value + Temp), "#0.0000")
        Next C

        AMatrix(R) = Value
        Value = 0#

    Next R

    For R = 1 To NoOfAlternative

        grdAweight.Col = nLindex + 1
        grdAweight.Row = R
        grdAweight.Text = Format(AMatrix(R), "#0.0000") / NoOfAlternative

    Next R

End Sub

Sub Anormal()

    Dim Value As Double
    ReDim MATRIX(NoOfCriteria)
    Dim x As Integer, C As Integer, R As Integer
    grdpnormal.Rows = NoOfCriteria + 1
    x = 1
    For C = 1 To NoOfCriteria

        Value = 0#
        For R = 1 To NoOfCriteria

            grdpnormal.Row = R
            grdpnormal.Col = C
            Value = Value + Val(grdpnormal.Text)

        Next R

        MATRIX(C) = Value
    Next C
    For C = 1 To NoOfCriteria

        For R = 1 To NoOfCriteria

            grdpnormal.Col = C

```

```

        grdpnormal.Row = R
        grdpnormal.Text = Format(Val(grdpnormal.Text) / MATRIX(C), "#0.0000")
    Next R

Next C

End Sub

Sub ConsIndex()
    'On Error GoTo GETOUT
    On Error Resume Next
    '-----
    Dim R As Integer
    Dim C As Integer
    Dim Value As Double, Temp As Double
    Dim RI As Double
    Dim Msg As String
    Value = 0#
    Temp = 0#

    'For R = 1 To NoOfCriteria

        grdpweight.Col = 1
        grdpcons.Row = 1
        For C = 1 To NoOfCriteria

            grdpweight.Row = C
            grdpcons.Col = C
            Temp = grdpcons.Text / grdpweight.Text
            Value = Value + Temp

        Next C

    Next R
    Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")
    Set rsRnd = db.OpenRecordset("RandomIndex")
    rsRnd.Index = "RID"
    rsRnd.Seek "=", NoOfCriteria
    RI = rsRnd("Rindex")

    Msg = ""
    Value = Value / NoOfCriteria
    Temp = (Value - NoOfCriteria) / (NoOfCriteria - 1)
    Label10 = Temp / RI
    '-----

    Msg = Msg & Chr(13) & "Lambda Max = " & Format(Value, "###0.0000")
    Msg = Msg & Chr(13) & "Consistency Index = " & Format(Temp, "###0.0000")

    Msg = Msg & Chr(13) & "Random Index= " & RI
    Msg = Msg & Chr(13) & "CI/RI = " & Format((Temp / RI), "###0.0000")

    If (Temp / RI) < 0.1 Then
        Msg = Msg & Chr(13) & "Degree of Consistency Is Satisfactory"
    Else
        Msg = Msg & Chr(13) & "Degree of Consistency Is Not Satisfactory"
    End If

    inptval11 = MsgBox(Msg, vbOKCancel)
    'Text1 = Temp / RI

    'RETVALUE = MsgBox(" Do you require any further Calculations", vbYesNo)

```

```

If inptval11 = vbOK Then

FileSave1
'X10 = X10 + 1
'L = L + 1

End If

If inptval11 = vbCancel Then

MsgBox "Repeat Your Calculation"

Exit Sub
End If

End Sub

Sub Consistency()

Dim R As Integer
Dim C As Integer
Dim Value As Double
Dim Temp As Double
Value = 0#

For R = 1 To NoOfCriteria

For C = 1 To NoOfCriteria

grdpair.Row = R
grdpair.Col = C
grdpweight.Row = C
grdpweight.Col = 1
Temp = (grdpair.Text * grdpweight.Text)
Value = Value + Temp
Next C
grdpcons.Row = 1
grdpcons.Col = R
grdpcons.Text = Value
Value = 0#
Next R

End Sub

Sub FillGrids()
Dim C As Integer
Dim R As Integer

For C = 1 To NoOfCriteria
grdpair.Col = C
grdpnormal.Col = C
grdPairBak.Col = C

For R = 1 To NoOfCriteria
grdpair.Row = R
grdpnormal.Row = R
grdPairBak.Row = R
grdpnormal.Text = grdpair.Text
grdPairBak.Text = grdpair.Text
Next R
Next C

```

End Sub

Sub PairWiseComparision()  
On Error GoTo GExOUT

```

Dim value1 As Double
Dim value2 As Double
Dim value3 As Double
Dim x As Integer
Dim C As Integer
Dim R As Integer
NoOfCriteria = txtNoOfCriteria.Text
x = 0

For C = 1 To NoOfCriteria
    x = x + 1
    For R = x To NoOfCriteria
        grdpair.Row = C
        grdpair.Col = C
        value1 = Format(grdpair.Text, "#.0000")
        grdpair.Row = C
        grdpair.Col = R
        value2 = Format(grdpair.Text, "#.0000")
        grdpair.Row = R
        grdpair.Col = C
        value3 = value1 / value2
        grdpair.Text = value3
    Next R
Next C

```

```

FillGrids
Anormal
Weight
Consistency
Exit Sub

```

GExOUT:

```

MsgBox "Check The Pair Values In The Grid.", vbCritical, "PairWise Calculation"
Exit Sub

```

End Sub

Sub Synthesis()

```

' NoOfCrAlt = NoOfCrAlt.Text
Dim TOT() As Double
ReDim TOT(NoOfAlternative) As Double
Dim NoCA As Integer
Dim NoAl As Integer
Dim R As Integer
Dim C As Integer
Dim value1 As Double
Dim value2 As Double
Dim v As Double
Dim x As String

```

---

```

NoCA = NoOfCrAlt
NoAl = NoOfAlternative
For R = 1 To NoAl
    v = 0#
    value1 = 0#
    value2 = 0#
    TOT(R) = 0#
    For C = 1 To NoCA

```

---

```

Grid2.Col = R
Grid2.Row = C
value1 = Grid2.Text

```

---

```

    TOT(R) = value1 + TOT(R)
Next C
Next R

grdSynthesis.Cols = NoOfAlternative + 1

For C = 1 To NoOfAlternative

    grdSynthesis.Row = 1
    grdSynthesis.Col = C
    grdSynthesis.Text = TOT(C)
Next C
value1 = TOT(1)
For C = 1 To NoOfAlternative

    If value1 > TOT(C) Then
        Else
            value1 = TOT(C)
            R = C
        End If
    Next C
    lblsynthesis.Caption = "Choose Alternative No : " & R
    Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")

    Set rsSynthesis = db.OpenRecordset("Synthesis")

    For R = 1 To NoAl
        rsSynthesis.AddNew
        rsSynthesis("GID") = G
        rsSynthesis("SID") = S
        lstAlternatives.ListIndex = R - 1
        rsSynthesis("Alternatives") = lstAlternatives.Text
        grdSynthesis.Row = 1
        grdSynthesis.Col = C
        rsSynthesis("Final Result") = grdSynthesis.Text
        rsSynthesis("Result") = value1
        rsSynthesis("Message") = lblsynthesis.Caption
        rsSynthesis.Update
    Next R

db.Close

End Sub

Sub Weight()

    Dim R As Integer
    Dim C As Integer
    ReDim MATRIX(NoOfCriteria)
    ReDim MATRIX1(NoOfCriteria)
    Dim Value As Double, Temp As Double
    Dim x As Integer
    Dim Y As Double
    Value = 0#

    x = 1

    For R = 1 To NoOfCriteria

```

```

For C = 1 To NoOfCriteria
    grdpnormal.Row = R
    grdpnormal.Col = C
    ' Temp = Format(grdpnormal.Text, "fixed ")
    ' Value = Format((Value + Temp), "fixed ")
    Temp = Format(grdpnormal.Text, "#0.0000 ")
    Value = Format((Value + Temp), "#0.0000")
Next C

MATRIX(R) = Value
' MATRIX1(R) = value * Y
Value = 0#
x = x + 1
Next R

For R = 1 To NoOfCriteria

    grdpweight.Col = 1
    grdpweight.Row = R
    grdpweight.Text = Format(MATRIX(R), "#0.0000") / NoOfCriteria

Next R

End Sub

Private Sub AboutDeciMaker_Click()

Frmabout9.Show

End Sub

Private Sub ADDCAL_Click()
Dim I As Integer
Dim frm As Object

Set frm = New frmdecision

cp = InputBox("Caption")

frm.Caption = cp

frm.Show
End Sub

Private Sub ALtList_KeyPress(KeyAscii As Integer)
' KeyAscii = Asc(UCase(Chr(KeyAscii)))
If KeyAscii = 13 Then
    If Len(Trim(ALtList.Text)) > 0 Then
        ' 'Istcriteria.AddItem UCase(txtCriteria.Text)
        Istcritiabak.AddItem UCase(ALtList.Text)
        ALtList.Text = " "
    End If
End If
End Sub

Private Sub ALtList_LostFocus()
Dim I As Integer
Dim CHARACTER As String
For I = 1 To Len(ALtList.Text)
If (CHARACTER < "A" Or CHARACTER > "Z") And (CHARACTER < "0" Or CHARACTER > "9") Then

```



```

Beep
AltList.SetFocus
Exit For
End If
Next I

End Sub

Private Sub Alternatives_Change()
SSCommand2.Visible = True
GrdInAltDat1.Visible = False
End Sub

Private Sub Alternatives_KeyPress(KeyAscii As Integer)
If KeyAscii = 13 Then
    If Len(Trim(Alternatives.Text)) > 0 Then
        AlternativesList.AddItem UCase(Alternatives.Text)

        Alternatives.Text = ""

    End If
End If

End Sub

Private Sub AlternativesList_DblClick()
AlternativesList.Clear
End Sub

Private Sub AltPWCalculation_Click()
'cmdAlternative.TOOLTIPTEXT = SSS
Dim a As Integer
Dim x As Integer

GrdInAltDat1.Col = 4
For I = 1 To NoOfAlternative
    For R = 1 To NoOfAlternative

        grdAlter.Col = R
        grdAlter.Row = I
        grdAlter.Text = GrdInAltDat1.Text
        GrdInAltDat1.Col = 4 + R
    Next R
    GrdInAltDat1.Row = GrdInAltDat1.Row + 1
Next I

    If Not IsNumeric(txtNoOfLevels.Text) Then
        MsgBox "Please Enter Numebr of Levels"
        txtNoOfLevels = 3
    End If

    a = txtNoOfLevels

    grdAlter.Col = 0
    grdAlter.Row = 0
    If IsNull(grdAlter.Text) Or Len(Trim(grdAlter.Text)) = 0 Then
        MsgBox "Select Criteria for This Alternative.", vbCritical, "Alternative"
    End If
    Exit Sub
End If

If nCriteria = 0 Then
    sCriteria = lstcritriabak.Text
    'sCriteria = Label1(10).Caption
    nCriteria = nCriteria + 1

```

```

        x = lstcritriabak.ListIndex
        ' x = Label1(10).Caption
        nLIndex = x + 1 + nLIndex
        lstcritriabak.RemoveItem x
    'End If

    AltComparision
    AltConsisIndex

    PlotAltData

End Sub

Private Sub chartdisplay_Click()

    ReloadData
    CreatChart
    xl.Application.Quit
    Set xl = Nothing
    Exit Sub

End Sub

Private Sub cmdAGridHead_Click()
    Dim x As Integer
    x = lstAlternatives.ListCount
    If x <> NoOfAlternative Then
        MsgBox "No. Of Alternatives Does Not Match The Alternative Count. ", vbCritical, "Test Project"
    Exit Sub
    End If

    For I = 0 To x - 1
        grdAlter.Row = I + 1
        grdAlter.Col = 0
        grdAnormal.Row = I + 1
        grdAnormal.Col = 0
        grdAltBak.Row = I + 1
        grdAltBak.Col = 0
        lstAlternatives.ListIndex = I
        grdAlter.Text = lstAlternatives.Text
        grdAnormal.Text = lstAlternatives.Text
        grdAltBak.Text = lstAlternatives.Text
    Next
    For I = 0 To x - 1
        grdAlter.Col = I + 1
        grdAlter.Row = 0
        grdAnormal.Col = I + 1
        grdAnormal.Row = 0
        grdAltBak.Col = I + 1
        grdAltBak.Row = 0
        lstAlternatives.ListIndex = I
        grdAlter.Text = lstAlternatives.Text
        grdAnormal.Text = lstAlternatives.Text
        grdAltBak.Text = lstAlternatives.Text
    Next
    For I = 0 To x - 1
        grdAweight.Row = I + 1
        grdAweight.Col = 0
        lstAlternatives.ListIndex = I
        grdAweight.Text = lstAlternatives.Text
    Next I
    For I = 0 To x - 1

```

```

        grdAcons.Row = 0
        grdAcons.Col = I + 1
        lstAlternatives.ListIndex = I
        grdAcons.Text = lstAlternatives.Text
    Next I

End Sub

Private Sub cmdAltAdd_Click()
    If NoOfCrAlt = 0 Or IsNull(NoOfCrAlt) Then Exit Sub
    AddAlternatives
End Sub

Private Sub Cmbtype2_Click()
    Dim sel2 As String
    sel2 = Cmbtype2.Text
    Select Case sel2

        Case "2D-Bar"
            Graph2.GraphType = gphBar2D

        Case "2D-Pie"
            Graph2.GraphType = gphPie2D

        Case "3D-Bar"
            Graph2.GraphType = gphBar3D

        Case "3D-Pie"
            Graph2.GraphType = gphPie3D

        Case "Area"
            Graph2.GraphType = gphArea

        Case "Gantt"
            Graph2.GraphType = gphGantt

        Case "HLC"
            Graph2.GraphType = gphHLC

        Case "Line"
            Graph2.GraphType = gphLine

        Case "Polar"
            Graph2.GraphType = gphPolar

        Case "SCATTER"
            Graph2.GraphType = gphScatter
        Case Else
            Graph2.GraphType = gphLine
    End Select
    Graph2.DrawMode = 2
    Cmbtype2.Visible = False
End Sub

Private Sub Cmbtype_Click()
    Dim sel As String
    sel = Cmbtype.Text
    Select Case sel
        Case "3D-Bar"
            Graph1.GraphType = gphBar3D
        Case "2D-Bar"
            Graph1.GraphType = gphBar2D
        Case "2D-Pie"

```

```

Graph1.GraphType = gphPie2D
Case "3D-Pie"
Graph1.GraphType = gphPie3D
Case "Line"
Graph1.GraphType = gphLine
Case "Area"
Graph1.GraphType = gphArea
Case "Gantt"
Graph1.GraphType = gphGantt
' Case "Log/Lin"
' Graph1.GraphType = gphlog / Lin
Case "Polar"
Graph1.GraphType = gphPolar
Case "HLC"
Graph1.GraphType = gphHLC
Case "SCATTER"
Graph1.GraphType = gphScatter
Case Else
Graph1.GraphType = gphLine
End Select
Graph1.DrawMode = 2
Cmbtype.Visible = False
End Sub

```

```

Private Sub Cmbtype3_Click()
Dim sel3 As String
sel3 = Cmbtype3.Text
Select Case sel3
Case "2D-Bar"
Graph3.GraphType = gphBar2D

Case "2D-Pie"
Graph3.GraphType = gphPie2D

Case "3D-Bar"
Graph3.GraphType = gphBar3D

Case "3D-Pie"
Graph3.GraphType = gphPie3D

Case "Area"
Graph3.GraphType = gphArea

Case "Gantt"
Graph3.GraphType = gphGantt

Case "HLC"
Graph3.GraphType = gphHLC

Case "Line"
Graph3.GraphType = gphLine

Case "Polar"
Graph3.GraphType = gphPolar

Case "SCATTER"
Graph3.GraphType = gphScatter
Case Else
Graph3.GraphType = gphLine
End Select

Graph3.DrawMode = 2
Cmbtype3.Visible = False

```

```

End Sub

Private Sub cmdAlternative_Click()
    'cmdAlternative.TOOLTIPTEXT = SSS
    Dim a As Integer
    Dim x As Integer

    GrdInAltDat1.Col = 4
    For I = 1 To NoOfAlternative
        For R = 1 To NoOfAlternative

            grdAlter.Col = R
            grdAlter.Row = I
            grdAlter.Text = GrdInAltDat1.Text
            GrdInAltDat1.Col = 4 + R
        Next R
        GrdInAltDat1.Row = GrdInAltDat1.Row + 1
    Next I

    If Not IsNumeric(txtNoOfLevels.Text) Then
        MsgBox "Please Enter Numebr of Levels"
        txtNoOfLevels = 3
    End If

    a = txtNoOfLevels

    grdAlter.Col = 0
    grdAlter.Row = 0
    If IsNull(grdAlter.Text) Or Len(Trim(grdAlter.Text)) = 0 Then
        MsgBox "Select Criteria for This Alternative.", vbCritical, "Alternative"
        Exit Sub
    End If
    If nCriteria = 0 Then
        sCriteria = lstcritriabak.Text
        'sCriteria = Label1(10).Caption
        nCriteria = nCriteria + 1
        x = lstcritriabak.ListIndex
        'x = Label1(10).Caption
        nLIndex = x + 1 + nLIndex
        'lstcritriabak.RemoveItem x
    End If

    AltComparision
    AltConsisIndex
    ' If NoOfCrAlt = 0 Or IsNull(NoOfCrAlt) Then Exit Sub
    'AddAlternatives

    PlotAltData

End Sub

Private Sub cmdExit_Click()
    Unload Me
End Sub

Private Sub Command2_Click()
    If MSFlexGrid1.GridLinesFixed < 3 Then
        MSFlexGrid1.GridLinesFixed = MSFlexGrid1.GridLines + 1
    Else
        MSFlexGrid1.GridLinesFixed = 0
    End If
End Sub

```

```

Private Sub Command1_Click()
If MSFlexGrid1.GridLines < 3 Then
MSFlexGrid1.GridLines = MSFlexGrid1.GridLines + 1
Else
MSFlexGrid1.GridLines = 0
End If
End Sub

```

```

Sub Command44_Click()
Dim I As Integer
Dim NOcr As Integer

NOcr = 4 * NoOfCriteria.Text
Dim snglnew(4) As Single
Graph1.GraphTitle = "Criteria Weights"

```

```

Graph1.NumPoints = 4
Graph1.ThisPoint = 1
Graph1.AutoInc = 1
For I = 1 To 4
snglnew(4) = Rnd(1) * I + 1
grdpweight.Col = I
grdpweight.Row = I

Graph1.GraphData = grdpweight.Text

```

```

'lstcriteria.ListIndex = i - 1
'Graph1.LabelText = lstcriteria
Next I
For I = 1 To 4
snglnew(4) = Rnd(1) * I + 1
grdpweight.Col = 0
grdpweight.Row = I

```

```

Graph1.LabelText = grdpweight.Text

```

```

Graph1.DrawMode = 2

```

```

Next I

```

```

End Sub

```

```

Private Sub CrInData_Click()

```

```

Dim DM As Variant
Dim MO As Variant
Dim DM1 As Variant
Dim MO1 As Variant

```

```

On Error Resume Next

```

```

'-----
GridInputData.Visible = True
GrdInAltDat1.Visible = True

```

```

'-----
DecisonMakerName.Text = ""
MainObjective.Text = ""
txtNoOfLevels.Text = ""
NoOfCrNode.Text = ""

```

```

lstrCriteria.Clear
list1.Clear
ListCRALT.Clear
text2.Text = ""
Text4.Text = ""
LstCrNodes.Clear
LstLevels.Clear
NoOfCrList.Clear
AlternativesList.Clear
ListCRALT.Clear
NoOfCrAlt.Text = ""
txtCriteriaAlt.Text = ""
'-----

'-----

'SSCommand3.Visible = False
tabDecision.TabEnabled(0) = True
tabDecision.TabEnabled(3) = True
tabDecision.TabEnabled(4) = True
tabDecision.TabEnabled(5) = True

'-----

Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rsAltIn = db.OpenRecordset("AlternativesInput")

Set rsLCANo = db.OpenRecordset("LevCrAltNo")
FN = InputBox("File Name?")

rsLCANo.Index = "FileName"
rsLCANo.Seek "=", FN

If rsLCANo.NoMatch = True Then

MsgBox "File Does Not Exist "
'End

Else

RetrievCRALTNO
CRDataRetrieve
AltDataRetrieve

End If

End Sub

Private Sub CrNodeName_Change()
SSCommand3.Visible = True
GridInputData.Visible = False
lstrCriteria.Clear
list1.Clear
ListCRALT.Clear

End Sub

Private Sub CrNodeName1_KeyPress(KeyAscii As Integer)
If KeyAscii = 13 Then
If Len(Trim(CrNodeName1.Text)) > 0 Then
LstCrNodes.AddItem UCase(CrNodeName1.Text)

CrNodeName1.Text = ""

```

```

        End If
    End If

End Sub

Private Sub CrNodeName1_LostFocus()
    CrNodeName1 = CrNodeName1.Text
End Sub

Private Sub CrNodeName1_GotFocus()
    CrNodeName1.Text = ""
End Sub

Private Sub CrNodeName_KeyPress(KeyAscii As Integer)
    If KeyAscii = 13 Then
        If Len(Trim(CrNodeName.Text)) > 0 Then
            LstCrNodes.AddItem UCase(CrNodeName.Text)
            ' LstCRALT.AddItem UCase(txtCriteriaAlt.Text)
            CrNodeName.Text = ""
        End If
    End If
End Sub

Private Sub DecisonMakerName_KeyPress(KeyAscii As Integer)

    Sgrname = DecisonMakerName.Text
    If KeyAscii = 13 Then
        SendKeys "{TAB}", True
    End If

End Sub

Private Sub DISPLAYOTHERTBS_Click()
    tabDecision.TabEnabled(1) = True
    tabDecision.TabEnabled(2) = True
    tabDecision.TabEnabled(4) = True
    tabDecision.TabEnabled(5) = True
End Sub

Private Sub Filenew_Click()

    Dim I As Integer
    Dim frm As Object

    Set frm = New frmdecision
    cp = InputBox("Caption")
    frm.Caption = cp
    frm.Show

End Sub

Private Sub filexit_Click()
    Unload Me
End Sub

Private Sub Form_Load()

    tabDecision.TabEnabled(0) = False
    tabDecision.TabEnabled(1) = True

```



```
tabDecision.TabEnabled(2) = True
```

```
tabDecision.TabEnabled(3) = False
```

```
tabDecision.TabEnabled(4) = False
```

```
tabDecision.TabEnabled(5) = False
```

```
GrdHeadInDat
```

```
Graph1.Visible = False
```

```
Graph2.Visible = False
```

```
Graph3.Visible = False
```

```
GrdInAltDat1.Visible = False
```

```
GridInputData.Visible = False
```

```
'-----
```

```
Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")
```

```
Set rsGroup = db.OpenRecordset("Groups")
```

```
Set rsSub = db.OpenRecordset("SubGroup")
```

```
Set rsMC = db.OpenRecordset("MAINCR")
```

```
Set rSsc2 = db.OpenRecordset("SubCr2")
```

```
Set rsSC3 = db.OpenRecordset("SubCr3")
```

```
Set rsSC4 = db.OpenRecordset("SubCr4")
```

```
Set rsACW2 = db.OpenRecordset("AltCrWeight2")
```

```
Set rsACW3 = db.OpenRecordset("AltCrWeight3")
```

```
Set rsACW4 = db.OpenRecordset("AltCrWeight4")
```

```
Set rsACW5 = db.OpenRecordset("AltCrWeight5")
```

```
Set rsSynthesis = db.OpenRecordset("Synthesis")
```

```
Do Until rsGroup.EOF
```

```
    rsGroup.Delete
```

```
    rsGroup.MoveNext
```

```
Loop
```

```
Do Until rsSub.EOF
```

```
    rsSub.Delete
```

```
    rsSub.MoveNext
```

```
Loop
```

```
Do Until rsMC.EOF
```

```
    rsMC.Delete
```

```
    rsMC.MoveNext
```

```
Loop
```

```
Do Until rSsc2.EOF
```

```
    rSsc2.Delete
```

```
    rSsc2.MoveNext
```

```
Loop
```

```
Do Until rsSC3.EOF
```

```
    rsSC3.Delete
```

```
    rsSC3.MoveNext
```

```
Loop
```

```
Do Until rsSC4.EOF
```

```
    rsSC4.Delete
```

```
    rsSC4.MoveNext
```

```
Loop
```

---

Decision Maker Programming Codes

Novemehr 1998

```
Do Until rsACW2.EOF
```

```
    rsACW2.Delete
```

```
    rsACW2.MoveNext
```

```
Loop
```

```
Do Until rsACW3.EOF
```

```
    rsACW3.Delete
```

```
    rsACW3.MoveNext
```

```
Loop
```

```
Do Until rsACW4.EOF
```

```
    rsACW4.Delete
```

```
    rsACW4.MoveNext
```

```
Loop
```

```
Do Until rsACW5.EOF
```

```
    rsACW5.Delete
```

```
    rsACW5.MoveNext
```

```
Loop
```

```
Do Until rsSynthesis.EOF
```

```
,
```

```
    rsSynthesis.Delete
```

```
    rsSynthesis.MoveNext
```

```
Loop
```

```
End Sub
```

```
Private Sub formprint_Click()
```

```
    PrintForm
```

```
End Sub
```

```
Private Sub grdAlter_KeyDown(KeyCode As Integer, Shift As Integer)
```

```
    For I = grdAlter.SelStartCol To grdAlter.SelEndCol
```

```
        grdAlter.ColWidth(I) = 600
```

```
    Next I
```

```
End Sub
```

```
Private Sub grdAlter_KeyPress(KeyAscii As Integer)
```

```
    If KeyAscii = 13 Then
```

```
        grdAlter.Text = Format(grdAlter.Text, "#.0")
```

```
        SendKeys "{RIGHT}", True
```

```
        Exit Sub
```

```
    End If
```

```
    If KeyAscii = 8 Then
```

```
        If Len(Trim(grdAlter.Text)) > 0 Then
```

```
            grdAlter.Text = Mid(grdAlter.Text, 1, Len(grdAlter.Text) - 1)
```

```
        End If
```

```

Exit Sub
End If

grdAlter.Text = grdAlter.Text & Chr(KeyAscii)

End Sub

Private Sub grdAweight1_DblClick()
grdAweight1.Col = 1
grdAweight1.Row = 0
grdAweight1.Text = "ALTERNATIVES WEIGHT"

For I = grdAweight1.SelStartCol To grdAweight1.SelEndCol

    grdAweight1.ColWidth(I) = 4000

Next I
End Sub

Private Sub GrdInAltDat1_DblClick()

On Error Resume Next
On Error GoTo GETOUT

GrdInAltDat1.Col = 1
grdAlter.Col = 0
grdAlter.Row = 0
grdAlter.Text = UCase(GrdInAltDat1.Text)
txtCriteriaAlt.Text = UCase(GrdInAltDat1.Text)
Label1(10).Caption = UCase(grdAlter.Text)
grdAweight1.Col = 0
grdAweight1.Row = 0

grdAweight1.Text = UCase(GrdInAltDat1.Text)

'-----
GrdInAltDat1.Col = 2

txtNoOfAlternatives = GrdInAltDat1.Text

If IsNull(txtNoOfAlternatives.Text) = True Or Len(Trim(txtNoOfAlternatives.Text)) = 0 Then
Else
    grdAlter.Cols = txtNoOfAlternatives.Text + 1
    grdAlter.Rows = txtNoOfAlternatives.Text + 1
    grdAweight1.Rows = txtNoOfAlternatives + 1
    grdAweight1.Cols = txtNoOfAlternatives + 1
    grdAnormal.Cols = txtNoOfAlternatives.Text + 1
    grdAnormal.Rows = txtNoOfAlternatives.Text + 1
    grdAltBak.Cols = txtNoOfAlternatives.Text + 1
    grdAltBak.Rows = txtNoOfAlternatives.Text + 1
    grdAweight.Rows = txtNoOfAlternatives + 1

    grdAweight.Cols = NoOfCrAlt + 1
    grdAcons.Cols = txtNoOfAlternatives + 1

    NoOfAlternative = txtNoOfAlternatives.Text
End If
nCriteria = 0

```

```

For R = 1 To NoOfAlternative
    GrdInAltDat1.Col = 3
    'GrdInAltDat1.Row = 1
    grdAlter.Col = 0
    grdAlter.Row = R

    grdAlter.Text = UCase(GrdInAltDat1.Text)
    grdAweight1.Col = 0
    grdAweight1.Row = R

    grdAweight1.Text = UCase(grdAlter.Text) * UCase(grdAlter.Text)
    'GridAltData.Row = 2
    grdAweight.Col = 0
    grdAweight.Row = R
    grdAweight.Text = UCase(grdAweight1.Text)
    'txtAlternatives = GridAltData.Text
    grdAlter.Row = 0
    grdAlter.Col = R
    grdAlter.Text = UCase(grdAweight.Text)

    '-----

    GrdInAltDat1.Col = 3 + R
    GrdInAltDat1.Row = GrdInAltDat1.Row - R
    GrdInAltDat1.Text = UCase(grdAlter.Text)

    GrdInAltDat1.Row = GrdInAltDat1.Row + R
    GrdInAltDat1.Row = GrdInAltDat1.Row + 1

    '-----

Next R

I = 1
    For I = GrdInAltDat1.SelStartCol To GrdInAltDat1.SelEndCol

        GrdInAltDat1.ColWidth(I) = 600

    Next I

    GrdInAltDat1.Visible = True

End Sub

Private Sub GrdInAltDat1_KeyPress(KeyAscii As Integer)
    Dim I As Integer

    If KeyAscii = 13 Then
        GrdInAltDat1.Text = Format(GrdInAltDat1.Text, "#.00000")
        SendKeys "{RIGHT}", True
        Exit Sub
    End If
    If KeyAscii = 8 Then
        If Len(Trim(GrdInAltDat1.Text)) > 0 Then
            GrdInAltDat1.Text = Mid(GrdInAltDat1.Text, 1, Len(GrdInAltDat1.Text) - 1)
        End If
        Exit Sub
    End If

    '-----

    I = 1
        For I = GrdInAltDat1.SelStartCol To GrdInAltDat1.SelEndCol

            GrdInAltDat1.ColWidth(I) = 800

```

```

        Next I
    
```

---

```

        GrdInAltDat1.Text = GrdInAltDat1.Text & Chr(KeyAscii)
    End Sub

Private Sub grdpair_KeyDown(KeyCode As Integer, Shift As Integer)
    For I = grdpair.SelStartCol To grdpair.SelEndCol

        grdpair.ColWidth(I) = 600

    Next I
End Sub

Private Sub grdPair_KeyPress(KeyAscii As Integer)

    If KeyAscii = 13 Then
        grdpair.Text = Format(grdpair.Text, "#0.0")
        SendKeys "{RIGHT}", True
        Exit Sub
    End If
    If KeyAscii = 8 Then
        If Len(Trim(grdpair.Text)) > 0 Then
            grdpair.Text = Mid(grdpair.Text, 1, Len(grdpair.Text) - 1)
        End If
        Exit Sub
    End If

    grdpair.Text = grdpair.Text & Chr(KeyAscii)

End Sub

Private Sub grdpweight_DblClick()
    grdpweight.Col = 1
    grdpweight.Row = 0
    grdpweight.Text = "CRITERIA WEIGHT"

    For I = grdpweight.SelStartCol To grdpweight.SelEndCol

        grdpweight.ColWidth(I) = 4000

    Next I
End Sub

Private Sub Grid4_Click()
    For I = GridInputData.SelStartCol To GridInputData.SelEndCol

        GridInputData.ColWidth(I) = 830

    Next I
End Sub

Private Sub Grid4_DblClick()
    Dim R As Integer
    GridAltData.Row = 1
    GridAltData.Col = 1

```

```

grdAlter.Col = 0
grdAlter.Row = 0
grdAlter.Text = GridAltData.Text
GridAltData.Row = 2
GridAltData.Col = 1

    lstcritriabak.ListIndex = R - 1
    lstcritriabak.AddItem UCase(GridAltData.Text)
    ListCRALT.AddItem UCase(GridAltData.Text)

GridAltData.Col = 3
GridAltData.Row = 1
txtNoOfAlternatives = GridAltData.Text
GridAltData.Col = 3
GridAltData.Row = 2
txtalternatives = GridAltData.Text
'-----

If IsNull(txtNoOfAlternatives.Text) = True Or Len(Trim(txtNoOfAlternatives.Text)) = 0 Then
Else
    grdAlter.Cols = txtNoOfAlternatives.Text + 1
    grdAlter.Rows = txtNoOfAlternatives.Text + 1
    grdAnormal.Cols = txtNoOfAlternatives.Text + 1
    grdAnormal.Rows = txtNoOfAlternatives.Text + 1
    grdAltBak.Cols = txtNoOfAlternatives.Text + 1
    grdAltBak.Rows = txtNoOfAlternatives.Text + 1
    grdAweight.Rows = txtNoOfAlternatives + 1
    'grdAweight.Cols = txtNoOfCriteria + 1
    'grdAweight.Cols = NoOfCrAlt + 1
    'grdAcons.Cols = txtNoOfAlternatives + 1
    lstAlternatives.Clear
    'lstcritriabak.Clear' THIS PROGRAMMING CODE IS FROM EFORE

    NoOfAlternative = txtNoOfAlternatives.Text
End If
nCriteria = 0

End Sub

Private Sub Grid4_KeyPress(KeyAscii As Integer)
Dim I As Integer

If KeyAscii = 13 Then
    GridInputData.Text = Format(GridInputData.Text, "#.00000")
    SendKeys "{RIGHT}", True
    Exit Sub
End If
If KeyAscii = 8 Then
    If Len(Trim(GridInputData.Text)) > 0 Then
        GridInputData.Text = Mid(GridInputData.Text, 1, Len(GridInputData.Text) - 1)
    End If
    Exit Sub
End If
'-----

I = 1
For I = GridInputData.SelStartCol To GridInputData.SelEndCol

    GridInputData.ColWidth(I) = 830

Next I
'-----

GridInputData.Text = GridInputData.Text & Chr(KeyAscii)

```

```

End Sub

Private Sub Grid3_DblClick()
    GrdInAltDat1.Col = 1
    grdAlter.Col = 0
    grdAlter.Row = 0
    grdAlter.Text = UCase(GrdInAltDat1.Text)
    txtCriteriaAlt.Text = UCase(GrdInAltDat1.Text)
    Label1(10).Caption = UCase(grdAlter.Text)
    grdAweight1.Col = 0
    grdAweight1.Row = 0

    grdAweight1.Text = UCase(GrdInAltDat1.Text)

    ListCRALT.AddItem UCase(grdAlter.Text)
    txtCriteriaAlt.Text = ""

    '-----

    GrdInAltDat1.Col = 2
    'GridAltData.Row = 1
    txtNoOfAlternatives = GrdInAltDat1.Text

    '-----

If IsNull(txtNoOfAlternatives.Text) = True Or Len(Trim(txtNoOfAlternatives.Text)) = 0 Then
Else
    grdAlter.Cols = txtNoOfAlternatives.Text + 1
    grdAlter.Rows = txtNoOfAlternatives.Text + 1
    grdAweight1.Rows = txtNoOfAlternatives + 1
    grdAweight1.Cols = txtNoOfAlternatives + 1
    grdAnormal.Cols = txtNoOfAlternatives.Text + 1
    grdAnormal.Rows = txtNoOfAlternatives.Text + 1
    grdAltBak.Cols = txtNoOfAlternatives.Text + 1
    grdAltBak.Rows = txtNoOfAlternatives.Text + 1
    grdAweight.Rows = txtNoOfAlternatives + 1

    grdAweight.Cols = NoOfCrAlt + 1
    grdAcons.Cols = txtNoOfAlternatives + 1
    lstAlternatives.Clear
    'lstcritriabak.Clear' THIS PROGRAMMING CODE IS FROM EFORE

    NoOfAlternative = txtNoOfAlternatives.Text
End If
nCriteria = 0

For R = 1 To NoOfAlternative
    GrdInAltDat1.Col = 3
    'GrdInAltDat1.Row = 1
    grdAlter.Col = 0
    grdAlter.Row = R
    grdAweight1.Col = 0
    grdAweight1.Row = R

    grdAlter.Text = UCase(GrdInAltDat1.Text)
    grdAweight1.Text = UCase(grdAlter.Text)
    'GridAltData.Row = 2
    grdAweight.Col = 0
    grdAweight.Row = R
    grdAweight.Text = UCase(grdAweight1.Text)
    'txtalternatives = GridAltData.Text
    grdAlter.Row = 0
    grdAlter.Col = R
    grdAlter.Text = UCase(GrdInAltDat1.Text)

```

---

```

GrdInAltDat1.Col = 3 + R
GrdInAltDat1.Row = GrdInAltDat1.Row - R
GrdInAltDat1.Text = UCase(grdAlter.Text) & lstcriteria.Text

```

```

GrdInAltDat1.Row = GrdInAltDat1.Row + R
GrdInAltDat1.Row = GrdInAltDat1.Row + 1
'GrdInAltDat1.Row = R

```

---

```

Next R

```

```

I = 1
For I = GrdInAltDat1.SelStartCol To GrdInAltDat1.SelEndCol

    GrdInAltDat1.ColWidth(I) = 1000

Next I
End Sub

```

```

Private Sub grdSynthesis_DblClick()
For I = grdSynthesis.SelStartCol To grdSynthesis.SelEndCol

    grdSynthesis.ColWidth(I) = 2000
Next I
End Sub

```

```

Private Sub GridInputData_DblClick()
Dim R As Integer

```

```

On Error Resume Next

```

```

GridInputData.Col = 1

```

```

grdpair.Col = 0
grdpair.Row = 0
GridInputData.Text = UCase(GridInputData.Text)
grdpair.Text = GridInputData.Text
grdpweight.Col = 0
grdpweight.Row = 0
grdpweight.Text = GridInputData.Text
Label4(0).Caption = GridInputData.Text

```

```

Grpname = grdpair.Text
GridInputData.Col = 3
txtNoOfCriteria = GridInputData.Text

```

```

If IsNull(txtNoOfCriteria.Text) = True Or Len(Trim(txtNoOfCriteria.Text)) = 0 Then
Else
    grdpair.Cols = txtNoOfCriteria.Text + 1
    grdpair.Rows = txtNoOfCriteria.Text + 1
    grdpnormal.Cols = txtNoOfCriteria.Text + 1
    grdpnormal.Rows = txtNoOfCriteria.Text + 1
    grdpairbak.Cols = txtNoOfCriteria.Text + 1
    grdpairbak.Rows = txtNoOfCriteria.Text + 1
    grdpweight.Rows = txtNoOfCriteria + 1
    grdpcons.Cols = txtNoOfCriteria + 1
    lstcriteria.Clear

```



```

        NoOfCriteria = txtNoOfCriteria.Text
    End If
'-----
    GridInputData.Col = 2
    lablevel(1).Caption = GridInputData.Text
    lablevel(2).Caption = lablevel(1).Caption + 1

    For R = 1 To NoOfCriteria

        GridInputData.Col = 4

        grdpair.Col = 0
        grdpair.Row = R
        grdpweight.Row = R
        grdpweight.Col = 0
        GridInputData.Text = UCase(GridInputData.Text)
        grdpair.Text = GridInputData.Text
        grdpweight.Text = grdpair.Text
        lstcriteria.AddItem UCase(grdpair.Text)
        grdpair.Row = 0
        grdpair.Col = R
        grdpair.Text = GridInputData.Text

    '-----
        GridInputData.Col = 4 + R
        GridInputData.Row = GridInputData.Row - R
        GridInputData.Text = UCase(grdpair.Text) lstcriteria.Text
        GridInputData.Row = GridInputData.Row + R
        GridInputData.Row = GridInputData.Row + 1

    Next R

    GridInputData.Visible = True
    SSCommand3.Visible = False
End Sub

Private Sub GridInputData_KeyPress(KeyAscii As Integer)
    Dim I As Integer

    If KeyAscii = 13 Then
        GridInputData.Text = Format(GridInputData.Text, "#0.00000")
        SendKeys "{RIGHT}", True
        Exit Sub
    End If
    If KeyAscii = 8 Then
        If Len(Trim(GridInputData.Text)) > 0 Then
            GridInputData.Text = Mid(GridInputData.Text, 1, Len(GridInputData.Text) - 1)
        End If
        Exit Sub
    End If
'-----
    I = 1
    For I = GridInputData.SelStartCol To GridInputData.SelEndCol

        GridInputData.ColWidth(I) = 800

    Next I
'-----

    GridInputData.Text = GridInputData.Text & Chr(KeyAscii)

```

End Sub

```
Private Sub LevelNo_Change()
SSCommand3.Visible = True
GridInputData.Visible = False
End Sub
```

```
Private Sub LevelNo_KeyPress(KeyAscii As Integer)
LevelNo = LevelNo.Text

If KeyAscii = 13 Then
If Len(Trim(LevelNo.Text)) > 0 Then
LstLevels.AddItem UCase(LevelNo.Text)
' LstCRALT.AddItem UCase(txtCriteriaAlt.Text)
LevelNo.Text = ""

End If
End If

End Sub
```

```
Private Sub LevelNo_LostFocus()
velNo = LevelNo.Text
If Not IsNumeric(LevelNo.Text) Then
MsgBox "Please Enter a Level Numebr"
LevelNo = LevelNo.Text
End If
End Sub
```

```
Private Sub list1_DbClick()
list1.Clear
End Sub
```

```
Private Sub ListCRALT_DbClick()
ListCRALT.Clear
End Sub
```

```
Private Sub Istcriteria_DbClick()
Istcriteria.Clear
list1.Clear
ListCRALT.Clear
End Sub
```

```
Private Sub Istcritriabak_Click()

Label1(10).Caption = Istcritriabak.Text
' Label1(10).Caption = ALtLis.Text
End Sub
```

```
Private Sub LstCrNodes_DbClick()
LstCrNodes.Clear
End Sub
```

```
Private Sub LstLevels_DbClick()
LstLevels.Clear
End Sub
```

```
Private Sub MainObjective_KeyPress(KeyAscii As Integer)

If KeyAscii = 13 Then
SendKeys "{TAB}", True
End If
```

```

    inptval = MainObjective.Text

    If Len(inptval) = 0 Then
        MsgBox "Try Again"

    End If
End Sub

Private Sub NoCrNodes_KeyPress(KeyAscii As Integer)
    If KeyAscii = 13 Then

        SendKeys "{TAB}", True
    End If
End Sub

Private Sub NoCrNodes_LostFocus()
    If IsNull(NoCrNodes.Text) = True Or Len(Trim(NoCrNodes.Text)) = 0 Then
        Else

            NoCrNodes = NoCrNodes.Text

        End If
    End Sub

Private Sub NoCrList_DbClick()
    NoCrList.Clear
End Sub

Private Sub NoOfCrAlt_Change()
    SSCommand2.Visible = True
    GrdInAltDat1.Visible = False
End Sub

Private Sub NoOfCrNode_Change()
    SSCommand3.Visible = True
    GridInputData.Visible = False
    lstcriteria.Clear
    list1.Clear
    ListCRALT.Clear

End Sub

Private Sub NoOfCrNode_KeyPress(KeyAscii As Integer)
    If KeyAscii = 13 Then

        SendKeys "{TAB}", True
    End If
    NoOfCrNode = NoOfCrNode.Text
End Sub

Private Sub NoOfCrNode_LostFocus()

If Not IsNumeric(NoOfCrNode.Text) Then

```

```

        MsgBox "Please Enter Numebr of Criteria Nodes"
        NoOfCrNode = 0
    End If

    If (NoOfCrNode.Text) = 0 Then
        MsgBox "Please Enter Numebr of Criteria Nodes"
        ' NoOfCrNode = 1
    End If

    If IsNull(NoOfCrNode.Text) = True Or Len(Trim(NoOfCrNode.Text)) = 0 Then

        Else
        '
            LstCrNodes.Clear
            ' ListCRALT.Clear
            NoOfCrNode = NoOfCrNode.Text
        End If
    End Sub

    Private Sub PairWC_Click()

        'GREADHEAD1
        Dim x As Integer
        Dim L As Integer
        Dim R As Integer

        '-----ENTER DATA FOR COL 5+ -----

        GridInputData.Col = 5

        For R = 1 To NoOfCriteria

            For I = 1 To NoOfCriteria
            '
                grdpair.Row = R
                grdpair.Col = I
                grdpair.Text = GridInputData.Text
                GridInputData.Col = I + 5 'GridInputData.Col + 1
            Next I
            GridInputData.Row = GridInputData.Row + 1

        Next R

        '---END OF ENETERING DATA-----

        If NoOfCriteria = 0 Or IsNull(NoOfCriteria) Then Exit Sub
        PairWiseComparision
        ConsIndex
        PlotData

    End Sub

    Private Sub PAIRWISECOMP_Click()

        'GREADHEAD1
        Dim x As Integer
        Dim L As Integer
        Dim R As Integer

```

```

'-----ENTER DATA FOR COL 5+ -----

GridInputData.Col = 5

For R = 1 To NoOfCriteria

  For I = 1 To NoOfCriteria
  ,
    grdpair.Row = R
    grdpair.Col = I
    grdpair.Text = GridInputData.Text
    GridInputData.Col = I + 5 'GridInputData.Col + 1
  Next I
  GridInputData.Row = GridInputData.Row + 1

Next R

'-----END OF ENETERING DATA-----

If NoOfCriteria = 0 Or IsNull(NoOfCriteria) Then Exit Sub
PairWiseComparision
ConsIndex
PlotData

End Sub

Private Sub SaveIn_Click()
' SaveIn.Enabled = False
SaveCrInput
SaveAltInput
SaveCrAltNodeLeNo

End Sub

Private Sub SSCmdSynthesis_Click()
On Error Resume Next

SynthesisF

Data2.Refresh
PlotDataSynthesis
Graph3.Visible = True
DispDatInExcel.Enabled = True
End Sub

Private Sub Text3_Change()
If KeyAscii = 13 Then
  Istcriteria.Clear
  Istcritriabak.Clear
  SendKeys "{TAB}", True
End If
End Sub

Private Sub SSCommand4_Click()
Dim I As Integer
GrdInAltDat1.Col = 3
For I = 1 To NoOfAlternative
  For R = 1 To NoOfAlternative

    grdAlter.Col = R
    grdAlter.Row = I

```

```

    GrdInAltDat1.Text = GrdInAltDat1.Text
    GrdInAltDat1.Col = 3 + R
    Next R
    GrdInAltDat1.Row = GrdInAltDat1.Row + 1
Next I
End Sub

Private Sub SSCommand111_Click()
    If KeyAscii = 13 Then
        If Len(Trim(txtCriteria.Text)) > 0 Then
            lstCriteria.AddItem UCase(txtCriteria.Text)
            lst1.AddItem UCase(txtCriteria.Text)
            ListCRALT.AddItem UCase(txtCriteria.Text)

            txtCriteria.Text = ""

        End If

        End If

        tabDecision.TabEnabled(0) = True

        tabDecision.TabEnabled(3) = True
        tabDecision.TabEnabled(4) = True
        tabDecision.TabEnabled(5) = True
    End Sub

Private Sub SSCommand2_Click()
    Dim DD As String
    Dim YY As Integer
    Dim R2 As Integer
    Dim F1 As Integer
    On Error GoTo GEtOUT
    GrdInAltDat1.Visible = True

    Text4.Text = NoOfAlternative

    SaveIn.Enabled = True
    For R = 1 To 30
        For R1 = 1 To 999
            GrdInAltDat1.Col = R
            GrdInAltDat1.Row = R1
            GrdInAltDat1.Text = ""
        Next R1
    Next R

    F1 = 1
    GrdInAltDat1.Col = 1
    GrdInAltDat1.Row = 1

    R = 1

    ListCRALT.ListIndex = R - 1
    GrdInAltDat1.Text = ListCRALT.Text
    GrdInAltDat1.Text =

    For I = 1 To NoOfCrAlt - 1
        F1 = (NoOfAlternative + 1) + F1
        F1 = (NoOfAlternative + 2) + F1
        GrdInAltDat1.Row = F1

        GrdInAltDat1.Row = (NoOfAlternative * I) + (2 * I) + 1
        ListCRALT.ListIndex = I - 1
        GrdInAltDat1.Text = ListCRALT.Text

```

```

Next I

GrdInAltDat1.Col = 2
GrdInAltDat1.Row = 1

GrdInAltDat1.Text = txtNoOfAlternatives
For I = 1 To NoOfCrAlt - 1

'F1 = (NoOfAlternative + 2) + F1
'GrdInAltDat1.Row = F1

GrdInAltDat1.Row = (NoOfAlternative * I) + (2 * I) + 1

GrdInAltDat1.Text = txtNoOfAlternatives
Next I

GrdInAltDat1.Col = 3

For R = 1 To NoOfAlternative
    GrdInAltDat1.Row = R
    AlternativesList.ListIndex = R - 1
    GrdInAltDat1.Text = AlternativesList.Text
Next R

For R = 1 To NoOfCrAlt - 1
    C = R * NoOfAlternative + (2 * R)

    For R1 = 1 To NoOfAlternative
        GrdInAltDat1.Row = C + R1 - 1
        AlternativesList.ListIndex = R1 - 1

        GrdInAltDat1.Text = AlternativesList.Text
    Next R1

Next R

GETOUT:

Msg = Msg & Chr(13) & "Are you Sure Your Data is Correc"

DD = MsgBox(Msg, vbOKCancel)
If DD <> vbOK Then
    MsgBox "Try Again"
End If

SSCommand2.Visible = False

End Sub

Private Sub SSCommand3_Click()
Dim YY, YY1, SS As String
Dim DD As Boolean
Dim S As Integer

On Error Resume Next
SSCommand3.Visible = False

```

```
GridInputData.Visible = True
For R = 1 To 30
```

```
  For R1 = 1 To 100
    GridInputData.Col = R
    GridInputData.Row = R1
    GridInputData.Text = ""
  Next R1
Next R
```

```
'-----Criteria Input-----
```

```
T1 = 0
x = 1
C = 1
C4 = 1
R1 = 1
For R = 1 To NoOfCrNode
  GridInputData.Col = 1
```

```
  GridInputData.Row = C
  LstCrNodes.ListIndex = R - 1
  GridInputData.Text = LstCrNodes.Text
  GridInputData.Col = 2
  LstLevels.ListIndex = R - 1
  GridInputData.Text = LstLevels.Text
```

```
  GridInputData.Col = 3
  NofCrList.ListIndex = R - 1
  GridInputData.Text = NofCrList.Text
  NoOfCriteria = NofCrList.Text
```

```
C = NoOfCriteria + 1 + C
```

```
T1 = T1 + NoOfCriteria
TotalCr = T1
Next R
```

```
'-----end of input 1-----
```

```
D = 1
Y0 = 1
Y = 0
DD = 0
For D = 1 To NoOfCrNode
  GridInputData.Col = 4
```

```
  NofCrList.ListIndex = D - 1
```

```
  Y = Y + NofCrList.Text
  For D1 = Y0 To Y
```

```
    GridInputData.Row = D + D1 + DD - 1
    lstcriteria.ListIndex = D1 - 1
```

```
    GridInputData.Text = lstcriteria.Text
```

```
  Next D1
  Y0 = Y + 1
```

```
Next D
```



```

'-----
w = 0
S = 0
For R1 = 1 To NoOfCrNode '- 1
  LstCrNodes.ListIndex = R1 - 1
  For R = w To TotalCr
    ListCRALT.ListIndex = R '- 1
    If ListCRALT.Text = LstCrNodes.Text Then 'YY Then
      ListCRALT.RemoveItem R '- 1
      S = S + 1
    End If
  Next R
Next R1

NoOfCrAlt = TotalCr - S
'-----
text2.Text = TotalCr

End Sub

Private Sub tabDecision_DblClick()
  Cmbtype3.Visible = False
  Cmbtype2.Visible = False
  Cmbtype.Visible = False

End Sub

Private Sub TxtLvelOfHeirachy_Click()
  If IsNull(TxtLvelOfHeirachy.Text) = True Or Len(Trim(TxtLvelOfHeirachy.Text)) = 0 Then
    inptval0 = TxtLvelOfHeirachy.Text
  End If
End Sub

Private Sub txtalternatives_GotFocus()
  txtalternatives.Text = ""
End Sub

Private Sub txtalternatives_KeyPress(KeyAscii As Integer)
  If KeyAscii = 13 Then
    If Len(Trim(txtalternatives.Text)) > 0 Then
      lstAlternatives.AddItem UCase(txtalternatives.Text)
      txtalternatives.Text = ""
    End If
  End If
End Sub

Private Sub txtCriteria3_Change()
  SSCommand3.Visible = True
  GridInputData.Visible = False
End Sub

```

```

Private Sub txtCriteria_GotFocus()
txtCriteria.Text = ""

End Sub

Private Sub txtCriteria_KeyPress(KeyAscii As Integer)

If KeyAscii = 13 Then
If Len(Trim(txtCriteria.Text)) > 0 Then
lstrCriteria.AddItem UCase(txtCriteria.Text)
list1.AddItem UCase(txtCriteria.Text)
ListCRALT.AddItem UCase(txtCriteria.Text)

txtCriteria.Text = ""

End If

End If

tabDecision.TabEnabled(0) = True

tabDecision.TabEnabled(3) = True
tabDecision.TabEnabled(4) = True
tabDecision.TabEnabled(5) = True

End Sub

Private Sub txtLevels_GotFocus()
txtLevels.Text = ""
End Sub

Private Sub txtLevels_KeyPress(KeyAscii As Integer)
If KeyAscii = 13 Then
If Len(Trim(txtLevels.Text)) > 0 Then
LstLevels.AddItem UCase(txtLevels.Text)

txtLevels.Text = ""

End If
End If

End Sub

Private Sub txtNoOfAlternatives_Change()
SSCommand2.Visible = True
GrdInAltDat1.Visible = False
End Sub

Private Sub txtNoOfAlternatives_KeyPress(KeyAscii As Integer)

If KeyAscii = 13 Then

SendKeys "{TAB}", True
End If

End Sub

Private Sub txtNoOfAlternatives_LostFocus()

```

```

If Not IsNumeric(txtNoOfAlternatives.Text) Then
    MsgBox "Please Enter a Numebr"
    txtNoOfAlternatives.Text = ""
End If

If IsNull(txtNoOfAlternatives.Text) = True Or Len(Trim(txtNoOfAlternatives.Text)) = 0 Then
    Else

        NoOfAlternative = txtNoOfAlternatives.Text
    End If
    nCriteria = 0

    If NoOfAlternative < 2 Then
        MsgBox " Are You Sure You Have Less Than Two Alternatives"
    End If
End Sub

Private Sub txtNoOfCriteria_Change()
    SSCommand3.Visible = True
    GridInputData.Visible = False
    ' lstcriteria.Clear
    ' list1.Clear
    ' ListCRALT.Clear

End Sub

Private Sub txtNoOfCriteria_KeyPress(KeyAscii As Integer)
    ,
    If KeyAscii = 13 Then
        If Len(Trim(txtNoOfCriteria)) > 0 Then
            NofCrList.AddItem UCase(txtNoOfCriteria.Text)

            txtNoOfCriteria.Text = ""

        End If
    End If

    ' NoOfCriteria = txtNoOfCriteria.Text
End Sub

Public Sub AddMCweight1()
    Dim I As Integer

    Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")

    Set rsMC = db.OpenRecordset("MainCr")

    For R = 1 To NoOfCriteria

        rsMC.AddNew
        ' rsMC("MCID") = gl
        rsMC("GID") = G
        rsMC("SID") = S

        grdpweight.Col = 1
        grdpweight.Row = R

        rsMC("NAME") = Grpname
        rsMC("MCValue") = grdpweight.Text
    ,

```

```

GridInputData.Col = 4
GridInputData.Row = R
rsMC("MCName") = GridInputData.Text

rsMC.Update

Next R

db.Close

End Sub

Public Sub ADDSCWEIGHT4()

Dim V2 As Double
Dim V3 As Double
Dim V4 As Double
Dim Z As Variant
Dim v5 As Variant

Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")

Set rsSC4 = db.OpenRecordset("SubCr4")
Set rsSC3 = db.OpenRecordset("SubCr3")

For R = 1 To NoOfCriteria

rsSC4.AddNew

rsSC4("GID") = G
rsSC4("SID") = S

grdpweight.Col = 1
grdpweight.Row = R
' Grpname = GOAL
rsSC4("NAME") = Grpname
rsSC4("SC4Value") = grdpweight.Text
'-----New Operation Here-----

J = 1
Do Until rsSC3.EOF

If rsSC4("NAME") = rsSC3("SC3NAME") Then
'v1 = RSSC2("sC2VALUE")

V2 = rsSC3("SC3 Value")
Z = rsSC3("MCName")
V3 = rsSC3("MC Value")
V4 = rsSC3("GVALUE")
v5 = rsSC3("Name")
Text4.Text = v5
Text2.Text = Z
J = 1 + J
End If
rsSC3.MoveNext
Loop
'-----End Of Instruction for that Operation-----
rsSC4("Gvalue") = V2

```

```

'-----
    grdpair.Col = 0
    grdpair.Row = R
    rsSC4("SC4Name") = grdpair.Text
'-----

    1stcriteria.ListIndex = R - 1
    'rsSC4("SC4Name") = 1stcriteria.Text
    rsSC4("SC2NAME") = v5 Text4.Text
    rsSC4("SC2Value") = V4
    rsSC4("MCName") = Z Text2.Text
    rsSC4("MCValue") = V3
    rsSC4("COValue") = rsSC4("MCValue") * rsSC4("SC2Value") * rsSC4("GVALUE") * rsSC4("SC4VALUE")
    rsSC4.Update

Next R

    db.Close
End Sub

Public Sub ADDSCWEIGHT2()
Dim I As Integer

Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")

Set rSsc2 = db.OpenRecordset("SubCr2")

Set rsMC = db.OpenRecordset("MAINCR")

For R = 1 To NoOfCriteria

    rSsc2.AddNew

    rSsc2("GID") = G
    rSsc2("SID") = S

    grdpweight.Col = 1
    grdpweight.Row = R
    rSsc2("NAME") = Grpname
    rSsc2("SC2 Value") = grdpweight.Text

'-----Here The Program Will Retrieve The Weight For The Criteria Group Head-----
    J = 1
    Do Until rsMC.EOF

        If rSsc2("NAME") = rsMC("MCNAME") Then
            'v1 = RSsc2("SC2VALUE")
            V2 = rsMC("MCVALUE")
            J = 1 + J
        End If
        rsMC.MoveNext
    Loop

'-----End Of Instruction for that Operation-----
    rSsc2("GVALUE") = V2
    rSsc2("COVALUE") = rSsc2("GVALUE") * rSsc2("SC2VALUE")
'-----

    grdpair.Col = 0
    grdpair.Row = R
    rSsc2("SC2Name") = grdpair.Text

```

```

        rSsc2.Update

    Next R

    db.Close
End Sub

Public Sub ADDSCWEIGHT3()

    Dim V3 As Double
    Dim Z As Variant
    Dim V2 As Double
    Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")

    Set rsSC3 = db.OpenRecordset("SubCr3")
    Set rSsc2 = db.OpenRecordset("SubCr2")

    For R = 1 To NoOfCriteria

        rsSC3.AddNew

        rsSC3("GID") = G
        rsSC3("SID") = S

        grdpweight.Col = 1
        grdpweight.Row = R

        rsSC3("NAME") = Grpname
        rsSC3("SC3Value") = grdpweight.Text
        '-----NEW Opetion Here-----

        J = 1
        Do Until rSsc2.EOF

            If rsSC3("NAME") = rSsc2("sc2name") Then
                'v1 = RSsc2("sC2 VALUE")
                V2 = rSsc2("SC2VALUE")
                Z = rSsc2("NAME")
                V3 = rSsc2("GVALUE")
                J = 1 + J
            End If
            rSsc2.MoveNext
        Loop
        '-----End Of Instruction for that Operation-----
        rsSC3("GVALUE") = V2

        rsSC3("MCname") = Z
        rsSC3("MCValue") = V3
        '-----

        grdpair.Col = 0
        grdpair.Row = R
        rsSC3("SC3Name") = grdpair.Text
        rsSC3("COValue") = rsSC3("GVALUE") * rsSC3("SC3VALUE") * rsSC3("MCValue")
        '-----

        'lstcriteria.ListIndex = R - 1
        'rsSC3("SC3Name") = lstcriteria.Text

        rsSC3.Update

    Next R

```

```

    db.Close
End Sub

Sub FileSave1()
    Dim CTR As Integer
    Dim Y As Double
    Dim Y1 As Double
    Dim Y2 As Double
    Dim MATRIX1() As Double
    Dim I As Integer

    inptval0 = lablevel(1).Caption
    CTR = 1

    Do While IsNull(inptval0) Or Len(Trim(inptval0)) = 0
        If CTR = 3 Then End
        MsgBox "Try Again", 48
        inptval0 = InputBox("Which Level of The Hierarchy Is This, Please Indicate 1 For The Main Criteria Level1, 2 For SuBcriteria at Level 2 and So On.")
        CTR = CTR + 1
    Loop

    ncr0 = inptval0

    AddGroup
    AddSubGroup

    If ncr0 = 1 Then
        AddMCweight1
    ElseIf ncr0 = 2 Then
        ADDSCWEIGHT2
    ElseIf ncr0 = 3 Then
        ADDSCWEIGHT3
    ElseIf ncr0 = 4 Then
        ADDSCWEIGHT4
    ElseIf ncr0 = 5 Then
        ' ADDSCWEIGHT5
    ElseIf ncr0 = 6 Then
        ' ADDSCWEIGHT6
    ElseIf ncr0 = 7 Then
        ' ADDSCWEIGHT7
    ElseIf ncr0 = 8 Then
        ' ADDSCWEIGHT8
    End If

    If ncr0 > 8 Then
        MsgBox " This exceeds the limitation of the program", vbCritical
    End If

    If (ncr0 <= 0) Then
        MsgBox " You Have Entered Wrong Information ", vbCritical
    End If
End Sub

Public Sub filenew1()

```

```

Dim ncr0 As Integer

CTR = 1
Sgname = InputBox("Enter Decision Maker Name :", "Analysis")
Do While IsNull(Sgname) Or Len(Trim(Sgname)) = 0
    If CTR = 3 Then End
    Sgname = InputBox("Enter Decision Maker Name :", "Analysis")
    CTR = CTR + 1
Loop

CTR = 1

inptval = InputBox("Enter The Main Objective")

Do While IsNull(inptval) Or Len(Trim(inptval)) = 0
    If CTR = 3 Then End
    inptval = InputBox("Enter The Criteria Group Name :", "Analysis")
    CTR = CTR + 1
Loop

'ReDim inptval1(0 To nCr) As Variant

If Len(inptval) = 0 Then
    MsgBox "Try Again"

End If

'Loop
End Sub

Public Sub GREADHEAD1()
    Dim x As Integer
    x = lstcriteria.ListCount

    For I = 0 To x - 1
        grdpair.Row = I + 1
        grdpair.Col = 0
        grdpnormal.Row = I + 1
        grdpnormal.Col = 0
        grdPairBak.Row = I + 1
        grdPairBak.Col = 0
        lstcriteria.ListIndex = I
        grdpair.Text = lstcriteria.Text
        grdpnormal.Text = lstcriteria.Text
        grdPairBak.Text = lstcriteria.Text
    Next
    For I = 0 To x - 1
        grdpair.Col = I + 1
        grdpair.Row = 0
        grdpnormal.Col = I + 1
        grdpnormal.Row = 0
        grdPairBak.Col = I + 1
        grdPairBak.Row = 0
        lstcriteria.ListIndex = I
        grdpair.Text = lstcriteria.Text
        grdpnormal.Text = lstcriteria.Text
        grdPairBak.Text = lstcriteria.Text
    Next
    For I = 0 To x - 1

```



```

        grdpweight.Row = I + 1
        grdpweight.Col = 0
        lstcriteria.ListIndex = I
        grdpweight.Text = lstcriteria.Text
    Next I
    For I = 0 To x - 1
        grdpcons.Row = 0
        grdpcons.Col = I + 1
        lstcriteria.ListIndex = I
        grdpcons.Text = lstcriteria.Text
    Next I
End Sub

Public Sub GridheadAlt()
Dim x As Integer

    For I = 0 To x - 1
        grdAlter.Row = I + 1
        grdAlter.Col = 0
        grdAnormal.Row = I + 1
        grdAnormal.Col = 0
        grdAltBak.Row = I + 1
        grdAltBak.Col = 0
        lstAlternatives.ListIndex = I
        grdAlter.Text = lstAlternatives.Text
        grdAnormal.Text = lstAlternatives.Text
        grdAltBak.Text = lstAlternatives.Text
    Next
    For I = 0 To x - 1
        grdAlter.Col = I + 1
        grdAlter.Row = 0
        grdAnormal.Col = I + 1
        grdAnormal.Row = 0
        grdAltBak.Col = I + 1
        grdAltBak.Row = 0
        lstAlternatives.ListIndex = I
        grdAlter.Text = lstAlternatives.Text
        grdAnormal.Text = lstAlternatives.Text
        grdAltBak.Text = lstAlternatives.Text
    Next
    For I = 0 To x - 1
        grdAweight.Row = I + 1
        grdAweight.Col = 0
        lstAlternatives.ListIndex = I
        grdAweight.Text = lstAlternatives.Text
    Next I
    For I = 0 To x - 1
        grdAcons.Row = 0
        grdAcons.Col = I + 1
        lstAlternatives.ListIndex = I
        grdAcons.Text = lstAlternatives.Text
    Next I

End Sub

Public Sub AltWeight1()
Dim R As Integer
Dim C As Integer
ReDim AMatrix(NoOfAlternative)
Dim Value As Double, Temp As Double
Dim x As Integer
Value = 0#

```

```

For R = 1 To NoOfAlternative
    For C = 1 To NoOfAlternative
        grdAnormal.Row = R
        grdAnormal.Col = C
        Temp = Format(grdAnormal.Text, "#0.0000")
        Value = Format((Value + Temp), "#0.0000")
    Next C

    AMatrix(R) = Value
    Value = 0#

Next R

For R = 1 To NoOfAlternative

    grdAweight1.Col = 1
    grdAweight1.Row = R
    grdAweight1.Text = Format(AMatrix(R), "#0.0000") / NoOfAlternative

Next R

End Sub

Public Sub AltAdd2()
Dim g2 As Integer
Dim Y As Double
Dim x As Double
Dim Z As Variant
Dim FF As String

Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")
Set rSsc2 = db.OpenRecordset("SubCr2")

Set rsMC = db.OpenRecordset("MAINCR")
Set rsACW2 = db.OpenRecordset("AltCrWeight2")
'----- The next programming code add the LD No. for the main Criteria.

Tsql = "Delete from AltCrWeight2 where len(AltCrWeight2.CrName)=0 or isnull(AltCrWeight2.{AltID})"
db.Execute Tsql, dbFailOnError

Set rsTEMP = db.OpenRecordset("Select Max(AltCrWeight2.{AltID}) as Gmax From AltCrWeight2;")

If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
    g2 = 1
Else
    g2 = rsTEMP("Gmax") + 1

End If

For R = 1 To NoOfAlternative

    rsACW2.AddNew

    rsACW2("AltID") = g2

    rsACW2("CrName") = Label1(10).Caption

    grdAlter.Col = R

```

```

grdAlter.Row = 0
rsACW2("AltName") = grdAlter.Text
grdAweight1.Col = 1
grdAweight1.Row = R
rsACW2("AltValue") = grdAweight1.Text

```

'—Here The Program Will Retrieve The Weight For The Criteria Group Head—————

```

J = 1
Do Until rsMC.EOF

    If rsACW2("CrName") = rsMC("MCNAME") Then

        Y = rsMC("MCVALUE")
        FF = rsMC("MCNAME")

        J = 1 + J
    End If
    rsMC.MoveNext
Loop

```

```

GRIDTEST.Col = 1
GRIDTEST.Row = R
GRIDTEST.Text = rsACW2("CrName")

```

```

GRIDTEST.Col = 2
GRIDTEST.Row = R
GRIDTEST.Text = FF

```

```

GRIDTEST.Col = 3
GRIDTEST.Row = R
GRIDTEST.Text = Y

```

'—————End Of Instruction for that Operation—————

```

rsACW2("CrValue") = Y
' rsACW2("L1CrName") = z
rsACW2("TValue") = rsACW2("CrValue") * rsACW2("AltValue")
' rsACW2("L1CrVal") = x
rsACW2.Update

```

Next R

```

db.Close
End Sub

```

```

Private Sub txtNoOfCriteria_LostFocus()

```

```

If Not IsNumeric(txtNoOfCriteria.Text) Then
    MsgBox "Please Enter Numebr of Sub-Criteria"
    txtNoOfCriteria = 0
End If
If IsNull(txtNoOfCriteria.Text) = True Or Len(Trim(txtNoOfCriteria.Text)) = 0 Then
    Else

```

```

        NoOfCriteria = txtNoOfCriteria.Text
    End If
End Sub

```

```

Private Sub txtNoOfLevels_KeyPress(KeyAscii As Integer)

```

```
If KeyAscii = 13 Then
```

```
    SendKeys "{TAB}", True
End If
```

```
txtNoOfLevels = txtNoOfLevels.Text
```

```
End Sub
```

```
Private Sub txtNoOfLevels_LostFocus()
```

```
    If IsNull(txtNoOfLevels.Text) = True Or Len(Trim(txtNoOfLevels.Text)) = 0 Then
    Else
```

```
        txtNoOfLevels = txtNoOfLevels.Text
    End If
```

```
    If Not IsNumeric(txtNoOfLevels.Text) Then
        MsgBox "Please Enter Numebr of Levels"
        txtNoOfLevels = 3
    End If
```

```
    If (txtNoOfLevels > 6) Or (txtNoOfLevels < 3) Then
        MsgBox " You Have Entered Wrong Information ", vbCritical
        'MsgBox " This exceeds the limitation of the program", vbCritical
        txtNoOfLevels.Text = 3
    End If
```

```
End Sub
```

```
Public Sub AltAdd3()
```

```
    Dim g2 As Integer
    Dim Y As Double
    Dim x As Double
    Dim Z As Variant
```

```
    Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")
    Set rSsc2 = db.OpenRecordset("SubCr2")
```

```
    Set rsMC = db.OpenRecordset("MAINCR")
    Set rsACW3 = db.OpenRecordset("AltCrWeight3")
    Dim K1, K2, K3 As Boolean
    Dim Y2 As Variant
```

```
    '----- The next programming code add the LD No. for the main Criteria.
```

```
    Tsql = "Delete from AltCrWeight3 where len(AltCrWeight3.CrName)=0 or isnull(AltCrWeight3.[AltID])"
    db.Execute Tsql, dbFailOnError
```

```
    Set rsTEMP = db.OpenRecordset("Select Max(AltCrWeight3.[AltID]) as Gmax From AltCrWeight3;")
```

```
    If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
        g2 = 1
```

```

Else
    g2 = rsTEMP("Gmax") + 1
End If

For R = 1 To NoOfAlternative

    rsACW3.AddNew
    rsACW3("AltID") = g2
    rsACW3("CrName") = Label1(10).Caption

    grdAlter.Col = R
    grdAlter.Row = 0
    rsACW3("AltName") = grdAlter.Text

    grdAweight1.Col = 1
    grdAweight1.Row = R
    rsACW3("AltValue") = grdAweight1.Text

    J = 1
    Do Until rsMC.EOF

        If rsACW3("CrName") = rsMC("MCNAME") Then
            'v1 = RSSC2("sC2VALUE")
            Y = rsMC("MCVALUE")
            Z = rsMC("MCNAME")
            K1 = True
            J = 1 + J
        End If
        rsMC.MoveNext
    Loop

    If K1 = True Then

        rsACW3("L1CrName") = Z
        rsACW3("L1CrVal") = Y
        rsACW3("CrValue") = Y
        rsACW3("TValue") = rsACW3("L1CrVal") * rsACW3("AltValue")

    End If

    J = 1
    Do Until rSsc2.EOF

        If rsACW3("CrName") = rSsc2("SC2NAME") Then
            'v1 = RSSC2("sC2VALUE")
            Y = rSsc2("SC2VALUE")
            Z = rSsc2("NAME")
            x = rSsc2("GVALUE")

            Y2 = rSsc2("SC2Name")
            K2 = True

            J = 1 + J
        End If
        rSsc2.MoveNext
    Loop
End Of Instruction for that Operation

```

```

If K2 = True Then
    'rsACW5("CrValue") = Y
    'rsACW3("L2CrVal") = Y
    rsACW3("CrValue") = Y
    rsACW3("CrName") = Y2
    'rsACW3("L2CrName") = Y2
    rsACW3("L1CrName") = Z
    rsACW3("L1CrVal") = x
    rsACW3("TValue") = rsACW3("L1CrVal") * rsACW3("CrValue") * rsACW3("AltValue")
End If

rsACW3.Update

Next R

db.Close
End Sub

Public Sub AltAdd4()
    Dim g2 As Integer
    Dim Y As Double
    Dim x As Double
    Dim Z As Variant
    Dim X1 As Double
    Dim z1 As Variant
    Dim K1, K2, K3, K4 As Boolean
    Dim Y2, Y3 As Variant

    Set db = OpenDatabase(App.Path & "\" & "Alirezam.mdb")
    Set rSsc2 = db.OpenRecordset("SubCr2")
    Set rsSC3 = db.OpenRecordset("SubCr3")
    Set rsMC = db.OpenRecordset("MAINCR")
    Set rsACW4 = db.OpenRecordset("AltCrWeight4")
    '----- The next programming code add the I.D No. for the main Criteria.

    Tsql = "Delete from AltCrWeight4 where len(AltCrWeight4.CrName)=0 or isnull(AltCrWeight4.[AltID])"
    db.Execute Tsql, dbFailOnError

    Set rsTEMP = db.OpenRecordset("Select Max(AltCrWeight4.[AltID]) as Gmax From AltCrWeight4;")

    If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
        g2 = 1
    Else
        g2 = rsTEMP("Gmax") + 1
    End If

    For R = 1 To NoOfAlternative

        rsACW4.AddNew

        rsACW4("AltID") = g2

        rsACW4("CrName") = Label1(10).Caption
        'lstAlternatives.ListIndex = R - 1
        'rsACW4("AltName") = lstAlternatives.Text
        grdAlter.Col = R
        grdAlter.Row = 0
        rsACW4("AltName") = grdAlter.Text
    
```

```

grdAweight1.Col = 1
grdAweight1.Row = R
rsACW4("AltValue") = grdAweight1.Text

```

'-----Here The Program Will Retrieve The Weight For The Criteria Group Head-----'

```

J = 1
Do Until rsMC.EOF

    If rsACW4("CrName") = rsMC("MCNAME") Then
        'v1 = RSSC2("sC2VALUE")
        Y = rsMC("MCVALUE")
        Z = rsMC("MCNAME")
        K1 = True
        J = 1 + J
    End If
    rsMC.MoveNext
Loop

'-----
If K1 = True Then

    rsACW4("L1CrName") = Z
    rsACW4("L1CrVal") = Y
    rsACW4("CrValue") = Y
    rsACW4("TValue") = rsACW4("L1CrVal") * rsACW4("AltValue")

```

End If

```

'-----
J = 1
Do Until rSsc2.EOF

    If rsACW4("CrName") = rSsc2("SC2NAME") Then
        'v1 = RSSC2("sC2VALUE")
        Y = rSsc2("SC2VALUE")
        Y2 = rSsc2("SC2Name")
        Z = rSsc2("NAME")
        x = rSsc2("GVALUE")
        K2 = True
        J = 1 + J
    End If
    rSsc2.MoveNext
Loop

'-----End Of Instruction for that Operation-----

If K2 = True Then
    'rsACW5("CrValue") = Y
    rsACW4("L2CrVal") = Y
    rsACW4("CrValue") = Y
    rsACW4("L2CrName") = Y2
    rsACW4("L1CrName") = Z
    rsACW4("L1CrVal") = x
    rsACW4("TValue") = rsACW4("L1CrVal") * rsACW4("L2CrVal") * rsACW4("AltValue")
End If

```

```

'-----
J = 1
Do Until rsSC3.EOF

    If rsACW4("CrName") = rsSC3("SC3NAME") Then
        'v1 = RSSC2("sC2VALUE")
        Y = rsSC3("SC3VALUE")
        Y3 = rsSC3("SC3NAME")
        Z = rsSC3("NAME")

```

```

        x = rsSC3("GVALUE")
        z1 = rsSC3("MCNAME")
        X1 = rsSC3("MCVALUE")
        K3 = True
        J = 1 + J
    End If
    rsSC3.MoveNext
Loop
'-----End Of Instruction for that Operation-----

If K3 = True Then

    rsACW4("CrValue") = Y
    'rsACW4("L3CrVal") = Y
    'rsACW4("L3CrName") = Y3
    rsACW4("CrName") = Y3
    rsACW4("L2CrName") = Z
    rsACW4("L2CrVal") = x
    rsACW4("L1CrName") = z1
    rsACW4("L1CrVal") = X1
    rsACW4("TValue") = rsACW4("L1CrVal") * rsACW4("L2CrVal") * rsACW4("CrValue") *
rsACW4("AltValue")
End If

'-----

rsACW4.Update

Next R

db.Close
End Sub

Public Sub AltAdd5()
Dim g2 As Integer
Dim Y As Double
Dim x As Double
Dim Z As Variant
Dim X1 As Double
Dim z1 As Variant

Dim K1, K2, K3, K4 As Boolean
Dim Y2, Y3, y4 As Variant

Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")
Set rSsc2 = db.OpenRecordset("SubCr2")
Set rsSC3 = db.OpenRecordset("SubCr3")
Set rsSC4 = db.OpenRecordset("SubCr4")
Set rsMC = db.OpenRecordset("MAINCR")
Set rsACW5 = db.OpenRecordset("AltCrWeight5")
'----- The next programming code add the I.D No. for the main Criteria.

Tsql = "Delete from AltCrWeight5 where len(AltCrWeight5.CrName)=0 or isnull(AltCrWeight5.[AltID])"
db.Execute Tsql, dbFailOnError

Set rsTEMP = db.OpenRecordset("Select Max(AltCrWeight5.[AltID]) as Gmax From AltCrWeight5;")

If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
    g2 = 1
Else

```



```

    g2 = rsTEMP("Gmax") + 1
End If

'-----
For R = 1 To NoOfAlternative

    rsACW5.AddNew

    rsACW5("AltID") = g2

    rsACW5("CrName") = Label1(10).Caption
    'lstAlternatives.ListIndex = R - 1
    'rsACW5("AltName") = lstAlternatives.Text
    grdAlter.Col = R
    grdAlter.Row = 0
    rsACW5("AltName") = grdAlter.Text

    'rsACW5("GID") = g
    'rsSc2("SID") = s
    'rsSc2("SC2Row") = R
    'rsSc2("SC2Col") = 1
    grdAweight1.Col = 1
    grdAweight1.Row = R
    rsACW5("AltValue") = grdAweight1.Text

'-----Here The Program Will Retrieve The Weight For The Criteria Group Head-----

J = 1
Do Until rsMC.EOF

    If rsACW5("CrName") = rsMC("MCNAME") Then
        'v1 = RSSC2("sC2VALUE")
        Y = rsMC("MCVALUE")
        Z = rsMC("MCNAME")
    Else
        ' Y = 1
        K1 = True
        J = 1 + J
    End If
    rsMC.MoveNext
Loop

'-----
If K1 = True Then

    rsACW5("L1CrName") = Z
    rsACW5("L1CrVal") = Y
    rsACW5("CrValue") = Y
    rsACW5("TValue") = rsACW5("L1CrVal") * rsACW5("AltValue")

End If

'-----
J = 1
Do Until rSsc2.EOF

    If rsACW5("CrName") = rSsc2("SC2NAME") Then
        'v1 = RSSC2("sC2VALUE")
        Y = rSsc2("SC2VALUE")

```

```

        Y2 = rSsc2("SC2Name")
        Z = rSsc2("NAME")
        x = rSsc2("GVALUE")
        K2 = True
        J = 1 + J
    End If
    rSsc2.MoveNext
Loop
'-----End Of Instruction for that Operation-----
    If K2 = True Then
        'rsACW5("CrValue") = Y
        rsACW5("L2CrVal") = Y
        rsACW5("CrValue") = Y
        rsACW5("L2CrName") = Y2
        rsACW5("L1CrName") = Z
        rsACW5("L1CrVal") = x
        rsACW5("TValue") = rsACW5("L1CrVal") * rsACW5("L2CrVal") * rsACW5("AltValue")
    End If

'-----
    J = 1
    Do Until rsSC3.EOF

        If rsACW5("CrName") = rsSC3("SC3NAME") Then
            'v1 = RSSC2("sC2VALUE")
            Y = rsSC3("SC3VALUE")
            Y3 = rsSC3("SC3NAME")
            Z = rsSC3("NAME")
            x = rsSC3("GVALUE")
            z1 = rsSC3("MCNAME")
            X1 = rsSC3("MCVALUE")
            K3 = True
            J = 1 + J
        End If
        rsSC3.MoveNext
    Loop
'-----End Of Instruction for that Operation-----
    If K3 = True Then

        'rsACW5("CrValue") = Y
        rsACW5("CrValue") = Y
        rsACW5("L3CrVal") = Y
        rsACW5("L3CrName") = Y3
        rsACW5("L2CrName") = Z
        rsACW5("L2CrVal") = x
        rsACW5("L1CrName") = z1
        rsACW5("L1CrVal") = X1
        rsACW5("TValue") = rsACW5("L1CrVal") * rsACW5("L2CrVal") * rsACW5("L3CrVal") *
rsACW5("AltValue")
    End If
'-----
    J = 1
    Do Until rsSC4.EOF

        If rsACW5("CrName") = rsSC4("SC4NAME") Then
            'v1 = RSSC2("sC2VALUE")
            Y = rsSC4("SC4VALUE")
            Z = rsSC4("NAME")
            x = rsSC4("GVALUE")
            z1 = rsSC4("MCNAME")
            X1 = rsSC4("MCVALUE")

            z2 = rsSC4("SC2NAME")

```

```

        X2 = rsSC4("SC2VALUE")
        K4 = True
        J = 1 + J
    End If
    rsSC4.MoveNext
    Loop
'-----End Of Instruction for that Operation-----
    If K4 = True Then

        rsACW5("CrValue") = Y
        rsACW5("CrValue") = Y
        rsACW5("L3CrName") = Z
        rsACW5("L3CrVal") = x
        rsACW5("L1CrName") = z1
        rsACW5("L1CrVal") = X1

        rsACW5("L2CrName") = z2
        rsACW5("L2CrVal") = X2
        rsACW5("TValue") = rsACW5("L1CrVal") * rsACW5("L2CrVal") * rsACW5("L3CrVal") * rsACW5("CrValue") *
rsACW5("AltValue")
    End If
    rsACW5.Update

    Next R

    db.Close
End Sub

Public Sub ReteriData()
Dim X1 As Excel.Application
Dim a As Integer
Dim R As Integer
Dim C As Integer
Dim S As Integer
Dim NOcr As Integer
Dim ARRAY19() As Variant
Dim ARRAY29() As Double
Dim ARRAY39() As Variant
Dim ARRAY49() As Double
Dim ARRAY59() As Variant
Dim ARRAY69() As Double
Dim ARRAY79() As Variant
Dim ARRAY89() As Double
Dim ARRAY99() As Variant
Dim ARRAY109() As Double
Dim ARRAY209() As Double

Dim g2 As Integer

Dim x As Double
Dim Z As Variant
Dim v As Double
Dim Y As Variant

a = txtNoOfLevels

Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")
Set rsACW2 = db.OpenRecordset("AltCrWeight2")
Set rsACW3 = db.OpenRecordset("AltCrWeight3")
Set rsACW4 = db.OpenRecordset("AltCrWeight4")
Set rsACW5 = db.OpenRecordset("AltCrWeight5")

Set rsGroup = db.OpenRecordset("Groups")

```

NOcr = 100 \* NoOfCrAlt \* NoOfAlternative

```
ReDim ARRAY19(NOcr, 1) As Variant
ReDim ARRAY29(NOcr, 1) As Double
ReDim ARRAY39(NOcr, 1) As Variant
ReDim ARRAY49(NOcr, 1) As Double
ReDim ARRAY59(NOcr, 1) As Variant
ReDim ARRAY69(NOcr, 1) As Double
ReDim ARRAY79(NOcr, 1) As Variant
ReDim ARRAY89(NOcr, 1) As Double
ReDim ARRAY99(NOcr, 1) As Variant
ReDim ARRAY109(NOcr, 1) As Double
ReDim ARRAY209(NOcr, 1) As Double
```

```

'-----
C = 1
R = 1
If a = 3 Then
  Do Until rsACW2.EOF
    Grid1.Col = 1
    Grid1.Row = C
    If Grid1.Text = rsACW2("CrName") Then
      Y = rsACW2("CrValue")
      ARRAY19(R, 1) = Grid1.Text
      ARRAY29(R, 1) = Y
      ARRAY39(R, 1) = rsACW2("AltName")
      ARRAY49(R, 1) = rsACW2("AltValue")
      ARRAY209(R, 1) = rsACW2("TValue")
      R = R + 1
      S = S + 1
    End If
    If S > NoAl Then
      S = 1
      C = C + 1
    End If

    rsACW2.MoveNext
  Loop
  ' RetriDataLeV3
End If

```

```

I = 1

If a = 3 Then
  Do Until rsACW2.EOF

    If rsACW2("AltId") > 0 Then
      ARRAY19(I, 1) = rsACW2("CrName")
      ARRAY29(I, 1) = rsACW2("CrValue")
      ARRAY39(I, 1) = rsACW2("AltName")
      ARRAY49(I, 1) = rsACW2("AltValue")

      ARRAY209(I, 1) = rsACW2("TValue")

      I = I + 1
    End If
    rsACW2.MoveNext
  Loop
End If

I = 1

```

```

If a = 4 Then
  Do Until rsACW3.EOF
    .
    If rsACW3("AltId") > 0 Then
      ARRAY19(I, 1) = rsACW3("L1CrName")
      ARRAY29(I, 1) = rsACW3("L1CrVal")
      ARRAY39(I, 1) = rsACW3("CrName")
      ARRAY49(I, 1) = rsACW3("CrValue")
      ARRAY59(I, 1) = rsACW3("AltName")
      ARRAY69(I, 1) = rsACW3("AltValue")
      ARRAY209(I, 1) = rsACW3("TValue")

      I = I + 1
    End If

    rsACW3.MoveNext
  Loop
End If

If a = 5 Then
  Do Until rsACW4.EOF
    .
    If rsACW4("AltId") > 0 Then
      ARRAY19(I, 1) = rsACW4("L1CrName")
      ARRAY29(I, 1) = rsACW4("L1CrVal")
      ARRAY39(I, 1) = rsACW4("L2CrName")
      ARRAY49(I, 1) = rsACW4("L2CrVal")
      ARRAY59(I, 1) = rsACW4("CrName")
      ARRAY69(I, 1) = rsACW4("CrValue")
      ARRAY79(I, 1) = rsACW4("AltName")
      ARRAY89(I, 1) = rsACW4("AltValue")
      ARRAY209(I, 1) = rsACW4("TValue")

      I = I + 1
    End If

    rsACW4.MoveNext
  Loop
End If

If a = 6 Then
  Do Until rsACW5.EOF
    .
    If rsACW5("AltId") > 0 Then
      ARRAY19(I, 1) = rsACW5("L1CrName")
      ARRAY29(I, 1) = rsACW5("L1CrVal")
      ARRAY39(I, 1) = rsACW5("L2CrName")
      ARRAY49(I, 1) = rsACW5("L2CrVal")
      ARRAY59(I, 1) = rsACW5("L3CrName")
      ARRAY69(I, 1) = rsACW5("L3CrVal")
      ARRAY79(I, 1) = rsACW5("CrName")
      ARRAY89(I, 1) = rsACW5("CrValue")
      ARRAY99(I, 1) = rsACW5("AltName")
      ARRAY109(I, 1) = rsACW5("AltValue")
      ARRAY209(I, 1) = rsACW5("TValue")

```

```

        I = I + 1
    End If
rsACW5.MoveNext

```

```

Loop

```

```

End If

```

```

End Sub

```

```

Public Sub SynthesisF()
    Dim ARRAYM() As Variant
    Dim ARRAYM1() As Double
    Dim ARRAYTV() As Double
    Dim x As Double
    Dim Y As Double
    Dim NoAl As Integer
    Dim NoCA As Integer
    Dim C As Integer
    Dim R, R1 As Integer
    Dim Y1 As Double
    Dim Y2 As Double
    Dim J As Integer
    Dim a As Integer
    Dim F As Integer

```

```

    Dim ARRAY19() As Variant
    Dim ARRAY29() As Double
    Dim ARRAY39() As Variant
    Dim ARRAY49() As Double
    Dim ARRAY59() As Variant
    Dim ARRAY69() As Double
    Dim ARRAY79() As Variant
    Dim ARRAY89() As Double
    Dim ARRAY99() As Variant
    Dim ARRAY109() As Double
    Dim ARRAY209() As Double

```

```

Set db = OpenDatabase(App.Path & "\ & "Alirezam.mdb")
Set rSsc2 = db.OpenRecordset("SubCr2")

```

```

Set rsMC = db.OpenRecordset("MAINCR")
Set rsACW2 = db.OpenRecordset("AltCrWeight2")
Set rsACW3 = db.OpenRecordset("AltCrWeight3")
Set rsACW4 = db.OpenRecordset("AltCrWeight4")
Set rsACW5 = db.OpenRecordset("AltCrWeight5")
Set rsSynthesis = db.OpenRecordset("synthesis")
NoAl = NoOfAlternative
NoCA = NoOfCrAlt.Text
a = tdaNoOfLevels.Text

```

```

F = 1

```

```

ReDim ARRAYM(NoCA, 1) As Variant
ReDim ARRAYM1(NoAl, NoCA) As Double
ReDim ARRAYTV(NoAl) As Double

```

```

GrdInAltDat1.Row = 1

For R = 1 To NoCA
  GrdInAltDat1.Col = 1
  ARRAYM(R, 1) = GrdInAltDat1.Text
  Grid1.Col = 1
  Grid1.Row = R
  Grid1.Text = ARRAYM(R, 1)
  F = (NoOfAlternative + 2) + F

  'GrdInAltDat1.Row = R + (R * NoOfAlternative) + 1
  GrdInAltDat1.Row = F
Next R

NOcr = NoOfCrAlt * NoOfAlternative

ReDim ARRAY19(NOcr, 1) As Variant
ReDim ARRAY29(NOcr, 1) As Double
ReDim ARRAY39(NOcr, 1) As Variant
ReDim ARRAY49(NOcr, 1) As Double
ReDim ARRAY59(NOcr, 1) As Variant
ReDim ARRAY69(NOcr, 1) As Double
ReDim ARRAY79(NOcr, 1) As Variant
ReDim ARRAY89(NOcr, 1) As Double
ReDim ARRAY99(NOcr, 1) As Variant
ReDim ARRAY109(NOcr, 1) As Double
ReDim ARRAY209(NOcr, 1) As Double

R1 = 1
C = 1
R = 1

'-----
If a = 3 Then
  Do Until rsACW2.EOF
    Grid1.Col = 1
    Grid1.Row = C
    If Grid1.Text = rsACW2("CrName") Then
      Y = rsACW2("TValue")
      Grid2.Col = C
      Grid2.Row = R
      Grid2.Text = Y

      Grid100.Row = R1

      Grid100.Col = 1
      Grid100.Text = rsACW2("CrName")

      Grid100.Col = 2
      Grid100.Text = rsACW2("CrValue")

      Grid100.Col = 3
      Grid100.Text = rsACW2("AltName")

      Grid100.Col = 4
      Grid100.Text = rsACW2("AltValue")

      Grid100.Col = 5
      Grid100.Text = rsACW2("TValue")
    
```

```

    R1 = R1 + 1
    R = R + 1
End If
If R > NoAI Then
    R = 1
    C = C + 1
End If
rsACW2.MoveNext
Loop
End If

```

---

```

If a = 4 Then
Do Until rsACW3.EOF
    Grid1.Col = 1
    Grid1.Row = C
    If Grid1.Text = rsACW3("CrName") Then
        Y = rsACW3("TValue")

        Grid2.Col = C
        Grid2.Row = R
        Grid2.Text = Y
        R = R + 1
    End If
    If R > NoAI Then
        R = 1
        C = C + 1
    End If
    rsACW3.MoveNext
Loop
End If

```

---

```

If a = 5 Then
Do Until rsACW4.EOF
    Grid1.Col = 1
    Grid1.Row = C
    If Grid1.Text = rsACW4("CrName") Then
        Y = rsACW4("TValue")

        Grid2.Col = C
        Grid2.Row = R
        Grid2.Text = Y
        R = R + 1
    End If
    If R > NoAI Then
        R = 1
        C = C + 1
    End If
    rsACW4.MoveNext
Loop
End If

```

---

```

If a = 6 Then
Do Until rsACW5.EOF
    Grid1.Col = 1
    Grid1.Row = C
    If Grid1.Text = rsACW5("CrName") Then
        Y = rsACW5("TValue")

        Grid2.Col = C

```



```

Grid2.Row = R
Grid2.Text = Y
R = R + 1
End If
If R > NoAI Then
R = 1
C = C + 1
End If
rsACW5.MoveNext
Loop
End If

```

```

For R = 1 To NoAI

```

```

Y1 = 0
Y2 = 0

```

```

For C = 1 To NoCA
Grid2.Col = C
Grid2.Row = R
Y1 = Grid2.Text
Y2 = Y1 + Y2
ARRAYTV(R) = Y2
Next C

```

```

Next R

```

```

grdSynthesis.Cols = NoAI + 1

```

```

For R = 1 To NoOfAlternative
grdAweight1.Col = 0
grdAweight1.Row = R
grdSynthesis.Col = R
grdSynthesis.Row = 0
grdSynthesis.Text = grdAweight1.Text
Next R

```

```

For C = 1 To NoAI

```

```

grdSynthesis.Row = 1
grdSynthesis.Col = C
grdSynthesis.Text = ARRAYTV(C)
Next C

```

---

```

Y2 = ARRAYTV(1)

```

```

For C = 1 To NoAI

```

```

If Y2 > ARRAYTV(C) Then
Else
Y2 = ARRAYTV(C)
R = C
End If

```

```

Next C

```

```

lblsynthesis.Caption = "Choose Alternative No : " & R
Set db = OpenDatabase(App.Path & "\ " & "Alirezam.mdb")

```

```

Set rsSynthesis = db.OpenRecordset("Synthesis")

```

```

For R = 1 To NoAI
rsSynthesis.AddNew

```

```

'rsSynthesis("GID") = G
'rsSynthesis("SID") = S
grdAweight1.Col = 0
grdAweight1.Row = R
rsSynthesis("Decision-Maker") = DecisionMakerName
rsSynthesis("Alternatives") = grdAweight1.Text
lstAlternatives.ListIndex = R - 1
'rsSynthesis("Alternatives") = lstAlternatives.Text

rsSynthesis("Final Result") = ARRAYTV(R)
'rsSynthesis("Result") = Y2
'rsSynthesis("Message") = lblsynthesis.Caption
rsSynthesis.Update
Next R

db.Close

End Sub

Public Sub PlotData()
Dim I As Integer
Dim NOcr As Integer
Dim snglnew(10) As Double
On Error Resume Next

NoOfCriteria = txtNoOfCriteria.Text

Graph1.GraphTitle = "Criteria Weights"

Graph1.NumPoints = NoOfCriteria
Graph1.ThisPoint = 1
Graph1.AutoInc = 1
For I = 1 To NoOfCriteria
snglnew(NoOfCriteria) = Rnd(1) * I + 1
grdpweight.Col = 1
grdpweight.Row = I

Graph1.GraphData = grdpweight.Text

Next I
For I = 1 To NoOfCriteria
snglnew(NoOfCriteria) = Rnd(1) * I + 1
grdpweight.Col = 0
grdpweight.Row = I

Graph1.LabelText = grdpweight.Text

Graph1.DrawMode = 2

Next I

Graph1.Visible = True

End Sub

Public Sub START()
Dim L As Integer, I As Integer, R As Integer, C As Integer, X10 As Integer, x3 As Integer

lstcriteria.Clear

R = 1 + NoOfCriteria

```

```

'-----
' x = x + 1
' L = L + 1

' R = NoOfCriteria + 1
GridInputData.Col = C
GridInputData.Row = R
'-----
C = 1
GridInputData.Col = C
GridInputData.Row = R
CrNodeName = ""
CrNodeName = GridInputData.Text
C = 2
GridInputData.Col = C
GridInputData.Row = R
LevelNo = ""
LevelNo = GridInputData.Text
C = 3
txtNoOfCriteria = ""
'-----
GridInputData.Col = C
GridInputData.Row = R

txtNoOfCriteria = GridInputData.Text
If IsNull(txtNoOfCriteria.Text) = True Or Len(Trim(txtNoOfCriteria.Text)) = 0 Then
    Else
        grdpair.Cols = txtNoOfCriteria.Text + 1
        grdpair.Rows = txtNoOfCriteria.Text + 1
        grdpnormal.Cols = txtNoOfCriteria.Text + 1
        grdpnormal.Rows = txtNoOfCriteria.Text + 1
        grdPairBak.Cols = txtNoOfCriteria.Text + 1
        grdPairBak.Rows = txtNoOfCriteria.Text + 1
        grdpweight.Rows = txtNoOfCriteria + 1
        grdpcons.Cols = txtNoOfCriteria + 1
        lstcriteria.Clear
        ' lstcritriabak.Clear

        NoOfCriteria = txtNoOfCriteria.Text
    End If
'-----

C = 4

'-----
For R = R To (NoOfCriteria + R - 1)
GridInputData.Col = C
GridInputData.Row = R
'If KeyAscii = 13 Then
'    If Len(Trim(txtCriteria.Text)) > 0 Then
'        lstcriteria.AddItem UCase(GridInputData.Text)

'    txtCriteria.Text = ""

' End If
Next R
'-----

x3 = lstcriteria.ListCount
' If X <> NoOfCriteria Then
' MsgBox "No. Of criteria Does Not Match The Criteria ", vbCritical, "Test Project"
' Exit Sub

```

```

' End If

For I = 0 To x3 - 1
    grdpair.Row = I + 1
    grdpair.Col = 0
    grdpnormal.Row = I + 1
    grdpnormal.Col = 0
    grdPairBak.Row = I + 1
    grdPairBak.Col = 0
    lstcriteria.ListIndex = I
    grdpair.Text = lstcriteria.Text
    grdpnormal.Text = lstcriteria.Text
    grdPairBak.Text = lstcriteria.Text
Next
For I = 0 To x3 - 1
    grdpair.Col = I + 1
    grdpair.Row = 0
    grdpnormal.Col = I + 1
    grdpnormal.Row = 0
    grdPairBak.Col = I + 1
    grdPairBak.Row = 0
    lstcriteria.ListIndex = I
    grdpair.Text = lstcriteria.Text
    grdpnormal.Text = lstcriteria.Text
    grdPairBak.Text = lstcriteria.Text
Next
For I = 0 To x3 - 1
    grdpweight.Row = I + 1
    grdpweight.Col = 0
    lstcriteria.ListIndex = I
    grdpweight.Text = lstcriteria.Text
Next I
For I = 0 To x3 - 1
    grdpcons.Row = 0
    grdpcons.Col = I + 1
    lstcriteria.ListIndex = I
    grdpcons.Text = lstcriteria.Text
Next I
'-----
If L <= NoCrNodes Then 'And L <= NoCrNodes Then X10 = X10 + 1
R = NoOfCriteria + 1
L = L + 1

End If

X10 = X10 + 1
End Sub

```

```

Public Sub GrdHeadInDat()
Dim R As Integer, I As Integer
'-----

```

```

'-----THIS IS FOR THE OTHER GRID-- ALTTTERNATIVE GRID-----
' GrdInAltDat1.Col = 1
'GrdInAltDat1.Row = 0
'GrdInAltDat1.Text = "NoOfCr.-Alt."
GrdInAltDat1.Col = 1
GrdInAltDat1.Row = 0
'GridAltData.Text = "No Of Alt./Cr."
'GridAltData.Col = 1
GrdInAltDat1.Text = "Alt.Cr."
'GridAltData.Row = 1

```

```

GrdIn.AltDat1.Row = 0
GrdIn.AltDat1.Col = 2
GrdIn.AltDat1.Text = "NoOf.Alt."
GrdIn.AltDat1.Col = 3
GrdIn.AltDat1.Text = ".Alt."

For R = 1 To 999
GrdIn.AltDat1.Col = 0
GrdIn.AltDat1.Row = R
GrdIn.AltDat1.Text = R
Next R

For I = GrdIn.AltDat1.SelStartCol To GrdIn.AltDat1.SelEndCol

    GrdIn.AltDat1.ColWidth(I) = 880

Next I

```

```

'-----
GridInputData.Col = 1
GridInputData.Row = 0
GridInputData.Text = "Cr.Node "

GridInputData.Col = 2
GridInputData.Row = 0
GridInputData.Text = "Level.No."

GridInputData.Col = 3
GridInputData.Row = 0
GridInputData.Text = "NoOfCr."

GridInputData.Col = 4
GridInputData.Row = 0
GridInputData.Text = "Cr.Name "
'GridInputData.Col = 5
'GridInputData.Row = 0
'GridInputData.Text = "Cr. Name "
For R = 1 To 999
GridInputData.Col = 0
GridInputData.Row = R
GridInputData.Text = R
Next R
'For R = 1 To 6

' GridInputData.Col.Alignment(i) = 3
' Next R
'-----

If Key.Ascii = 13 Then
    Istercriteria.Clear
    ' Isteritriabak.Clear
    SendKeys "{TAB}", True
End If

'-----
For I = GridInputData.SelStartCol To GridInputData.SelEndCol

    GridInputData.ColWidth(I) = 880

Next I

```

```
For I = grd.Aweight.SelStartCol To grd.Aweight.SelEndCol
```

```
    grd.Aweight.ColWidth(I) = 880
```

```
Next I
```

```
End Sub
```

```
Public Sub Plot.AltData()
```

```
    Dim I As Integer
```

```
    Dim NOcr As Integer
```

```
    On Error Resume Next
```

```
    Dim snglnew(10) As Double
```

```
    ' NoOfCriteria = txtNoOfCriteria.Text
```

```
    Graph2.GraphTitle = "Alternatives Weights"
```

```
    Graph2.NumPoints = NoOf.Alternative
```

```
    Graph2.ThisPoint = 1
```

```
    Graph2.AutoInc = 1
```

```
    For I = 1 To NoOf.Alternative
```

```
        snglnew(NoOf.Alternative) = Rnd(1) * 1 - 1
```

```
        grd.Aweight1.Col = I
```

```
        grd.Aweight1.Row = I
```

```
    Graph2.GraphData = grd.Aweight1.Text
```

```
Next I
```

```
For I = 1 To NoOf.Alternative
```

```
    snglnew(NoOf.Alternative) = Rnd(1) * 1 - 1
```

```
    grd.Aweight1.Col = 0
```

```
    grd.Aweight1.Row = I
```

```
Graph2.LabelText = grd.Aweight1.Text
```

```
Graph2.DrawMode = 2
```

```
Next I
```

```
Graph2.Visible = True
```

```
End Sub
```

```
Public Sub AltConsisIndex()
```

```
    Dim R As Integer
```

```
    Dim C As Integer
```

```
    Dim Value As Double, Temp As Double
```

```
    Dim RI As Double
```

```
    Dim Msg As String
```

```
On Error Resume Next
```

```
Value = 0#
```

```
Temp = 0#
```

```
'For R = 1 To NoOf.Alternative
```

```
    grd.Aweight1.Col = 1
```

```
    grd.Acons.Row = 1
```

```

For C = 1 To NoOfAlternative

    grd.Aweight1.Row = C
    grd.Acons.Col = C
    Temp = grd.Acons.Text - grd.Aweight1.Text
    Value = Value - Temp

Next C

Next R

Set db = OpenDatabase(App.Path & " " & "Alirezam.mdb")
Set rsRnd = db.OpenRecordset("RandomIndex")
rsRnd.Index = "RID"
rsRnd.Seek "=", NoOfAlternative
RI = rsRnd("Rindex")

Msg = ""
Value = Value / NoOfAlternative
Temp = (Value - NoOfAlternative) / (NoOfAlternative - 1)
Label.AltCons = Temp - RI

Msg = Msg & Chr(13) & "Lambda Max = " & Format(Value, "===0.0000")
Msg = Msg & Chr(13) & "Consistency Index = " & Format(Temp, "===0.0000")

Msg = Msg & Chr(13) & "Random Index= " & RI
Msg = Msg & Chr(13) & "CI RI = " & Format((Temp - RI), "===0.0000")

If (Temp - RI) > 0.1 Then
    Msg = Msg & Chr(13) & "Degree of Consistency Is Satisfactory"
Else
    Msg = Msg & Chr(13) & "Degree of Consistency Is Not Satisfactory"
End If

inptval11 = MsgBox(Msg, vbOKCancel)

If inptval11 = vbOK Then

    filesave11

End If

If inptval11 = vbCancel Then

    MsgBox "Repeat Your Calculation"

Exit Sub
End If

End Sub

Public Sub filesave11()
Dim a As Integer
a = txtNoOfLevels
' If NoOfCrNode = 0 Or IsNull(NoOfCrNode) Then Exit Sub
If a = 3 Then

    Alt.Add2
    ElseIf a = 4 Then
    Alt.Add3
    ElseIf a = 5 Then
    Alt.Add4
    ElseIf a = 6 Then
    Alt.Add5
    ' ElseIf a = 7 Then

```

```

' .Alt.Add6
' .ElseIf a = 8 Then
' .Alt.Add7
End If

End Sub

Public Sub StoreInputData()

Dim xl As Object

Dim a As Integer
Dim NOcr1 As Integer
Dim NOcr2 As Integer
Dim ARRAY1() As Variant
Dim ARRAY2() As Double
Dim g2 As Integer
Dim NOcr As Integer
Dim x As Double
Dim Z As Variant
Dim v As Double
Dim Y As Variant
Dim J As Integer
Dim noCr2 As Integer
No.Al = NoOfAlternative

'a = txtNoOfLevels

' NOcr = NoOfCr.Alt * NoOfAlternative
NOcr1 = 60
ReDim ARRAY11(NOcr1, 1) As Variant
ReDim ARRAY21(NOcr1, 1) As Variant
ReDim ARRAY31(NOcr1, 1) As Variant
ReDim ARRAY41(NOcr1, 1) As Variant
ReDim ARRAY51(NOcr1, 1) As Variant
ReDim ARRAY61(NOcr1, 1) As Variant
ReDim ARRAY71(NOcr1, 1) As Variant
ReDim ARRAY81(NOcr1, 1) As Variant
ReDim ARRAY91(NOcr1, 1) As Variant
ReDim ARRAY101(NOcr1, 1) As Variant
ReDim ARRAY111(NOcr1, 1) As Variant
ReDim ARRAY121(NOcr1, 1) As Variant
ReDim ARRAY131(NOcr1, 1) As Variant
ReDim ARRAY141(NOcr1, 1) As Variant

ReDim ARRAY151(NOcr1, 1) As Variant
ReDim ARRAY161(NOcr1, 1) As Variant
ReDim ARRAY171(NOcr1, 1) As Variant
ReDim ARRAY181(NOcr1, 1) As Variant
ReDim ARRAY191(NOcr1, 1) As Variant
ReDim ARRAY200(NOcr1, 1) As Variant
ReDim ARRAY201(NOcr1, 1) As Variant
ReDim ARRAY202(NOcr1, 1) As Variant
ReDim ARRAY203(NOcr1, 1) As Variant
ReDim ARRAY204(NOcr1, 1) As Variant
ReDim ARRAY205(NOcr1, 1) As Variant
ReDim ARRAY206(NOcr1, 1) As Variant
ReDim ARRAY207(NOcr1, 1) As Variant

'-----OUTPUT DATA-----

```



```

Dim R As Integer
Dim C As Integer
Dim S As Integer
Dim NOCR As Integer
Dim ARRAY19() As Variant
Dim ARRAY29() As Double
Dim ARRAY39() As Variant
Dim ARRAY49() As Double
Dim ARRAY59() As Variant
Dim ARRAY69() As Double
Dim ARRAY79() As Variant
Dim ARRAY89() As Double
Dim ARRAY99() As Variant
Dim ARRAY109() As Double
Dim ARRAY209() As Double

```

```
a = txtNoOfLevels
```

```

Set db = OpenDatabase(App.Path & " " & "Alirezam.mdb")
Set rs.ACW2 = db.OpenRecordset("AltCrWeight2")
Set rs.ACW3 = db.OpenRecordset("AltCrWeight3")
Set rs.ACW4 = db.OpenRecordset("AltCrWeight4")
Set rs.ACW5 = db.OpenRecordset("AltCrWeight5")

```

```
Set rsGroup = db.OpenRecordset("Groups")
```

```
NOcr2 = NoOfCr.Alt * NoOfAlternative
```

```
NOcr = 60 * NoOfCr.Alt * NoOfAlternative
```

```

ReDim ARRAY19(NOcr2, 1) As Variant
ReDim ARRAY29(NOcr2, 1) As Double
ReDim ARRAY39(NOcr2, 1) As Variant
ReDim ARRAY49(NOcr2, 1) As Double
ReDim ARRAY59(NOcr2, 1) As Variant
ReDim ARRAY69(NOcr2, 1) As Double
ReDim ARRAY79(NOcr2, 1) As Variant
ReDim ARRAY89(NOcr2, 1) As Double
ReDim ARRAY99(NOcr2, 1) As Variant
ReDim ARRAY109(NOcr2, 1) As Double
ReDim ARRAY209(NOcr2, 1) As Double
ReDim ARRAYM(NoOfAlternative, 1) As Variant

```

```

'-----
'On Error GoTo OLE_ERROR

```

```

C = 1
R = 1

```

```
If a = 3 Then
```

```
For R = 1 To NOcr2
```

```

Grid100.Row = R

Grid100.Col = 1
ARRAY19(R, 1) = Grid100.Text
Grid100.Col = 2
ARRAY29(R, 1) = Grid100.Text
Grid100.Col = 3
ARRAY39(R, 1) = Grid100.Text

Grid100.Col = 4
ARRAY49(R, 1) = Grid100.Text
Grid100.Col = 5
ARRAY209(R, 1) = Grid100.Text
.
Next R
.
End If
-----END OF OUTPUT DATA FOR 3 LEVEL HEIRARCHY-----
.
I = 1
For I = 1 To NOfcrl
    GridInputData.Col = 1
    GridInputData.Row = I
    ARRAY11(I, 1) = GridInputData.Text

    GridInputData.Col = 2
    GridInputData.Row = I
    ARRAY21(I, 1) = GridInputData.Text

    GridInputData.Col = 3
    GridInputData.Row = I
    ARRAY31(I, 1) = GridInputData.Text

    GridInputData.Col = 4
    GridInputData.Row = I
    ARRAY41(I, 1) = GridInputData.Text

    GridInputData.Col = 5
    GridInputData.Row = I + 1
    ARRAY51(I, 1) = GridInputData.Text

    GridInputData.Col = 6
    GridInputData.Row = I + 1
    ARRAY61(I, 1) = GridInputData.Text

    GridInputData.Col = 7

```

```
GridInputData.Row = I - 1
.ARRAY71(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 8
GridInputData.Row = I - 1
.ARRAY81(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 9
GridInputData.Row = I - 1
.ARRAY91(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 10
GridInputData.Row = I - 1
.ARRAY101(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 11
GridInputData.Row = I - 1
.ARRAY111(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 12
GridInputData.Row = I - 1
.ARRAY121(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 13
GridInputData.Row = I - 1
.ARRAY131(L, 1) = GridInputData.Text
```

```
GridInputData.Col = 14
GridInputData.Row = I - 1
.ARRAY141(L, 1) = GridInputData.Text
```

```
GrdIn.AltDat1.Col = 1
GrdIn.AltDat1.Row = I - 1
.ARRAY151(L, 1) = GrdIn.AltDat1.Text
```

```
GrdIn.AltDat1.Col = 2
GrdIn.AltDat1.Row = I - 1
.ARRAY161(L, 1) = GrdIn.AltDat1.Text
```

```
GrdIn.AltDat1.Col = 3
GrdIn.AltDat1.Row = I - 1
.ARRAY171(L, 1) = GrdIn.AltDat1.Text
```

```
GrdIn.AltDat1.Col = 4
GrdIn.AltDat1.Row = I - 1
.ARRAY181(L, 1) = GrdIn.AltDat1.Text
```

```
GrdIn.AltDat1.Col = 5
GrdIn.AltDat1.Row = I - 1
.ARRAY191(L, 1) = GrdIn.AltDat1.Text
```

```

GrdIn.AltDat1.Col = 6
GrdIn.AltDat1.Row = I - 1
ARRAY200(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 7
GrdIn.AltDat1.Row = I - 1
ARRAY201(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 8
GrdIn.AltDat1.Row = I - 1
ARRAY202(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 9
GrdIn.AltDat1.Row = I - 1
ARRAY203(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 10
GrdIn.AltDat1.Row = I - 1
ARRAY204(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 11
GrdIn.AltDat1.Row = I - 1
ARRAY205(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 12
GrdIn.AltDat1.Row = I - 1
ARRAY206(I, 1) = GrdIn.AltDat1.Text

```

```

GrdIn.AltDat1.Col = 13
GrdIn.AltDat1.Row = I - 1
ARRAY207(I, 1) = GrdIn.AltDat1.Text

```

Next I

Load frmdecision

End Sub

```

Public Sub PlotDataSynthesis()
Dim I As Integer
Dim NOcr As Integer

```

```

Dim snglnew(10) As Double

```

```

Graph3.GraphTitle = "Synthesis"

```

```

Graph3.NumPoints = NoOfAlternative
Graph3.ThisPoint = 1
Graph3.AutoInc = 1

```

```

For I = 1 To NoOfAlternative
snglnew(NoOfAlternative) = Rnd(1) * I + 1
grdSynthesis.Col = I
grdSynthesis.Row = 1

```

```
'grd.Aweight1.Col = 0
'grd.Aweight1.Row = R
Graph3.GraphData = grdSynthesis.Text
'Graph3.LabelText = grd.Aweight1.Text
Next I
```

```
For I = 1 To NoOf.Alternative
snglnew(NoOf.Alternative) = Rnd(1) * I - 1
grdSynthesis.Col = I
grdSynthesis.Row = 0
```

```
Graph3.LabelText = grdSynthesis.Text
```

```
Graph3.DrawMode = 2
```

```
Next I
```

```
Graph3.Visible = True
End Sub
```

```
Public Sub SaveCrInput()
Dim xl As Object

Dim DM As Variant
Dim MO As Variant
Dim TOTALCR1 As Integer
Dim a As Integer
Dim NOcr1 As Integer
Dim NOcr2 As Integer
Dim ARRAY1() As Variant
Dim ARRAY2() As Double
Dim g2 As Integer
Dim NOcr As Integer
Dim x As Double
Dim Z As Variant
Dim v As Double
Dim Y As Variant
Dim J As Integer
```

```
Set db = OpenDatabase(App.Path & " " & ".Mirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rsAltIn = db.OpenRecordset("AlternativesInput")
```

```
Set rsLC.ANo = db.OpenRecordset("LevCr.AltNo")
```

```
Set rsGroup = db.OpenRecordset("Groups")
```

```
'-----
```

```
Tsql = "Delete from CriteriaInput where len(CriteriaInput.CrName)=0 or isnull(CriteriaInput.[GID])"
db.Execute Tsql, dbFailOnError
```

```
Set rsTEMP = db.OpenRecordset("Select Max(CriteriaInput.[GID]) as Gmax From CriteriaInput:")
```

```
If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
```

```
g2 = 1
```

```
Else
```

```
g2 = rsTEMP("Gmax") - 1
```

```
End If
```

```
'-----
```

```

TOTALCR1 = text2.Text
DM = DecisionMakerName
MO = MainObjective
NOcr1 = TOTALCR1 - NoOfCrNode - 1
NoAl = NoOfAlternative
NoCA = NoOfCrAlt
NLev = txtNoOfLevels
  For I = 1 To NOcr1

    rsCrIn.AddNew
    rsCrIn("GID") = g2
    rsCrIn("Decision-Maker") = DM
    rsCrIn("Objective") = MO

    GridInputData.Col = 1
    GridInputData.Row = I
    rsCrIn("Cr-Node") = GridInputData.Text

    GridInputData.Col = 2
    GridInputData.Row = I
    rsCrIn("LevelNo") = GridInputData.Text

    GridInputData.Col = 3
    GridInputData.Row = I
    rsCrIn("No-Of-Cr") = GridInputData.Text

    GridInputData.Col = 4
    GridInputData.Row = I
    rsCrIn("Cr-Name") = GridInputData.Text

    GridInputData.Col = 5
    GridInputData.Row = I
    rsCrIn("1") = GridInputData.Text

    GridInputData.Col = 6
    GridInputData.Row = I
    rsCrIn("2") = GridInputData.Text

    GridInputData.Col = 7
    GridInputData.Row = I
    rsCrIn("3") = GridInputData.Text

    GridInputData.Col = 8
    GridInputData.Row = I
    rsCrIn("4") = GridInputData.Text

    GridInputData.Col = 9
    GridInputData.Row = I
    rsCrIn("5") = GridInputData.Text

    GridInputData.Col = 10
    GridInputData.Row = I
    rsCrIn("6") = GridInputData.Text

    GridInputData.Col = 11
    GridInputData.Row = I
    rsCrIn("7") = GridInputData.Text

    GridInputData.Col = 12
    GridInputData.Row = I
    rsCrIn("8") = GridInputData.Text

    GridInputData.Col = 13

```

```

GridInputData.Row = I
rsCrIn("9") = GridInputData.Text

GridInputData.Col = I+4
GridInputData.Row = I
rsCrIn("10") = GridInputData.Text

rsCrIn.Update

Next I

db.Close

'

End Sub

Public Sub CRDataRetrieve()

Dim xl As Object
Dim DM1 As Variant
Dim MO1 As Variant
Dim DM As Variant
Dim MO As Variant
Dim a As Integer
Dim NOcr1 As Integer
Dim NOcr2 As Integer
Dim .ARR.AY1() As Variant
Dim .ARR.AY2() As Double
Dim g2 As Integer
Dim NOcr As Integer
Dim x As Double
Dim xR As Double
Dim Z As Variant
Dim v As Double
Dim Y As Variant
Dim J As Integer
Dim YY As Variant

Set db = OpenDatabase(App.Path & " " & ".Alirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rsAltIn = db.OpenRecordset("AlternativesInput")
Set rsLCANo = db.OpenRecordset("LevCrAltNo")

Set rsGroup = db.OpenRecordset("Groups")
'-----
GridInputData.Visible = True

For R = 1 To 30

For R1 = 1 To 998
GridInputData.Col = R
GridInputData.Row = R1
GridInputData.Text = ""
Next R1
Next R

xR = rsLCANo("GID")
' NO = InputBox("Enter YOUR ID")
NO = xR
Text2.Text = NO
I = 1

```

```

rsCrIn.Index = "GID"
rsCrIn.Seek "=", NO
If rsCrIn.NoMatch = False Then
    NO = rsCrIn("GID")

End If

Do Until rsCrIn.EOF
    If rsCrIn.NoMatch = False Then
        If rsCrIn("GID") = NO Then

            GridInputData.Col = 1
            GridInputData.Row = 1
            YY = rsCrIn("Cr-Node")
            GridInputData.Text = YY

            GridInputData.Col = 2
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("LevelNo")

            GridInputData.Col = 3
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("No-Of-Cr")

            GridInputData.Col = 4
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("Cr.Name")

            GridInputData.Col = 5
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("1")

            GridInputData.Col = 6
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("2")

            GridInputData.Col = 7
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("3")

            GridInputData.Col = 8
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("4")

            GridInputData.Col = 9
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("5")

            GridInputData.Col = 10
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("6")

            GridInputData.Col = 11
            GridInputData.Row = 1
            GridInputData.Text = rsCrIn("7")

```



```

GridInputData.Col = 12
GridInputData.Row = 1
GridInputData.Text = rsCrIn("8")

GridInputData.Col = 13
GridInputData.Row = 1
GridInputData.Text = rsCrIn("9")

GridInputData.Col = 14
GridInputData.Row = 1
GridInputData.Text = rsCrIn("10")

' End If
End If

' End If
I = I + 1
rsCrIn.MoveNext
Loop

' End If

End Sub

Public Sub LevCrAltInput()
Dim xl As Object

Dim DM As Variant
Dim MO As Variant
Dim a As Integer
Dim NOcr1 As Integer
Dim NOcr2 As Integer
Dim ARR.VV1() As Variant
Dim ARR.VV2() As Double
Dim g2 As Integer
Dim NOcr As Integer
Dim x As Double
Dim Z As Variant
Dim v As Double
Dim Y As Variant
Dim J As Integer

Set db = OpenDatabase(App.Path & " " & "Alirezam.mdb")
Set rsLC.\No = db.OpenRecordset("LevCrAltNo")

DM = DecisonMakerName
MO = MainObjective
NOcr1 = TotalCr - NoOfCrNode - 1
NoAl = NoOfAlternative

For I = 1 To NOcr1

rsCrIn.AddNew

rsCrIn("Decision-Maker") = DM
rsCrIn("Objective") = MO

rsCrIn.Update

```

```

Next I

db.Close

End Sub

Public Sub RetrievCR.ALTNO()

Set db = OpenDatabase(App.Path & " " & "Alirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rsAltIn = db.OpenRecordset("AlternativesInput")

Set rsLC.ANo = db.OpenRecordset("LevCr.AltNo")
FN = InputBox("File Name:")

    rsLC.ANo.Index = "FileName"
    rsLC.ANo.Seek "=", FN

    If rsLC.ANo.NoMatch = False Then
        NLev = rsLC.ANo("NoOfLevels")
        txtNoOfLevels.Text = NLev
        NoCA = rsLC.ANo("Cr-Alt-Nodes")
        NoOfCr.Alt.Text = NoCA

        DecisionMakerName.Text = rsLC.ANo("Decision-Maker")
        MainObjective = rsLC.ANo("Objective")
        frmdecision.Caption = rsLC.ANo("FileName")

        NoOfCrNode.Text = rsLC.ANo("NoOfCrNode")
        text2.Text = rsLC.ANo("TotalCr")
        Text4.Text = rsLC.ANo("No-Of-Alt")
        xR = rsLC.ANo("GID")

    End If

I = I

GI = xR

End Sub

Public Sub AltDataRetrieve()
Dim DM As Variant
Dim MO As Variant
Dim DM1 As Variant
Dim MO1 As Variant
Set db = OpenDatabase(App.Path & " " & "Alirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rsAltIn = db.OpenRecordset("AlternativesInput")
Set rsLC.ANo = db.OpenRecordset("LevCr.AltNo")
Set rsGroup = db.OpenRecordset("Groups")
'-----Alternatives Input-----
GrdIn.AltDat1.Visible = True

```

```

For R = 1 To 30
For R1 = 1 To 999
GrdIn.AltDat1.Col = R
GrdIn.AltDat1.Row = R1
GrdIn.AltDat1.Text = ""
Next R1
Next R
GI = xR
rs.AltIn.Index = "GID"
rs.AltIn.Seek "=", GI
If rs.AltIn.NoMatch = False Then

GI = rs.AltIn("GID")
End If
I = 1

Do Until rs.AltIn.EOF

' If rs.AltIn.NoMatch = False Then
If rs.AltIn("GID") = GI Then

'
'
'
GrdIn.AltDat1.Col = 1
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("Cr-Alt-Node")

' ListCR.ALT.ListIndex = I - 1
' ListCR.ALT.Text = rs.AltIn("Cr-Alt-Node")

GrdIn.AltDat1.Col = 2
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("No-Of-Alt")

GrdIn.AltDat1.Col = 3
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("Alternative")

GrdIn.AltDat1.Col = 4
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("1")

GrdIn.AltDat1.Col = 5
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("2")

GrdIn.AltDat1.Col = 6
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("3")

GrdIn.AltDat1.Col = 7
GrdIn.AltDat1.Row = 1
GrdIn.AltDat1.Text = rs.AltIn("4")

GrdIn.AltDat1.Col = 8

```

```

        GrdIn.AltDat1.Row = I
        GrdIn.AltDat1.Text = rs.AltIn("5")

        GrdIn.AltDat1.Col = 9
        GrdIn.AltDat1.Row = I
        GrdIn.AltDat1.Text = rs.AltIn("6")

    .

        GrdIn.AltDat1.Col = 10
        GrdIn.AltDat1.Row = I
        GrdIn.AltDat1.Text = rs.AltIn("7")

    .

        GrdIn.AltDat1.Col = 11
        GrdIn.AltDat1.Row = I
        GrdIn.AltDat1.Text = rs.AltIn("8")

    .

        GrdIn.AltDat1.Col = 12
        GrdIn.AltDat1.Row = I
        GrdIn.AltDat1.Text = rs.AltIn("9")

    .

        GrdIn.AltDat1.Col = 13
        GrdIn.AltDat1.Row = I
        GrdIn.AltDat1.Text = rs.AltIn("10")

    End If
    I = I + 1

    rs.AltIn.MoveNext

Loop

End Sub

Public Sub SaveCr.AltNodeLeNo()

Dim TCr As Integer
Dim No.Alt As Integer

Set db = OpenDatabase(App.Path & " " & ".Alirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rs.AltIn = db.OpenRecordset(".AlternativesInput")

Set rsLCANo = db.OpenRecordset("LevCr.AltNo")
'-----Level no. cr-alt nodes number-----
Tsql = "Delete from LevCr.AltNo where len(LevCr.AltNo.FileName)=0 or isnull(LevCr.AltNo.[GID])"
db.Execute Tsql, dbFailOnError

Set rsTEMP = db.OpenRecordset("Select Max(LevCr.AltNo.[GID]) as Gmax From LevCr.AltNo:")

If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
    g2 = 1
Else
    g2 = rsTEMP("Gmax") + 1
End If

'-----
DM = DecisionMakerName
MO = MainObjective
TCr = text2.Text
No.Alt = Text4.Text
'NOcr1 = TCr - NoOfCrNode - 1
No.Al = NoOfAlternative

```

```
NoCA = NoOfCrAlt
NLev = txtNoOfLevels
```

```
FName = InputBox("Save File .As")
```

```
Do Until rsLCANo.EOF
    If FName = rsLCANo("FileName") Then
        MsgBox "File Exists. Try To Save File Under A Different Name"
        'rsLCANo("FileName") = ""
        FName = InputBox("Save File .As")
    End If
```

```
rsLCANo.MoveNext
```

```
Loop
frmdecision.Caption = FName
```

```
For I = 1 To NOcr1
```

```
    rsLCANo.AddNew
    rsLCANo("GID") = g2
    rsLCANo("FileName") = FName
    rsLCANo("Decision-Maker") = DM
    rsLCANo("Objective") = MO
    rsLCANo("NoOfLevels") = NLev
    rsLCANo("Cr-Alt-Nodes") = NoCA
    rsLCANo("NOICrNode") = NoOfCrNode
    rsLCANo("TotalCr") = TCr
    rsLCANo("No-Of-Alt") = NoAlt
    rsLCANo.Update
```

```
Next I
```

```
db.Close
```

```
End Sub
```

```
Public Sub SaveAltInput()
```

```
Dim DM As Variant
Dim MO As Variant
```

```
Dim NOcr1 As Integer
Dim NOcr2 As Integer
```

```
Dim g2 As Integer
Dim NOcr As Integer
```

```
Set db = OpenDatabase(App.Path & " " & "Alirezam.mdb")
Set rsCrIn = db.OpenRecordset("CriteriaInput")
Set rsAltIn = db.OpenRecordset(".AlternativesInput")
```

```
DM = DecisonMakerName
MO = MainObjective
NOcr1 = TotalCr - NoOfCrNode - 1
NoAlt = Text4.Text
NOcr = NoOfAlternative
NoCA = NoOfCrAlt
NLev = txtNoOfLevels
Tsql = "Delete from AlternativesInput where len(AlternativesInput.Alternative)=0 or isnull(AlternativesInput.[GID])"
db.Execute Tsql, dbFailOnError
```

```

Set rsTEMP = db.OpenRecordset("Select Max(AlternativesInput.[GID]) as Gmax From AlternativesInput;")

If IsNull(rsTEMP!Gmax) Or Len(rsTEMP!Gmax) = 0 Then
    g2 = 1
Else
    g2 = rsTEMP("Gmax") - 1

End If

'-----Alternatives Input-----
NOcr2 = NoAI * NoCA - 2 * NoCA

    For I = 1 To NOcr2
        rs.AltIn.AddNew
        rs.AltIn("Decision-Maker") = DecisionMakerName
        rs.AltIn("Objective") = MainObjective
        .
        .
        rs.AltIn("GID") = g2
        GrdIn.AltDat1.Col = 1
        GrdIn.AltDat1.Row = I
        rs.AltIn("Cr-Alt-Node") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 2
        GrdIn.AltDat1.Row = I
        rs.AltIn("No-Of-Alt") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 3
        GrdIn.AltDat1.Row = I
        rs.AltIn("Alternative") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 4
        GrdIn.AltDat1.Row = I
        rs.AltIn("1") = GrdIn.AltDat1.Text
        .
        .
        GrdIn.AltDat1.Col = 5
        GrdIn.AltDat1.Row = I
        rs.AltIn("2") = GrdIn.AltDat1.Text
        .
        .
        GrdIn.AltDat1.Col = 6
        GrdIn.AltDat1.Row = I
        rs.AltIn("3") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 7
        GrdIn.AltDat1.Row = I
        rs.AltIn("4") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 8
        GrdIn.AltDat1.Row = I
        rs.AltIn("5") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 9
        GrdIn.AltDat1.Row = I
        rs.AltIn("6") = GrdIn.AltDat1.Text
        .
        GrdIn.AltDat1.Col = 10
        GrdIn.AltDat1.Row = I
        rs.AltIn("7") = GrdIn.AltDat1.Text
    
```

```

    .
    GrdIn.AltDat1.Col = 11
    GrdIn.AltDat1.Row = 1
    rs.AltIn("8") = GrdIn.AltDat1.Text
    .
    GrdIn.AltDat1.Col = 12
    GrdIn.AltDat1.Row = 1
    rs.AltIn("9") = GrdIn.AltDat1.Text
    .
    GrdIn.AltDat1.Col = 13
    GrdIn.AltDat1.Row = 1
    rs.AltIn("10") = GrdIn.AltDat1.Text
rs.AltIn.Update
Next I
db.Close
End Sub

```

## ***APPENDIX C***

### ***Input Data Files***



<i>GID</i>	<i>FileName</i>	<i>Decision-Maker</i>	<i>Objective</i>	<i>NbOfLevels</i>	<i>Cr-Alt-Nodes</i>	<i>NOfCrNode</i>	<i>TotalCr</i>	<i>NofAlt</i>
<i>1</i>	<i>BMRS</i>	<i>ALIRED A</i>	<i>BMRS</i>	<i>5</i>	<i>49</i>	<i>15</i>	<i>63</i>	<i>3</i>

INITIAL INPUT DATA

GID	Decision-Maker	Objective	Cr-Node	LevelNo	No-Of-Cr	CrName	1	2	3	4	5	6	7	8	9	10
1	ALIREDA	BMRS	BMRS	1	3	PROJ	1	0.5	0.5							
1	ALIREDA	BMRS				SYST		1	1							
1	ALIREDA	BMRS				VEND			1							
1	ALIREDA	BMRS					COST			ACCE						
1	ALIREDA	BMRS	PROJ	2	4	COST	1	1	0.5	0.5						
1	ALIREDA	BMRS				T&M		1	0.2	1						
1	ALIREDA	BMRS				P&A			1	1						
1	ALIREDA	BMRS				ACCE				11						
1	ALIREDA	BMRS					OPER		COMP L	L&T						
1	ALIREDA	BMRS	SYST	2	4	OPER	1	4	1	1						
1	ALIREDA	BMRS				MC		1	0.143	0.143						
1	ALIREDA	BMRS				COMPL			1	1						
1	ALIREDA	BMRS				L&T				1						

GID	Decision-Maker	Objective	Cr-Node	LevelNo	No-Of-Cr	CrName	1	2	3	4	5	6	7	8	9	10
1	ALIRED A	BMRS					VR	VSDI	VSAC							
1	ALIRED A	BMRS	VEND	2	3	VR	1	0.5	0.5							
1	ALIRED A	BMRS				VSDI	1	1	1							
1	ALIRED A	BMRS				VSAC			1							
1	ALIRED A	BMRS					INIC	O&MC	SUC	A&RC	LEAC	DECC				
1	ALIRED A	BMRS	COST	3	6	INIC	1	0.5	2	2	2	4				
1	ALIRED A	BMRS				O&MC		1	2	1	2	4				
1	ALIRED A	BMRS				SUC			1	0.5	1	6				
1	ALIRED A	BMRS				A&RC				1	2	3				
1	ALIRED A	BMRS				LEAC					1	2				
1	ALIRED A	BMRS				DECC						1				
1	ALIRED A	BMRS					TIME	O&C	LOCA							
1	ALIRED A	BMRS	T&M	3	3	TIME	1	0.333	2							

GID	Decision-Maker	Objective	Cr-Node	Level/No	No-Of-Cr	CrName	1	2	3	4	5	6	7	8	9	10
1	ALIREDA	BMRS				O&C		1	4							
1	ALIREDA	BMRS				LOCA			1							
1	ALIREDA	BMRS					LP	EP	WAV							
1	ALIREDA	BMRS	P&A	3	3	LP	1	1	2							
1	ALIREDA	BMRS				EP		1	2							
1	ALIREDA	BMRS				WAV			1							
1	ALIREDA	BMRS					GOVA	PMTA	OWNA	EUA	PUBA					
1	ALIREDA	BMRS	ACCE	3	5	GOVA	1	2	2	2	2					
1	ALIREDA	BMRS				PMTA		1	0.5	0.333	0.333					
1	ALIREDA	BMRS				OWNA			1	0.333	0.25					
1	ALIREDA	BMRS				EUA				1	0.5					
1	ALIREDA	BMRS				PUBA					1					
1	ALIREDA	BMRS					RELI	AVAI	PROT	HEAT	POWE	CLIM	SECU			

GID	Decision-Maker	Objective	Cr-Node	Level/No	No-Of-Cr	CrName	1	2	3	4	5	6	7	8	9	10
1	ALIREDA	BMRS	OPER	3	7	RELI	1	1	2	4	5	4	1			
1	ALIREDA	BMRS				AVAI	1	1	2	2	2	4	1			
1	ALIREDA	BMRS				PROT			1	2	2	3	1			
1	ALIREDA	BMRS				HEAT				1	1	1	1			
1	ALIREDA	BMRS				POWE					1	1	1			
1	ALIREDA	BMRS				CLIM						1	1			
1	ALIREDA	BMRS				SECU							1			
1	ALIREDA	BMRS					DIME	PC	WEIG							
1	ALIREDA	BMRS	MC	3	3	DIME	1	1	1							
1	ALIREDA	BMRS				PC		1	1							
1	ALIREDA	BMRS				WEIG			1							
1	ALIREDA	BMRS					ISTA	OSTA	IS	COMP A	MF	OF				
1	ALIREDA	BMRS	COMP L	3	6	ISTA	1	0.25	0.25	0.2	0.5	1				

<i>GID</i>	<i>Decision-Maker</i>	<i>Objective</i>	<i>Cr-Node</i>	<i>LevalNo</i>	<i>No-Of-Cr</i>	<i>CrName</i>	<i>1</i>	<i>2</i>	<i>3</i>	<i>4</i>	<i>5</i>	<i>6</i>	<i>7</i>	<i>8</i>	<i>9</i>	<i>10</i>
1	ALIREDA	BMRS				OSTA		1	1	1	1	2				
1	ALIREDA	BMRS				IS			1	1	1	4				
1	ALIREDA	BMRS				COMPA				1	1	2				
1	ALIREDA	BMRS				MF					1	2				
1	ALIREDA	BMRS				OF						1				
1	ALIREDA	BMRS					SMA	TECS	EL	WL	TL					
1	ALIREDA	BMRS	L&T	3	5	SMA	1	1	0.333	0.25	1					
1	ALIREDA	BMRS				TECS		1	1	1	1					
1	ALIREDA	BMRS				EL			1	2	1					
1	ALIREDA	BMRS				WL				1	1					
1	ALIREDA	BMRS				TL					1					
1	ALIREDA	BMRS					AOTL	RTC	CONS							
1	ALIREDA	BMRS	VR	3	3	AOTL	1	0.25	0.333							

GID	Decision-Maker	Objective	Cr-Node	Level/No	No-Of-Cr	CrName	1	2	3	4	5	6	7	8	9	10
1	ALIREDA	BMRS				RTC		1	1							
1	ALIREDA	BMRS				CONS			1							
1	ALIREDA	BMRS					AOTE	QOEW	OSSFJ	WARR	OSM					
1	ALIREDA	BMRS	VSDI	3	5	AOTE	1	0.5	0.5	1	0.2					
1	ALIREDA	BMRS				QOEW		1	1	2	2					
1	ALIREDA	BMRS				OSSFJ			1	2	1					
1	ALIREDA	BMRS				WARR				1	0.333					
1	ALIREDA	BMRS				OSM					1					
1	ALIREDA	BMRS					DOCU	HLS	UT							
1	ALIREDA	BMRS	VSAC	3	3	DOCU	1	0.2	0.333							
1	ALIREDA	BMRS				HLS		1	1							
1	ALIREDA	BMRS				UT			1							















1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	525	526	527	528	529	530	531	532	533	534	535	536	537	538	539	540	541	542	543	544	545	546	547	548	549	550	551	552	553	554	555	556	557	558	559	560	561	562	563	564	565	566	567	568	569	570	571	572	573	574	575	576	577	578	579	580	581	582	583	584	585	586	587	588	589	590	591	592	593	594	595	596	597	598	599	600	601	602	603	604	605	606	607	608	609	610	611	612	613	614	615	616	617	618	619	620	621	622	623	624	625	626	627	628	629	630	631	632	633	634	635	636	637	638	639	640	641	642	643	644	645	646	647	648	649	650	651	652	653	654	655	656	657	658	659	660	661	662	663	664	665	666	667	668	669	670	671	672	673	674	675	676	677	678	679	680	681	682	683	684	685	686	687	688	689	690	691	692	693	694	695	696	697	698	699	700	701	702	703	704	705	706	707	708	709	710	711	712	713	714	715	716	717	718	719	720	721	722	723	724	725	726	727	728	729	730	731	732	733	734	735	736	737	738	739	740	741	742	743	744	745	746	747	748	749	750	751	752	753	754	755	756	757	758	759	760	761	762	763	764	765	766	767	768	769	770	771	772	773	774	775	776	777	778	779	780	781	782	783	784	785	786	787	788	789	790	791	792	793	794	795	796	797	798	799	800	801	802	803	804	805	806	807	808	809	810	811	812	813	814	815	816	817	818	819	820	821	822	823	824	825	826	827	828	829	830	831	832	833	834	835	836	837	838	839	840	841	842	843	844	845	846	847	848	849	850	851	852	853	854	855	856	857	858	859	860	861	862	863	864	865	866	867	868	869	870	871	872	873	874	875	876	877	878	879	880	881	882	883	884	885	886	887	888	889	890	891	892	893	894	895	896	897	898	899	900	901	902	903	904	905	906	907	908	909	910	911	912	913	914	915	916	917	918	919	920	921	922	923	924	925	926	927	928	929	930	931	932	933	934	935	936	937	938	939	940	941	942	943	944	945	946	947	948	949	950	951	952	953	954	955	956	957	958	959	960	961	962	963	964	965	966	967	968	969	970	971	972	973	974	975	976	977	978	979	980	981	982	983	984	985	986	987	988	989	990	991	992	993	994	995	996	997	998	999	1000	1001	1002	1003	1004	1005	1006	1007	1008	1009	1010	1011	1012	1013	1014	1015	1016	1017	1018	1019	1020	1021	1022	1023	1024	1025	1026	1027	1028	1029	1030	1031	1032	1033	1034	1035	1036	1037	1038	1039	1040	1041	1042	1043	1044	1045	1046	1047	1048	1049	1050	1051	1052	1053	1054	1055	1056	1057	1058	1059	1060	1061	1062	1063	1064	1065	1066	1067	1068	1069	1070	1071	1072	1073	1074	1075	1076	1077	1078	1079	1080	1081	1082	1083	1084	1085	1086	1087	1088	1089	1090	1091	1092	1093	1094	1095	1096	1097	1098	1099	1100	1101	1102	1103	1104	1105	1106	1107	1108	1109	1110	1111	1112	1113	1114	1115	1116	1117	1118	1119	1120	1121	1122	1123	1124	1125	1126	1127	1128	1129	1130	1131	1132	1133	1134	1135	1136	1137	1138	1139	1140	1141	1142	1143	1144	1145	1146	1147	1148	1149	1150	1151	1152	1153	1154	1155	1156	1157	1158	1159	1160	1161	1162	1163	1164	1165	1166	1167	1168	1169	1170	1171	1172	1173	1174	1175	1176	1177	1178	1179	1180	1181	1182	1183	1184	1185	1186	1187	1188	1189	1190	1191	1192	1193	1194	1195	1196	1197	1198	1199	1200	1201	1202	1203	1204	1205	1206	1207	1208	1209	1210	1211	1212	1213	1214	1215	1216	1217	1218	1219	1220	1221	1222	1223	1224	1225	1226	1227	1228	1229	1230	1231	1232	1233	1234	1235	1236	1237	1238	1239	1240	1241	1242	1243	1244	1245	1246	1247	1248	1249	1250	1251	1252	1253	1254	1255	1256	1257	1258	1259	1260	1261	1262	1263	1264	1265	1266	1267	1268	1269	1270	1271	1272	1273	1274	1275	1276	1277	1278	1279	1280	1281	1282	1283	1284	1285	1286	1287	1288	1289	1290	1291	1292	1293	1294	1295	1296	1297	1298	1299	1300	1301	1302	1303	1304	1305	1306	1307	1308	1309	1310	1311	1312	1313	1314	1315	1316	1317	1318	1319	1320	1321	1322	1323	1324	1325	1326	1327	1328	1329	1330	1331	1332	1333	1334	1335	1336	1337	1338	1339	1340	1341	1342	1343	1344	1345	1346	1347	1348	1349	1350	1351	1352	1353	1354	1355	1356	1357	1358	1359	1360	1361	1362	1363	1364	1365	1366	1367	1368	1369	1370	1371	1372	1373	1374	1375	1376	1377	1378	1379	1380	1381	1382	1383	1384	1385	1386	1387	1388	1389	1390	1391	1392	1393	1394	1395	1396	1397	1398	1399	1400	1401	1402	1403	1404	1405	1406	1407	1408	1409	1410	1411	1412	1413	1414	1415	1416	1417	1418	1419	1420	1421	1422	1423	1424	1425	1426	1427	1428	1429	1430	1431	1432	1433	1434	1435	1436	1437	1438	1439	1440	1441	1442	1443	1444	1445	1446	1447	1448	1449	1450	1451	1452	1453	1454	1455	1456	1457	1458	1459	1460	1461	1462	1463	1464	1465	1466	1467	1468	1469	1470	1471	1472	1473	1474	1475	1476	1477	1478	1479	1480	1481	1482	1483	1484	1485	1486	1487	1488	1489	1490	1491	1492
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------	------



## ***APPENDIX D***

### ***Output Data Files***





GO	SUP	NAME	VALUE	SCHEME	SCHEME	VALUE
2	2	PROJ	0.2	COST	0.1550	0.0310
2	2	PROJ	0.2	T&M	0.1629	0.0326
2	2	PROJ	0.2	P&A	0.4036	0.0807
2	2	PROJ	0.2	ACCE	0.2786	0.0557
3	3	SYST	0.4	OPER	0.2887	0.1155
3	3	SYST	0.4	MC	0.0552	0.0221
3	3	SYST	0.4	COMPL	0.3281	0.1312
3	3	SYST	0.4	L&T	0.3281	0.1312
4	4	VEND	0.4	VR	0.2000	0.0800
4	4	VEND	0.4	VSDI	0.4000	0.1600
4	4	VEND	0.4	VSAC	0.4000	0.1600

## SUB-CRITERIA (LEVEL II) WEIGHTS

STD	STD	MCName	MCValue	Name	Value	SCName	SCValue	SCValue
5	5	PROJ	0.2	COST	0.15495	INIC	0.2332	0.0072
5	5	PROJ	0.2	COST	0.15495	OMC	0.2593	0.0080
5	5	PROJ	0.2	COST	0.15495	SUC	0.1454	0.0045
5	5	PROJ	0.2	COST	0.15495	ARC	0.1983	0.0061
5	5	PROJ	0.2	COST	0.15495	LEAC	0.1121	0.0035
5	5	PROJ	0.2	COST	0.15495	DECC	0.0518	0.0016
6	6	PROJ	0.2	T&M	0.162875	TIME	0.2394	0.0078
6	6	PROJ	0.2	T&M	0.162875	OAC	0.6233	0.0203
6	6	PROJ	0.2	T&M	0.162875	LOCA	0.1373	0.0045
7	7	PROJ	0.2	P&A	0.4036	LP	0.4000	0.0323
7	7	PROJ	0.2	P&A	0.4036	EP	0.4000	0.0323
7	7	PROJ	0.2	P&A	0.4036	W/IV	0.2000	0.0161
8	8	PROJ	0.2	ACCE	0.2786	GOVA	0.3096	0.0173
8	8	PROJ	0.2	ACCE	0.2786	PMTA	0.0891	0.0050
8	8	PROJ	0.2	ACCE	0.2786	OWNA	0.1127	0.0063
8	8	PROJ	0.2	ACCE	0.2786	EUA	0.2049	0.0114
8	8	PROJ	0.2	ACCE	0.2786	PUBA	0.2837	0.0158
9	9	SYST	0.4	OPER	0.2887	RELI	0.2641	0.0305
9	9	SYST	0.4	OPER	0.2887	AVAI	0.2073	0.0239
9	9	SYST	0.4	OPER	0.2887	PROT	0.1463	0.0169
9	9	SYST	0.4	OPER	0.2887	HEAT	0.0861	0.0099
9	9	SYST	0.4	OPER	0.2887	POWE	0.0844	0.0097
9	9	SYST	0.4	OPER	0.2887	CLIM	0.0753	0.0087
9	9	SYST	0.4	OPER	0.2887	SECU	0.1364	0.0158
10	10	SYST	0.4	MC	0.05515	DIME	0.3333	0.0074

## SUB-CRITERIA (LEVEL III) WEIGHTS

STP	STP ID	MC Name	MC Value	MC	STP Value	MC Name	MC Value	STP Value
10	10	SYST	0.4	MC	0.05515	PC	0.3333	0.0074
10	10	SYST	0.4	MC	0.05515	WEIG	0.3333	0.0074
11	11	SYST	0.4	COMPL	0.3281	ISTA	0.0655	0.0086
11	11	SYST	0.4	COMPL	0.3281	OSTA	0.2079	0.0273
11	11	SYST	0.4	COMPL	0.3281	IS	0.2357	0.0309
11	11	SYST	0.4	COMPL	0.3281	COMPA	0.2177	0.0286
11	11	SYST	0.4	COMPL	0.3281	MF	0.1883	0.0247
11	11	SYST	0.4	COMPL	0.3281	OF	0.0849	0.0111
12	12	SYST	0.4	L&T	0.3281	SMA	0.1269	0.0167
12	12	SYST	0.4	L&T	0.3281	TECS	0.1903	0.0250
12	12	SYST	0.4	L&T	0.3281	EL	0.2684	0.0352
12	12	SYST	0.4	L&T	0.3281	WL	0.2242	0.0294
12	12	SYST	0.4	L&T	0.3281	TL	0.1903	0.0250
13	13	VEND	0.4	VR	0.2	AOTL	0.1263	0.0101
13	13	VEND	0.4	VR	0.2	RTC	0.4576	0.0366
13	13	VEND	0.4	VR	0.2	CONS	0.4161	0.0333
14	14	VEND	0.4	VSDI	0.4	AOTE	0.1028	0.0164
14	14	VEND	0.4	VSDI	0.4	QOEI	0.2762	0.0442
14	14	VEND	0.4	VSDI	0.4	OSSF	0.2320	0.0371
14	14	VEND	0.4	VSDI	0.4	WARR	0.1087	0.0174
14	14	VEND	0.4	VSDI	0.4	OSM	0.2803	0.0449
15	15	VEND	0.4	VSAC	0.4	DOCU	0.1149	0.0184
15	15	VEND	0.4	VSAC	0.4	HLS	0.4795	0.0767
15	15	VEND	0.4	VSAC	0.4	UT	0.4056	0.0649

## SUB-CRITERIA (LEVEL III) WEIGHTS

AltID	LCOptions	LCValue	LCOptions	LCValue	Criteria	Criteria	AltValue	TPValue
1	PROJ	0.2	COST	0.1550	INIC	0.2332	ALT 1	0.1261
1	PROJ	0.2	COST	0.1550	INIC	0.2332	ALT 2	0.4570
1	PROJ	0.2	COST	0.1550	INIC	0.2332	ALT 3	0.4168
2	PROJ	0.2	COST	0.1550	Q&MC	0.2593	ALT 1	0.1423
2	PROJ	0.2	COST	0.1550	Q&MC	0.2593	ALT 2	0.4288
2	PROJ	0.2	COST	0.1550	Q&MC	0.2593	ALT 3	0.4288
3	PROJ	0.2	COST	0.1550	SUC	0.1454	ALT 1	0.0993
3	PROJ	0.2	COST	0.1550	SUC	0.1454	ALT 2	0.1500
3	PROJ	0.2	COST	0.1550	SUC	0.1454	ALT 3	0.7507
4	PROJ	0.2	COST	0.1550	A&RC	0.1983	ALT 1	0.1149
4	PROJ	0.2	COST	0.1550	A&RC	0.1983	ALT 2	0.1822
4	PROJ	0.2	COST	0.1550	A&RC	0.1983	ALT 3	0.7028
5	PROJ	0.2	COST	0.1550	LEAC	0.1121	ALT 1	0.3333
5	PROJ	0.2	COST	0.1550	LEAC	0.1121	ALT 2	0.3333
5	PROJ	0.2	COST	0.1550	LEAC	0.1121	ALT 3	0.3333
6	PROJ	0.2	COST	0.1550	DECC	0.0518	ALT 1	0.3333
6	PROJ	0.2	COST	0.1550	DECC	0.0518	ALT 2	0.3333
6	PROJ	0.2	COST	0.1550	DECC	0.0518	ALT 3	0.3333
7	PROJ	0.2	T&M	0.1629	TIME	0.2394	ALT 1	0.4444
7	PROJ	0.2	T&M	0.1629	TIME	0.2394	ALT 2	0.4444
7	PROJ	0.2	T&M	0.1629	TIME	0.2394	ALT 3	0.1111
8	PROJ	0.2	T&M	0.1629	Q&C	0.6233	ALT 1	0.3333
8	PROJ	0.2	T&M	0.1629	Q&C	0.6233	ALT 2	0.3333
8	PROJ	0.2	T&M	0.1629	Q&C	0.6233	ALT 3	0.3333
9	PROJ	0.2	T&M	0.1629	LOCA	0.1373	ALT 1	0.3333
9	PROJ	0.2	T&M	0.1629	LOCA	0.1373	ALT 2	0.3333
9	PROJ	0.2	T&M	0.1629	LOCA	0.1373	ALT 3	0.3333

Output Data -- Weights of Alternatives with respect to Criteria

AltID	LiGName	LiGVal	LiGName	LiGVal	CrName	CrValue	AltName	AltValue	TValue
10	PROJ	0.2	P&A	0.4036	LP	0.4000	ALT1	0.3333	0.0108
10	PROJ	0.2	P&A	0.4036	LP	0.4000	ALT2	0.3333	0.0108
10	PROJ	0.2	P&A	0.4036	LP	0.4000	ALT3	0.3333	0.0108
11	PROJ	0.2	P&A	0.4036	EP	0.4000	ALT1	0.3333	0.0108
11	PROJ	0.2	P&A	0.4036	EP	0.4000	ALT2	0.3333	0.0108
11	PROJ	0.2	P&A	0.4036	EP	0.4000	ALT3	0.3333	0.0108
12	PROJ	0.2	P&A	0.4036	WAIV	0.2000	ALT1	0.3333	0.0054
12	PROJ	0.2	P&A	0.4036	WAIV	0.2000	ALT2	0.3333	0.0054
12	PROJ	0.2	P&A	0.4036	WAIV	0.2000	ALT3	0.3333	0.0054
13	PROJ	0.2	ACCE	0.2786	GOVA	0.3096	ALT1	0.3333	0.0058
13	PROJ	0.2	ACCE	0.2786	GOVA	0.3096	ALT2	0.3333	0.0058
13	PROJ	0.2	ACCE	0.2786	GOVA	0.3096	ALT3	0.3333	0.0058
14	PROJ	0.2	ACCE	0.2786	PMTA	0.0891	ALT1	0.5437	0.0027
14	PROJ	0.2	ACCE	0.2786	PMTA	0.0891	ALT2	0.3459	0.0017
14	PROJ	0.2	ACCE	0.2786	PMTA	0.0891	ALT3	0.1103	0.0005
15	PROJ	0.2	ACCE	0.2786	OWNA	0.1127	ALT1	0.5437	0.0034
15	PROJ	0.2	ACCE	0.2786	OWNA	0.1127	ALT2	0.3459	0.0022
15	PROJ	0.2	ACCE	0.2786	OWNA	0.1127	ALT3	0.1103	0.0007
16	PROJ	0.2	ACCE	0.2786	EUA	0.2049	ALT1	0.3333	0.0038
16	PROJ	0.2	ACCE	0.2786	EUA	0.2049	ALT2	0.3333	0.0038
16	PROJ	0.2	ACCE	0.2786	EUA	0.2049	ALT3	0.3333	0.0038
17	PROJ	0.2	ACCE	0.2786	PUBA	0.2837	ALT1	0.3333	0.0053
17	PROJ	0.2	ACCE	0.2786	PUBA	0.2837	ALT2	0.3333	0.0053
17	PROJ	0.2	ACCE	0.2786	PUBA	0.2837	ALT3	0.3333	0.0053
18	SYST	0.4	OPER	0.2887	RELI	0.2641	ALT1	0.1429	0.0044
18	SYST	0.4	OPER	0.2887	RELI	0.2641	ALT2	0.1429	0.0044
18	SYST	0.4	OPER	0.2887	RELI	0.2641	ALT3	0.7143	0.0218

Output Data -- Weights of Alternatives with respect to Criteria

AltID	LCSystem	LCVal	L2System	L2Val	System	CrVal	AltName	AltVal	TValue
19	SYST	0.4	OPER	0.2887	AVAI	0.2073	ALT1	0.3333	0.0080
19	SYST	0.4	OPER	0.2887	AVAI	0.2073	ALT2	0.3333	0.0080
19	SYST	0.4	OPER	0.2887	AVAI	0.2073	ALT3	0.3333	0.0080
20	SYST	0.4	OPER	0.2887	PROT	0.1463	ALT1	0.1429	0.0024
20	SYST	0.4	OPER	0.2887	PROT	0.1463	ALT2	0.1429	0.0024
20	SYST	0.4	OPER	0.2887	PROT	0.1463	ALT3	0.7143	0.0121
21	SYST	0.4	OPER	0.2887	HEAT	0.0861	ALT1	0.1992	0.0020
21	SYST	0.4	OPER	0.2887	HEAT	0.0861	ALT2	0.1992	0.0020
21	SYST	0.4	OPER	0.2887	HEAT	0.0861	ALT3	0.6017	0.0060
22	SYST	0.4	OPER	0.2887	POWE	0.0844	ALT1	0.3333	0.0032
22	SYST	0.4	OPER	0.2887	POWE	0.0844	ALT2	0.3333	0.0032
22	SYST	0.4	OPER	0.2887	POWE	0.0844	ALT3	0.3333	0.0032
23	SYST	0.4	OPER	0.2887	CLIM	0.0753	ALT1	0.1037	0.0009
23	SYST	0.4	OPER	0.2887	CLIM	0.0753	ALT2	0.2318	0.0020
23	SYST	0.4	OPER	0.2887	CLIM	0.0753	ALT3	0.6645	0.0058
24	SYST	0.4	OPER	0.2887	SECU	0.1364	ALT1	0.2000	0.0032
24	SYST	0.4	OPER	0.2887	SECU	0.1364	ALT2	0.4000	0.0063
24	SYST	0.4	OPER	0.2887	SECU	0.1364	ALT3	0.4000	0.0063
25	SYST	0.4	MC	0.0552	DIME	0.3333	ALT1	0.1492	0.0011
25	SYST	0.4	MC	0.0552	DIME	0.3333	ALT2	0.1607	0.0012
25	SYST	0.4	MC	0.0552	DIME	0.3333	ALT3	0.6902	0.0051
26	SYST	0.4	MC	0.0552	PC	0.3333	ALT1	0.1429	0.0011
26	SYST	0.4	MC	0.0552	PC	0.3333	ALT2	0.1429	0.0011
26	SYST	0.4	MC	0.0552	PC	0.3333	ALT3	0.7143	0.0053
27	SYST	0.4	MC	0.0552	WEIG	0.3333	ALT1	0.3333	0.0025
27	SYST	0.4	MC	0.0552	WEIG	0.3333	ALT2	0.3333	0.0025
27	SYST	0.4	MC	0.0552	WEIG	0.3333	ALT3	0.3333	0.0025

Output Data -- Weights of Alternatives with respect to Criteria

ALTD	Lighting	LCHVd	LactHome	LCHVd	Grading	C-Value	AltName	AltValue	TVale
28	SYST	0.4	COMPL	0.3281	ISTA	0.0655	ALT1	0.0703	0.0006
28	SYST	0.4	COMPL	0.3281	ISTA	0.0655	ALT2	0.3465	0.0030
28	SYST	0.4	COMPL	0.3281	ISTA	0.0655	ALT3	0.5831	0.0050
29	SYST	0.4	COMPL	0.3281	OSTA	0.2079	ALT1	0.1095	0.0030
29	SYST	0.4	COMPL	0.3281	OSTA	0.2079	ALT2	0.2624	0.0072
29	SYST	0.4	COMPL	0.3281	OSTA	0.2079	ALT3	0.6281	0.0171
30	SYST	0.4	COMPL	0.3281	IS	0.2357	ALT1	0.6667	0.0206
30	SYST	0.4	COMPL	0.3281	IS	0.2357	ALT2	0.1667	0.0052
30	SYST	0.4	COMPL	0.3281	IS	0.2357	ALT3	0.1667	0.0052
31	SYST	0.4	COMPL	0.3281	COMPA	0.2177	ALT1	0.0903	0.0026
31	SYST	0.4	COMPL	0.3281	COMPA	0.2177	ALT2	0.3537	0.0101
31	SYST	0.4	COMPL	0.3281	COMPA	0.2177	ALT3	0.5559	0.0159
32	SYST	0.4	COMPL	0.3281	MF	0.1883	ALT1	0.2102	0.0052
32	SYST	0.4	COMPL	0.3281	MF	0.1883	ALT2	0.2405	0.0059
32	SYST	0.4	COMPL	0.3281	MF	0.1883	ALT3	0.5493	0.0136
33	SYST	0.4	COMPL	0.3281	OF	0.0849	ALT1	0.1635	0.0018
33	SYST	0.4	COMPL	0.3281	OF	0.0849	ALT2	0.2967	0.0033
33	SYST	0.4	COMPL	0.3281	OF	0.0849	ALT3	0.5398	0.0060
34	SYST	0.4	LdT	0.3281	SMA	0.1269	ALT1	0.2000	0.0033
34	SYST	0.4	LdT	0.3281	SMA	0.1269	ALT2	0.4000	0.0067
34	SYST	0.4	LdT	0.3281	SMA	0.1269	ALT3	0.4000	0.0067
35	SYST	0.4	LdT	0.3281	TECS	0.1903	ALT1	0.5714	0.0143
35	SYST	0.4	LdT	0.3281	TECS	0.1903	ALT2	0.2857	0.0071
35	SYST	0.4	LdT	0.3281	TECS	0.1903	ALT3	0.1429	0.0036
36	SYST	0.4	LdT	0.3281	EL	0.2684	ALT1	0.1224	0.0043
36	SYST	0.4	LdT	0.3281	EL	0.2684	ALT2	0.3210	0.0113
36	SYST	0.4	LdT	0.3281	EL	0.2684	ALT3	0.5565	0.0196

Output Data -- Weights of Alternatives with respect to Criteria



AltID	AltName	LtCVal	LtCName	LtCVal	CrName	CrValue	AltName	AltValue	Total
37	SYST	0.4	L&T	0.3281	WL	0.2242	ALT1	0.1635	0.0048
37	SYST	0.4	L&T	0.3281	WL	0.2242	ALT2	0.2967	0.0087
37	SYST	0.4	L&T	0.3281	WL	0.2242	ALT3	0.5398	0.0159
38	SYST	0.4	L&T	0.3281	TL	0.1903	ALT1	0.1224	0.0031
38	SYST	0.4	L&T	0.3281	TL	0.1903	ALT2	0.3210	0.0080
38	SYST	0.4	L&T	0.3281	TL	0.1903	ALT3	0.5565	0.0139
39	VEND	0.4	VR	0.2000	AOTL	0.1263	ALT1	0.5000	0.0051
39	VEND	0.4	VR	0.2000	AOTL	0.1263	ALT2	0.2500	0.0025
39	VEND	0.4	VR	0.2000	AOTL	0.1263	ALT3	0.2500	0.0025
40	VEND	0.4	VR	0.2000	RTC	0.4576	ALT1	0.4000	0.0146
40	VEND	0.4	VR	0.2000	RTC	0.4576	ALT2	0.2000	0.0073
40	VEND	0.4	VR	0.2000	RTC	0.4576	ALT3	0.4000	0.0146
41	VEND	0.4	VR	0.2000	CONS	0.4161	ALT1	0.3868	0.0129
41	VEND	0.4	VR	0.2000	CONS	0.4161	ALT2	0.1695	0.0056
41	VEND	0.4	VR	0.2000	CONS	0.4161	ALT3	0.4437	0.0148
42	VEND	0.4	VSDI	0.4000	AOTE	0.1028	ALT1	0.1492	0.0025
42	VEND	0.4	VSDI	0.4000	AOTE	0.1028	ALT2	0.1607	0.0026
42	VEND	0.4	VSDI	0.4000	AOTE	0.1028	ALT3	0.6902	0.0114
43	VEND	0.4	VSDI	0.4000	QOEW	0.2762	ALT1	0.4000	0.0177
43	VEND	0.4	VSDI	0.4000	QOEW	0.2762	ALT2	0.2000	0.0088
43	VEND	0.4	VSDI	0.4000	QOEW	0.2762	ALT3	0.4000	0.0177
44	VEND	0.4	VSDI	0.4000	OSSF1	0.2320	ALT1	0.1492	0.0055
44	VEND	0.4	VSDI	0.4000	OSSF1	0.2320	ALT2	0.1607	0.0060
44	VEND	0.4	VSDI	0.4000	OSSF1	0.2320	ALT3	0.6902	0.0256
45	VEND	0.4	VSDI	0.4000	WARR	0.1087	ALT1	0.1865	0.0032
45	VEND	0.4	VSDI	0.4000	WARR	0.1087	ALT2	0.2341	0.0041
45	VEND	0.4	VSDI	0.4000	WARR	0.1087	ALT3	0.5794	0.0101

Output Data -- Weights of Alternatives with respect to Criteria

AltID	LCriName	LCriVal	LCriName	LCriVal	CriName	CriValue	AltName	AltValue	PValue
46	VEND	0.4	VSDI	0.4000	OSM	0.2803	ALT1	0.1587	0.0071
46	VEND	0.4	VSDI	0.4000	OSM	0.2803	ALT2	0.2508	0.0112
46	VEND	0.4	VSDI	0.4000	OSM	0.2803	ALT3	0.5905	0.0265
47	VEND	0.4	VSAC	0.4000	DOCU	0.1149	ALT1	0.6667	0.0123
47	VEND	0.4	VSAC	0.4000	DOCU	0.1149	ALT2	0.1667	0.0031
47	VEND	0.4	VSAC	0.4000	DOCU	0.1149	ALT3	0.1667	0.0031
48	VEND	0.4	VSAC	0.4000	HLS	0.4795	ALT1	0.3333	0.0256
48	VEND	0.4	VSAC	0.4000	HLS	0.4795	ALT2	0.3333	0.0256
48	VEND	0.4	VSAC	0.4000	HLS	0.4795	ALT3	0.3333	0.0256
49	VEND	0.4	VSAC	0.4000	UT	0.4056	ALT1	0.3333	0.0216
49	VEND	0.4	VSAC	0.4000	UT	0.4056	ALT2	0.3333	0.0216
49	VEND	0.4	VSAC	0.4000	UT	0.4056	ALT3	0.3333	0.0216

Output Data -- Weights of Alternatives with respect to Criteria

## *REFERENCES*






## REFERENCES:

1. **Project Management Institute (PMI), Standards Committee** "*A Guide to the Project Management, body of knowledge*", 1996 edition"  
P.A, USA.
2. **Macedo, M. C., Doborow, P.V., and O'Rourke, J.J. (1987).**  
"*Value Management for Construction*", John Wiley, New York.
3. **O'Brien, J.J. (1976),** "*Value Analysis in Design and Construction*",  
McGraw-Hill Book Co., New York.
4. **Keith, W. and Mitali, De;** *A fuzzy Multicriteria Model for Comparing Energy Projects; Energy (Oxford England);* V 12, P 599-613, July 1987.
5. **Chndrasekaran, G. and Ramesh, R.;** *Microcomputer Based Multiple Criteria Decision Support System for Strategic Planning: Information and Management* 12 P 163-72 April, 1987.
6. **Grandzol, John and Gershon, Mark;** *Multiple Criteria Decision Making: Quality Progress; January, 1994.*
7. **Parker, Donald E.;** *Value Engineering Theory; 1985, Value Foundation, Washington D.C., USA.*
8. **Moskowiz, H. and Wright, G.P.** "*Operations Research Techniques for Management*", 1979, Prentice-Hall Inc., NJ, USA.
9. **Lapin, L.L.,** *Quantitative Methods for Business Decision, 2<sup>nd</sup> Edition* 1981.
10. **Al-Jaroudi, Alireda. A, Maqbool Ahmed, Ammar. M. Ghadri;**  
*Value Engineering Study for Saudi ARAMCO Pump Station no.3 Riyadh Refinery fiber Optic System Project; This was a partial requirement of CEM-512, Value Engineering, December, 1996 .*
11. **Saudi Aramco** *Design Specifications and technical evaluation criteria for vendors, ER-3341, Replace 900 MHz Analog Microwave System, 1994, Saudi Aramco Technical Center, Dhahran Saudi Arabia.*
12. **Saudi Aramco, Engineering & Project Management Workshop Manual, 1988, Saudi Aramco Technical Center, Dhahran Saudi Arabia.**

13. **Radford, K.J.; Modern; Managerial Decision Making; Reston Publishing Company, Inc. Apprentice-Hall Company, Reston Virginia, 1992.**
14. **DATAPRO – Communications Series, “Article on Multiplexers”;** published July 1991; McGraw-Hill, Incorporated, NJ, USA.
15. **DATAPRO – Communications Series, “Article on Local Area Network”;** published August 1991; McGraw-Hill, Incorporated.
16. **DATAPRO – Communications Series, “Article on Designers Guide to Bridges and Routers”;** published August 1992; McGraw Hill, Incorporated, NJ, USA.
17. **DATAPRO – Communications Series, “Article on Modems”;** published August 1992; McGraw-Hill, Incorporated, NJ, USA.
18. **DATAPRO – Communications Series, “Article on Microwave”;** published February 1993; McGraw-Hill, Incorporated, NJ, USA.
19. **Hanratty P.J. & Joseph, (1992), “Decision-Making in Chemical Engineering and Expert Systems: Application of The AHP to Reactor Selection,”** *Computer Chem. Eng.*, Vol. 16, No. 9, PP. 849-860.
20. **Savvas, Pissarides; Interactive Multiple Criteria Optimization for Capital Budgeting; Master Thesis; University of Ottawa, Canada, 1994.**
21. **Reza K. , Hussien a., and Yvon G. (1988), “An Integrated Approach to Project Evaluation and Selection, IEEE Trans . Eng. Manag. Vol35, No. 4, PP. 2566-271.**
22. **Mitta D.A.(1993), “An Application of AHP: A Rank Ordering Of Computers Interfaces, Human Factors, 35 (1), PP. 141-157.**
23. **Roger. L. Freeman, Telecommunications Transmission Handbook Wiley Inter science Publications, New York, 1991.**
24. **Andreson, Sweeney And Williams, “Quantitative Methods For Business”, 1992, West Publishing Company, MN, USA.**
25. **Fatemeh Zahedi, “The Analytic Hierarchy Process (AHP)- A Survey Of The Method And Its Applications”, Interfaces 16, July-August, 1986, PP. 96-108.**
26. **Wayne L. Winston, Operations Research Applications And Algorithms, PWS-KENT, 1991.**

27. **Saaty.T.L.** *Multi-criteria Decision-Making, The Analytic hierarchy Process (AHP)*, 1988, RWS Publications, P.A, USA.
28. **AL-Sughaiyer M.** *"Application of Value Engineering on Public Projects in Saudi Arabia"*, Master Thesis; 1987; King Fahd University of Petroleum & Minerals.
29. **Albayrakoglu M.**, *"Justification Of New Manufacturing Technology: A Startegic Approach Using The Analytical Hierarchy Process"* . *Production And Inventory Journal* – 1<sup>st</sup> Quarter 1996, Pp. 71-76.
30. **Mustafa M.M & AL-Bahar F.**, *"Project Risk Assessment Using The Analytic Hierarchy Process"*, *IEEE Transaction on Engineering Management*, Vol., 38, NO. 1, February 1998.
31. **Abdelrazig A.A.**, *"Computerized AHP Model For Solving Bid No-Bid Decision Problem"*, Master Thesis, 1995; King Fahd University Of Petroleum & Minerals.

# IMAGE EVALUATION TEST TARGET (QA-3)

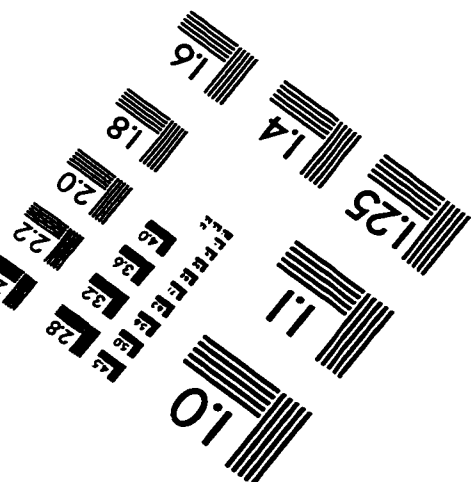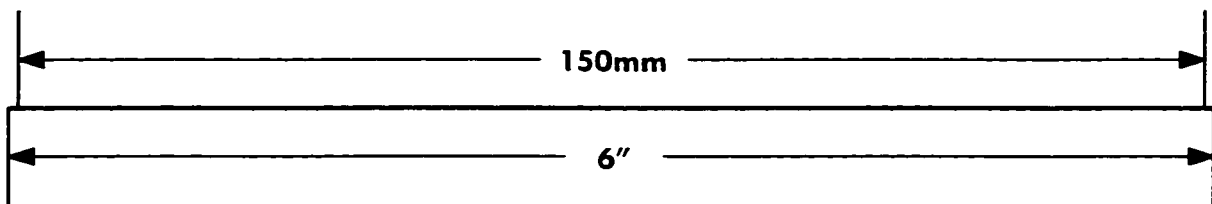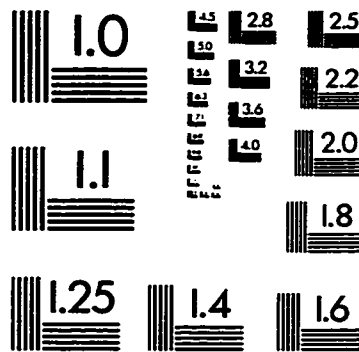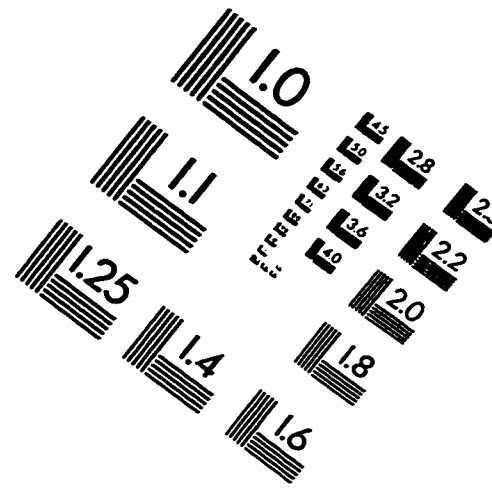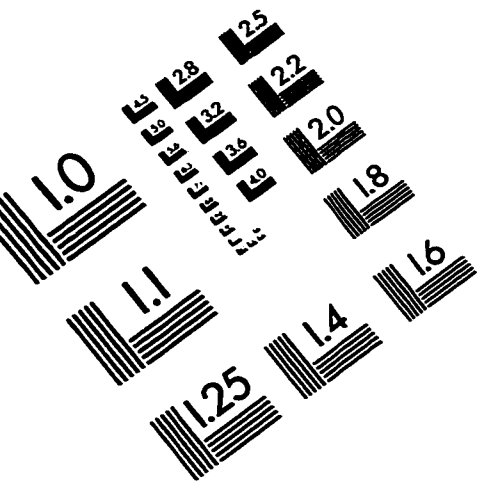

APPLIED IMAGE, Inc  
1653 East Main Street  
Rochester, NY 14609 USA  
Phone: 716/482-0300  
Fax: 716/288-5989

© 1993, Applied Image, Inc., All Rights Reserved

